SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo NeXtScale nx360 M5
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECint®_rate2006 = 1810

SPECint_rate_base2006 = 1750

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Dec-2016
Hardware Availability: Jan-2017
Software Availability: Sep-2016

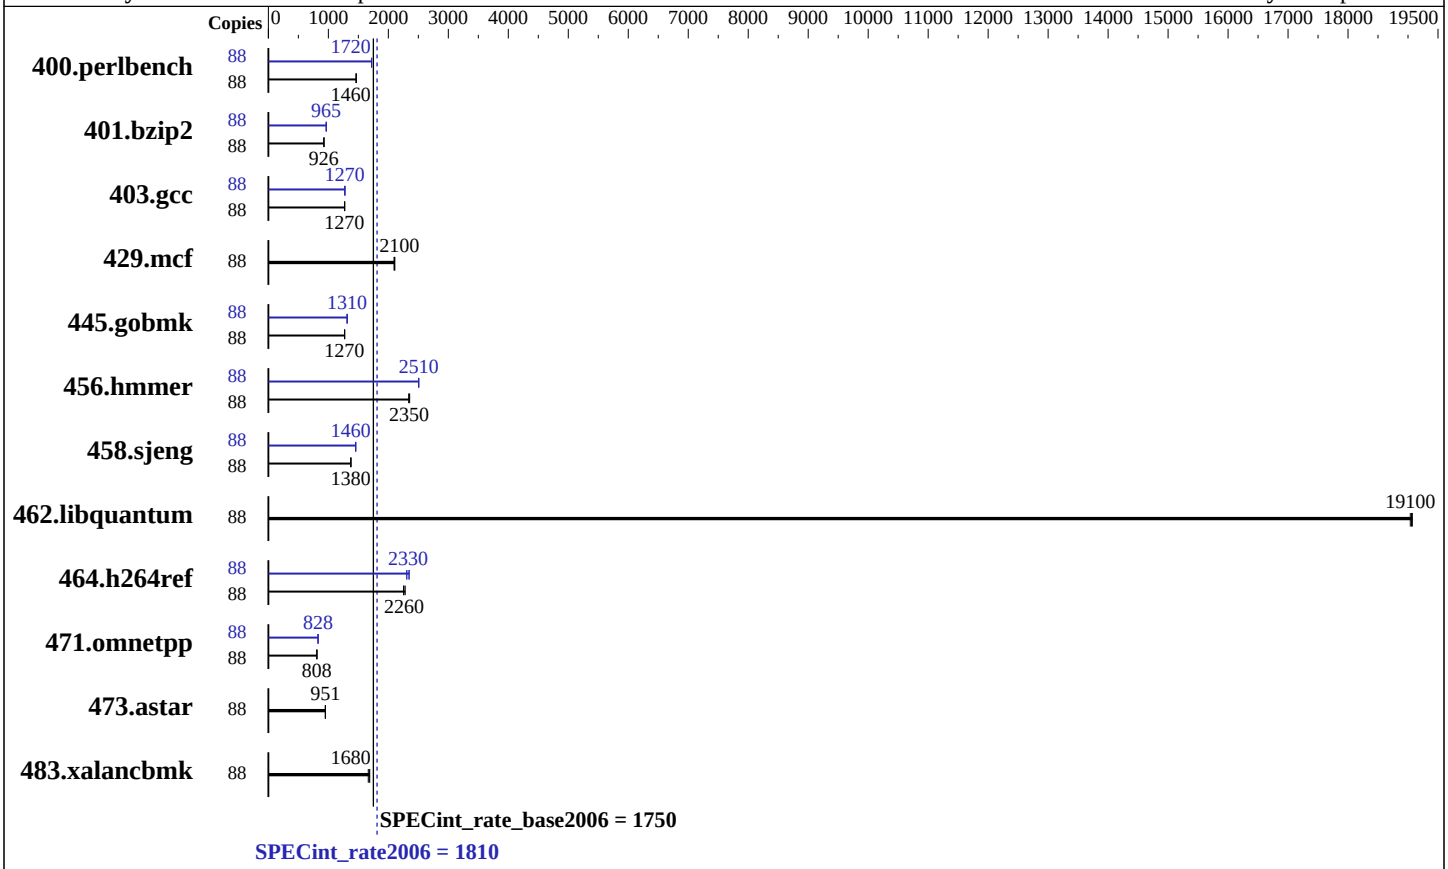

Hardware

CPU Name:	Intel Xeon E5-2699R v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	55 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo NeXtScale nx360 M5
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECint_rate2006 = 1810

SPECint_rate_base2006 = 1750

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Dec-2016
Hardware Availability: Jan-2017
Software Availability: Sep-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	88	587	1460	**587**	**1460**	588	1460	88	499	1720	500	1720	**500**	**1720**
401.bzip2	88	918	925	**917**	**926**	916	928	88	880	965	**880**	**965**	882	963
403.gcc	88	558	1270	**558**	**1270**	556	1270	88	**556**	**1270**	554	1280	557	1270
429.mcf	88	383	2090	381	2110	**381**	**2100**	88	383	2090	381	2110	**381**	**2100**
445.gobmk	88	**727**	**1270**	727	1270	725	1270	88	704	1310	**703**	**1310**	702	1310
456.hmmer	88	349	2360	**350**	**2350**	351	2340	88	328	2500	**328**	**2510**	327	2510
458.sjeng	88	774	1380	**774**	**1380**	774	1380	88	**731**	**1460**	732	1460	731	1460
462.libquantum	88	95.8	19000	95.6	19100	**95.7**	**19100**	88	95.8	19000	95.6	19100	**95.7**	**19100**
464.h264ref	88	**861**	**2260**	864	2250	854	2280	88	829	2350	**836**	**2330**	845	2300
471.omnetpp	88	679	810	681	808	**680**	**808**	88	663	829	**664**	**828**	665	827
473.astar	88	649	952	651	949	**650**	**951**	88	649	952	651	949	**650**	**951**
483.xalancbmk	88	365	1670	359	1690	**361**	**1680**	88	365	1670	359	1690	**361**	**1680**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS configuration:
Operating Mode set to Maximum Performance
COD Preference set to Enabled
 Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on nx360 Fri Dec 16 22:43:36 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2699R v4 @ 2.20GHz
```

Continued on next page

Platform Notes (Continued)

```
        2 "physical id"s (chips)
        88 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 22
        siblings  : 44
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
     cache size : 28160 KB

  From /proc/meminfo
     MemTotal:       263957944 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux nx360 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 16 22:41

  SPEC is set to: /home/cpu2006-1.2-ic17.0
     Filesystem     Type   Size  Used Avail Use% Mounted on
     /dev/sda2      btrfs  746G   32G  713G   5% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS LENOVO -[THE126N-2.20]- 09/07/2016
```

Continued on next page

Platform Notes (Continued)

```
      Memory:
       16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz

    (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-auto-ilp32 -qopt-mem-layout-trans=3`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3`

429.mcf: `basepeak = yes`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -qopt-mem-layout-trans=3`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4 -auto-ilp32 -qopt-mem-layout-trans=3`

462.libquantum: `basepeak = yes`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll2 -qopt-mem-layout-trans=3`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-ra-region-strategy=block -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-C.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-C.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:00:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.