SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint®_rate2006 = 1630

SPECint_rate_base2006 = 1560

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jan-2017
Hardware Availability: May-2016
Software Availability: Sep-2016

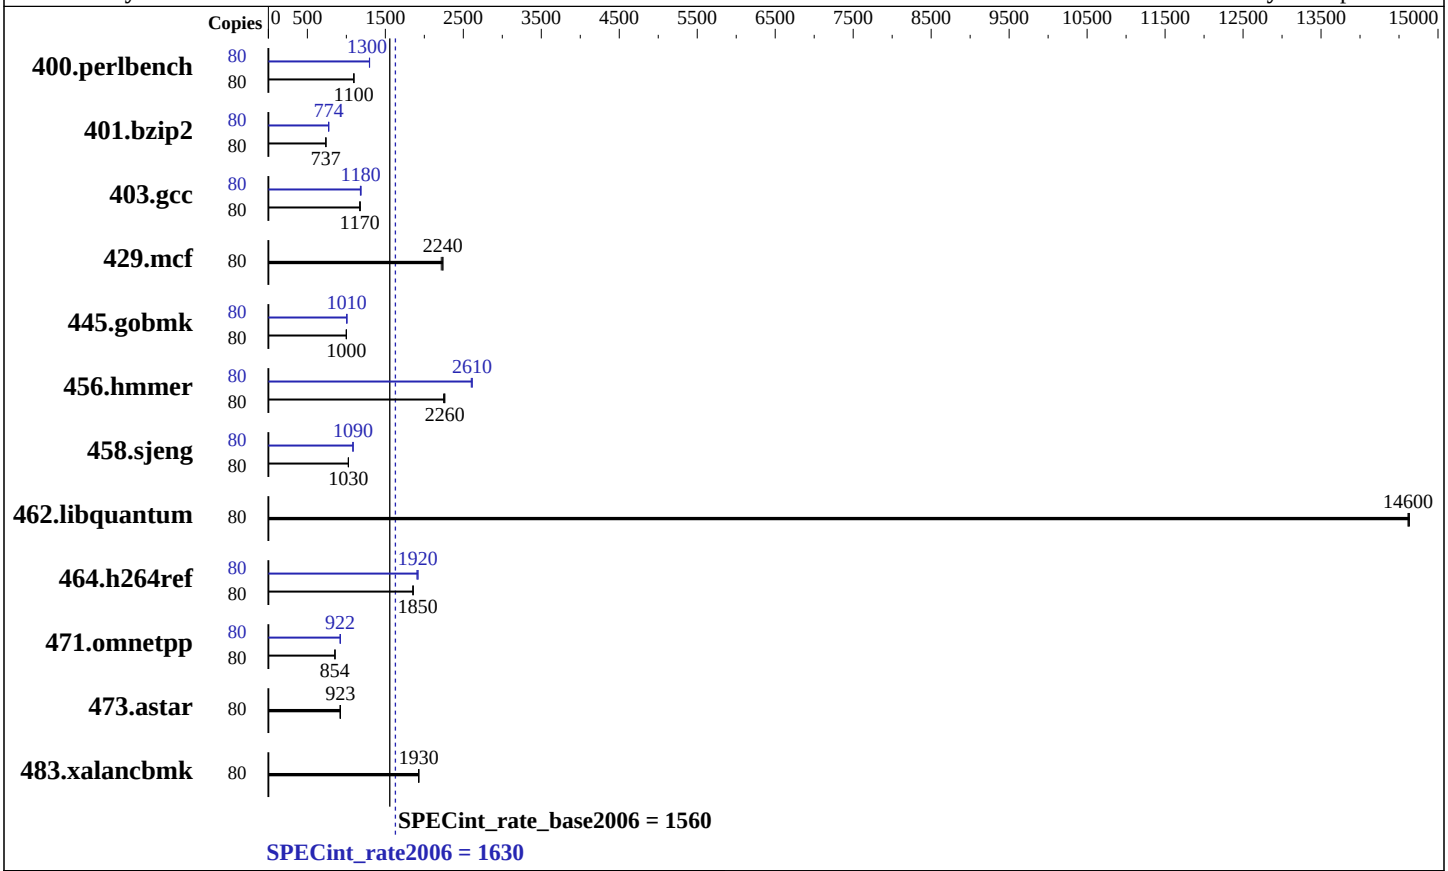

Hardware

CPU Name:	Intel Xeon E5-4620 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem:	2 x 800 GB SAS SSD, RAID 1
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP1 Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1630

SPECint_rate_base2006 = 1560

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jan-2017
Hardware Availability: May-2016
Software Availability: Sep-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	712	1100	714	1100	**713**	**1100**	80	603	1300	602	1300	**603**	**1300**
401.bzip2	80	1046	738	1047	737	**1047**	**737**	80	**998**	**774**	1000	772	997	774
403.gcc	80	549	1170	546	1180	**549**	**1170**	80	546	1180	542	1190	**544**	**1180**
429.mcf	80	**326**	**2240**	329	2220	326	2240	80	**326**	**2240**	329	2220	326	2240
445.gobmk	80	**839**	**1000**	839	1000	840	999	80	835	1000	834	1010	**834**	**1010**
456.hmmer	80	330	2260	332	2250	**330**	**2260**	80	**286**	**2610**	286	2610	287	2600
458.sjeng	80	**943**	**1030**	943	1030	943	1030	80	**892**	**1090**	892	1080	892	1090
462.libquantum	80	113	14600	113	14600	**113**	**14600**	80	113	14600	113	14600	**113**	**14600**
464.h264ref	80	952	1860	**955**	**1850**	955	1850	80	923	1920	929	1910	**924**	**1920**
471.omnetpp	80	585	854	**586**	**854**	586	854	80	542	923	**542**	**922**	543	921
473.astar	80	607	925	611	919	**608**	**923**	80	607	925	611	919	**608**	**923**
483.xalancbmk	80	**286**	**1930**	287	1930	286	1930	80	**286**	**1930**	287	1930	286	1930

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 echo 1 >       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 Power Profile set to Custom
 Power Regulator set to Static High Performance Mode
 Minimum Processor Idle Power Core C-State set to C6 State
 Minimum Processor Idle Power Package C-State set to No Package State
 Collaborative Power Control set to Disabled
 QPI Snoop Configuration set to Cluster on Die
 Thermal Configuration set to Maximum Cooling
 Processor Power and Utilization Monitoring set to Disabled
 Memory Refresh Rate set to 1x Refresh

 Sysinfo program /cpu/config/sysinfo.rev6993
```

Continued on next page

Platform Notes (Continued)

```
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on pl39 Thu Jan 12 07:45:28 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4620 v4 @ 2.10GHz
      4 "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
      physical 2: cores 0 1 2 3 4 8 9 10 11 12
      physical 3: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 12800 KB

From /proc/meminfo
   MemTotal:       529297324 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux pl39 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 11 11:33

SPEC is set to: /cpu
   Filesystem     Type  Size  Used Avail Use% Mounted on
```

Continued on next page

Platform Notes (Continued)

```
    /dev/sda2      xfs   745G   84G  661G  12% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS HP I38 05/05/2016
   Memory:
    16x HP 809083-091 32 GB 2 rank 2400 MHz, configured at 2133 MHz
    16x UNKNOWN NOT AVAILABLE

 (End of data from sysinfo program)
 Regarding the sysinfo display about the memory installed, the correct amount of
 memory is 512 GB and the dmidecode description should have one line reading as:
 16x HP 809083-091 32 GB 2 rank 2400 MHz, configured at 2133 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu/libs/32:/cpu/libs/64:/cpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
  401.bzip2: -D_FILE_OFFSET_BITS=64
    403.gcc: -D_FILE_OFFSET_BITS=64
    429.mcf: -D_FILE_OFFSET_BITS=64
  445.gobmk: -D_FILE_OFFSET_BITS=64
  456.hmmer: -D_FILE_OFFSET_BITS=64
  458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
  464.h264ref: -D_FILE_OFFSET_BITS=64
  471.omnetpp: -D_FILE_OFFSET_BITS=64
```

Continued on next page

Base Portability Flags (Continued)

473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Peak Portability Flags (Continued)

445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2)
`-qopt-ra-region-strategy=block`
`-qopt-mem-layout-trans=3 -Wl,-z,muldefs`
`-L/sh10.2 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:00:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.