SPEC® CFP2006 Result

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2623 v4, 2.60 GHz)

SPECfp®2006 = 95.3

SPECfp_base2006 = 91.2

CPU2006 license:	55	**Test date:**	Feb-2017
Test sponsor:	Dell Inc.	**Hardware Availability:**	Mar-2016
Tested by:	Dell Inc.	**Software Availability:**	Nov-2016

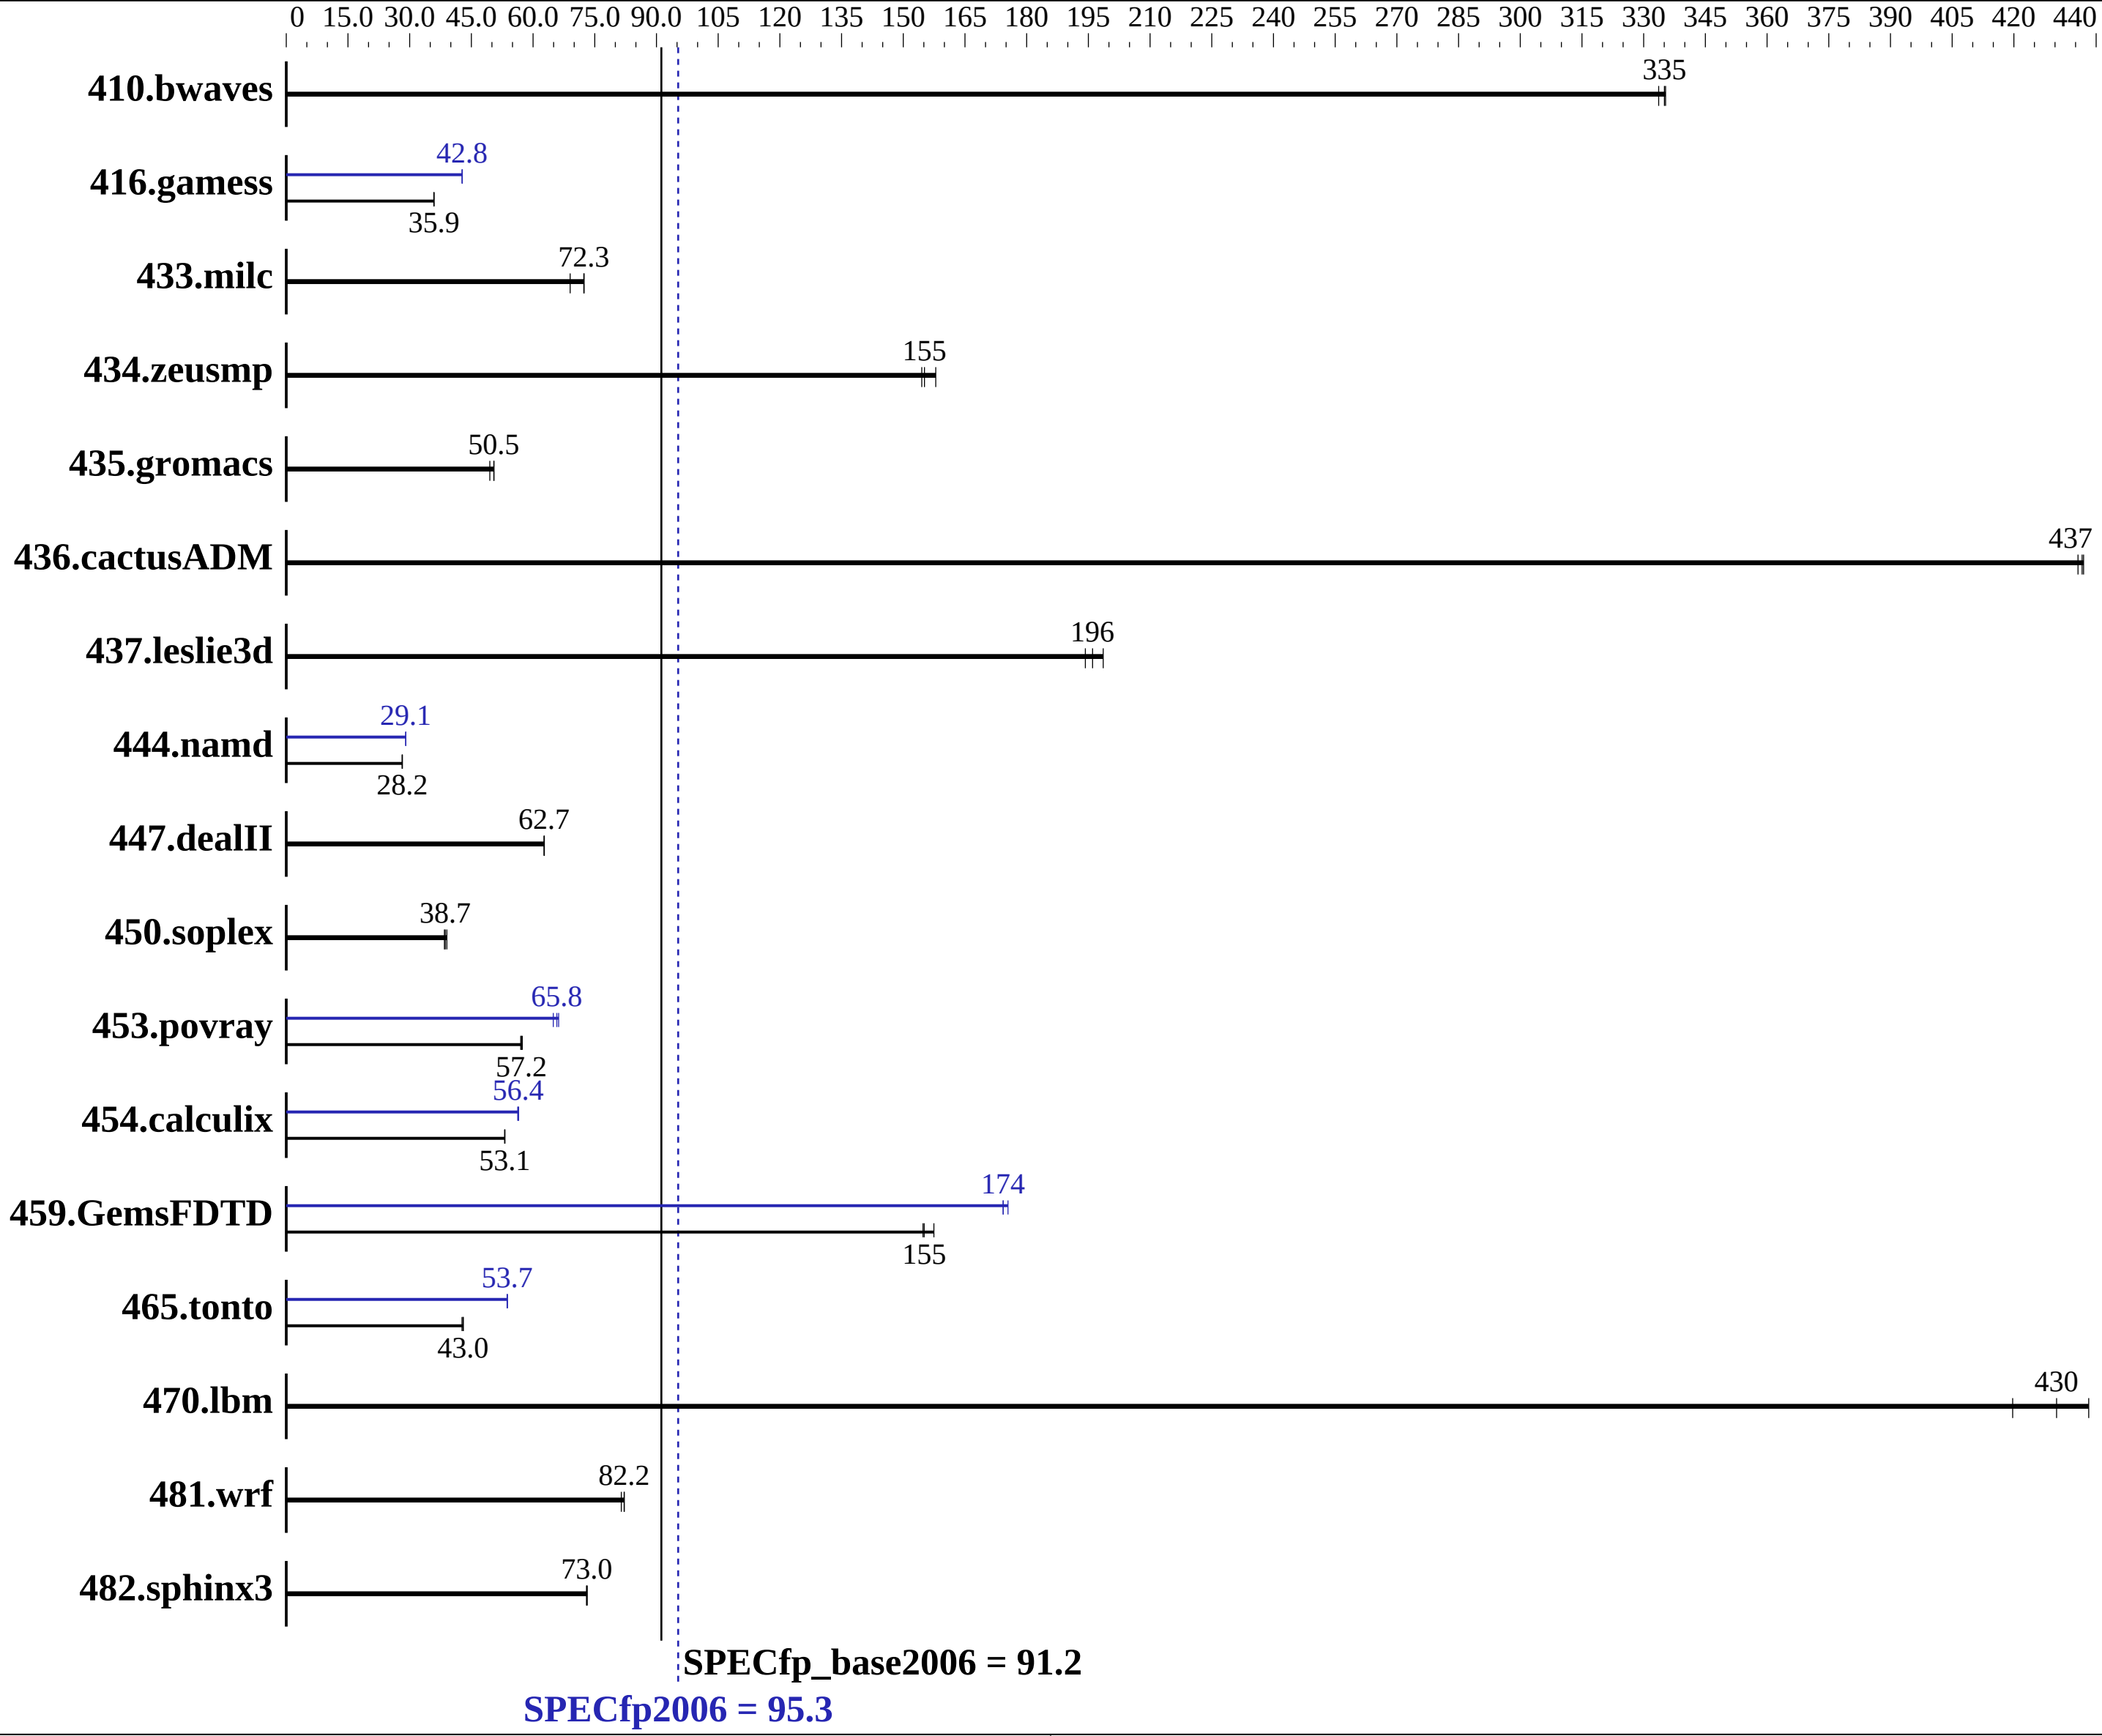

Hardware	
CPU Name:	Intel Xeon E5-2623 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	SUSE Linux Enterprise Server 12 3.12.28-4-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2623 v4, 2.60 GHz)

SPECfp2006 = 95.3

SPECfp_base2006 = 91.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.
Test date: Feb-2017
Hardware Availability: Mar-2016
Software Availability: Nov-2016

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 2 x 2000 GB 7200 RPM SAS RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40.5	335	40.7	334	**40.6**	**335**	40.5	335	40.7	334	**40.6**	**335**
416.gamess	**545**	**35.9**	545	35.9	546	35.9	**458**	**42.8**	457	42.8	458	42.7
433.milc	127	72.4	**127**	**72.3**	133	69.0	127	72.4	**127**	**72.3**	133	69.0
434.zeusmp	57.6	158	**58.7**	**155**	58.9	154	57.6	158	**58.7**	**155**	58.9	154
435.gromacs	**141**	**50.5**	141	50.5	144	49.5	**141**	**50.5**	141	50.5	144	49.5
436.cactusADM	**27.4**	**437**	27.4	436	27.3	437	**27.4**	**437**	27.4	436	27.3	437
437.leslie3d	48.4	194	**48.0**	**196**	47.3	199	48.4	194	**48.0**	**196**	47.3	199
444.namd	285	28.2	**284**	**28.2**	284	28.2	276	29.1	**276**	**29.1**	276	29.1
447.dealII	182	62.7	182	62.7	**182**	**62.7**	182	62.7	182	62.7	**182**	**62.7**
450.soplex	217	38.4	214	39.0	**216**	**38.7**	217	38.4	214	39.0	**216**	**38.7**
453.povray	93.3	57.0	**93.0**	**57.2**	92.7	57.4	**80.9**	**65.8**	82.0	64.9	80.3	66.2
454.calculix	155	53.1	155	53.1	**155**	**53.1**	146	56.5	**146**	**56.4**	147	56.3
459.GemsFDTD	**68.4**	**155**	68.5	155	67.4	157	60.9	174	60.5	175	**60.9**	**174**
465.tonto	**229**	**43.0**	230	42.7	229	43.0	183	53.8	183	53.7	**183**	**53.7**
470.lbm	31.4	438	**31.9**	**430**	32.7	420	31.4	438	**31.9**	**430**	32.7	420
481.wrf	136	82.2	137	81.5	**136**	**82.2**	136	82.2	137	81.5	**136**	**82.2**
482.sphinx3	267	73.0	**267**	**73.0**	266	73.2	267	73.0	**267**	**73.0**	266	73.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Opportunistic Snoop Broadcast
Virtualization Technology disabled
System Profile set to custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
```

Continued on next page

Platform Notes (Continued)

```
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-0171 Wed Feb  1 21:21:55 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2623 v4 @ 2.60GHz
      2 "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 8
      physical 0: cores 0 1 2 3
      physical 1: cores 0 1 2 3
   cache size : 10240 KB

From /proc/meminfo
   MemTotal:       264567484 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux linux-0171 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
   (9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
run-level 3 Feb 1 15:41

SPEC is set to: /root/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  246G   18G  227G   8% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Dell Inc. 2.3.4 11/08/2016
  Memory:
   7x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz, configured at 2133
   MHz
   9x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133
   MHz
   8x Not Specified Not Specified

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/previous-cpu2006-1.2/libs/32:/root/previous-cpu2006-1.2/libs/64:/root/previous-cpu2006-1.2/sh10.2"
OMP_NUM_THREADS = "20"
 The Dell PowerEdge R730 and the PowerEdge R730xd models are electronically equivalent.
 The results have been measured on a Dell PowerEdge R730xd model.
 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`icc   -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-fno-alias` `-auto-ilp32`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-unroll4` `-ansi-alias`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-unroll2` `-inline-level=0 -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 7 16:14:25 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2017.