



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55


Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

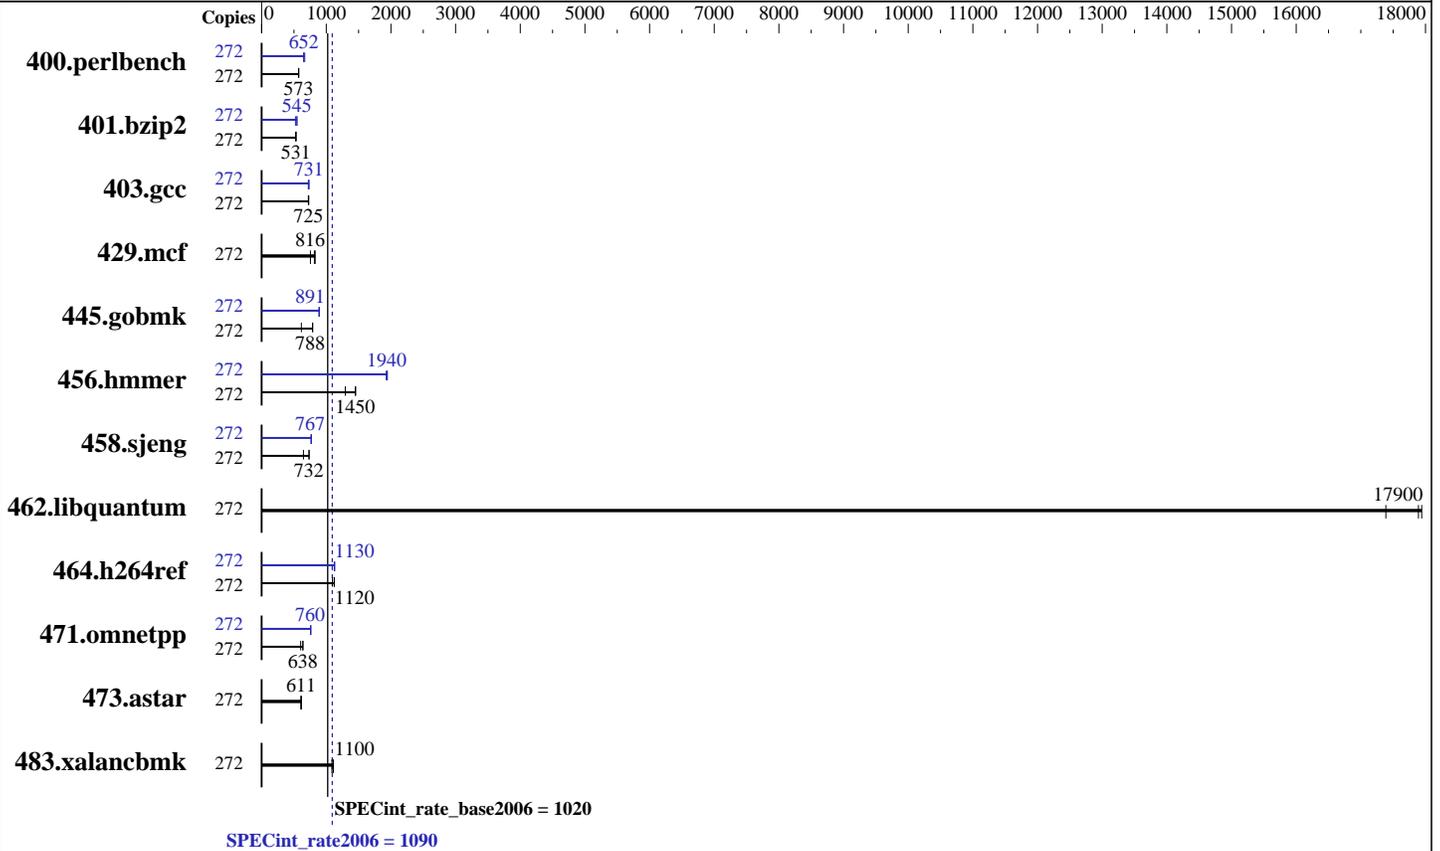

Hardware

CPU Name: Intel Xeon Phi 7250
 CPU Characteristics: Intel Turbo Boost Technology up to 1.60 GHz
 CPU MHz: 1400
 FPU: Integrated
 CPU(s) enabled: 68 cores, 1 chip, 68 cores/chip, 4 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per two cores
 L3 Cache: None
 Other Cache: None
 Memory: 400 GB (6 x 64 GB 2Rx8 PC4-2400T-R + 8 x 2 GB 7200 MHz MCDRAM)
 Disk Subsystem: 1 x 1 TB 7.2K SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.16-56-default
 Compiler: C/C++; Version 16.0.2.181 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	272	4625	575	4641	573	4646	572	272	4078	652	4075	652	3983	667
401.bzip2	272	4968	528	4942	531	4937	532	272	5014	524	4816	545	4796	547
403.gcc	272	3028	723	3021	725	3002	729	272	2989	733	2997	731	3033	722
429.mcf	272	3286	755	3039	816	2995	828	272	3286	755	3039	816	2995	828
445.gobmk	272	3620	788	3612	790	4642	615	272	3202	891	3210	889	3199	892
456.hammer	272	1744	1460	1752	1450	1961	1290	272	1317	1930	1309	1940	1305	1950
458.sjeng	272	4476	735	4496	732	5088	647	272	4293	767	4293	767	4284	768
462.libquantum	272	314	17900	315	17900	324	17400	272	314	17900	315	17900	324	17400
464.h264ref	272	5357	1120	5354	1120	5496	1100	272	5327	1130	5356	1120	5335	1130
471.omnetpp	272	2663	638	2661	639	2812	604	272	2236	760	2235	761	2246	757
473.astar	272	3126	611	3120	612	3123	611	272	3126	611	3120	612	3123	611
483.xalancbmk	272	1727	1090	1689	1110	1701	1100	272	1727	1090	1689	1110	1701	1100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-z6tq Tue Feb 21 17:14:17 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon Phi(TM) CPU 7250 @ 1.40GHz
1 "physical id"s (chips)
272 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 68
siblings : 272
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Platform Notes (Continued)

```

physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
                26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 48 49 50 51 52
                53 54 55 56 57 58 59 60 61 62 63 66 67 68 69 70 71 72 73
cache size : 1024 KB

```

From /proc/meminfo

```

MemTotal:      396134156 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
# release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux linux-z6tq 4.4.16-56-default #1 SMP Mon Aug 8 14:24:26 UTC 2016
(5b281a8) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 21 17:06

SPEC is set to: /root/cpu2006-1.2

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs    930G  563G  365G  61% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.5 001/19/2017

Memory:

```

6x Hynix HMAA8GL7MMR4N-UH 64 GB 4 rank 2400 MHz
8x INTEL N/A 2 GB 7200 MHz

```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with
Intel 2nd Generation Xeon Phi CPU
with 96 GB DDR4 memory using RedHat EL 7.2
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xMIC-AVX512 -ipo -O3 -no-prec-div -opt-prefetch

C++ benchmarks:

-xMIC-AVX512 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -auto-ilp32

401.bzip2: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -opt-prefetch
-auto-ilp32 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

403.gcc: -xMIC-AVX512 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xMIC-AVX512(pass 2) -prof-gen(pass 1)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xMIC-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1090

PowerEdge C6320p (Intel Xeon Phi 7250 1.40 GHz)

SPECint_rate_base2006 = 1020

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 4 16:57:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2017.