SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECint®2006 = 73.8

SPECint_base2006 = 71.6

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Mar-2017
Hardware Availability: Mar-2016
Software Availability: Sep-2016

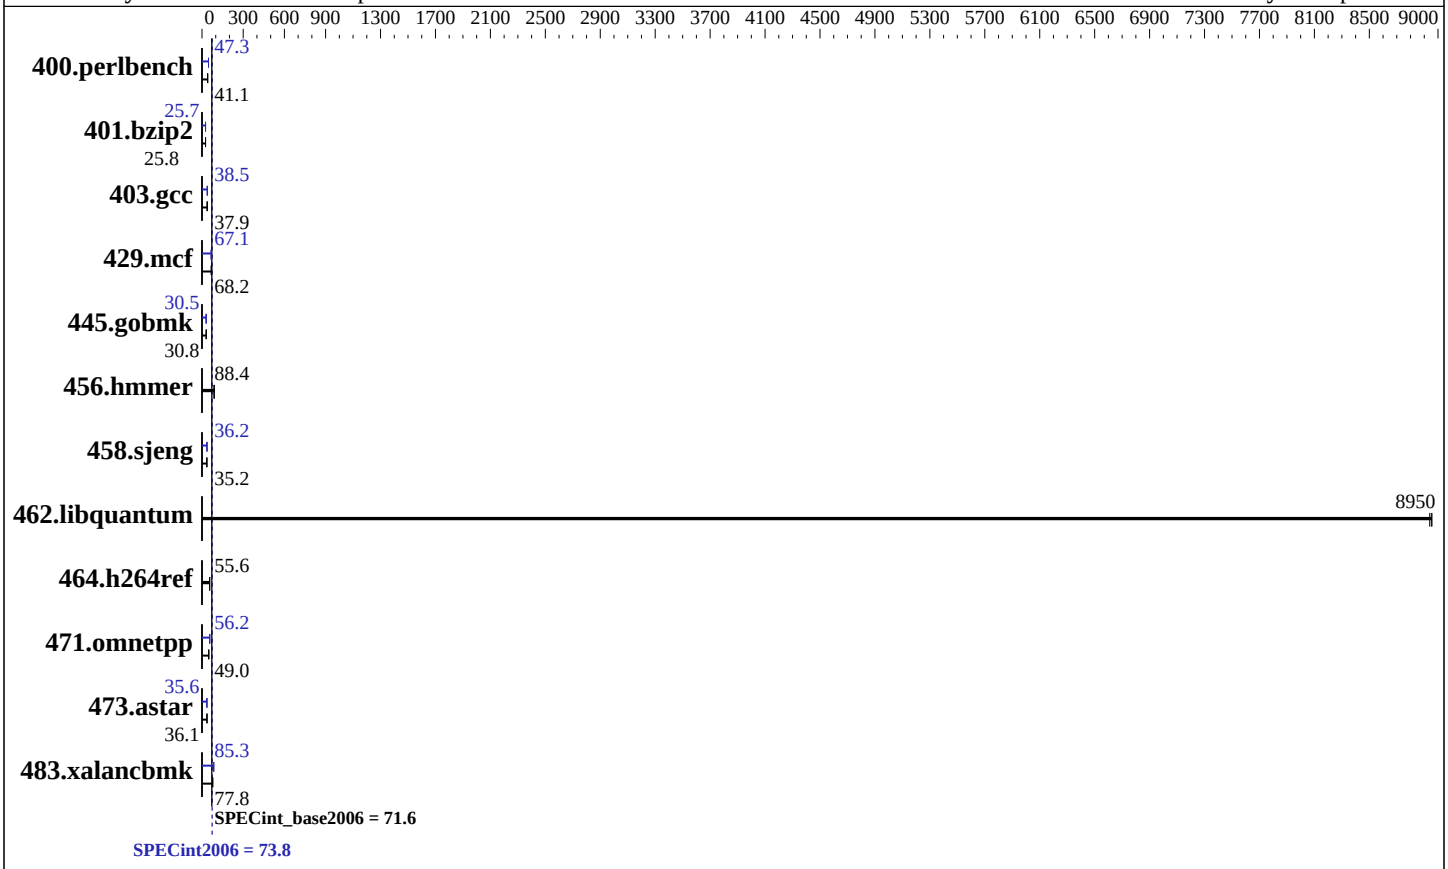

Hardware

CPU Name:	Intel Xeon E5-2697A v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	40 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECint2006 = 73.8

SPECint_base2006 = 71.6

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Mar-2017
Hardware Availability: Mar-2016
Software Availability: Sep-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	236	41.4	**238**	**41.1**	239	40.9	206	47.3	**206**	**47.3**	206	47.3
401.bzip2	**374**	**25.8**	374	25.8	374	25.8	375	25.7	375	25.7	**375**	**25.7**
403.gcc	212	37.9	213	37.9	**213**	**37.9**	**209**	**38.5**	208	38.7	210	38.4
429.mcf	131	69.6	137	66.6	**134**	**68.2**	**136**	**67.1**	135	67.4	136	66.8
445.gobmk	340	30.8	**340**	**30.8**	341	30.8	344	30.5	**344**	**30.5**	344	30.5
456.hmmer	105	88.6	**105**	**88.4**	106	88.4	105	88.6	**105**	**88.4**	106	88.4
458.sjeng	344	35.2	**343**	**35.2**	343	35.3	334	36.2	**334**	**36.2**	334	36.2
462.libquantum	2.31	8960	2.32	8940	**2.31**	**8950**	2.31	8960	2.32	8940	**2.31**	**8950**
464.h264ref	397	55.8	**398**	**55.6**	398	55.6	397	55.8	**398**	**55.6**	398	55.6
471.omnetpp	128	48.9	**128**	**49.0**	127	49.3	111	56.3	**111**	**56.2**	111	56.1
473.astar	195	36.1	**194**	**36.1**	194	36.1	197	35.7	197	35.6	**197**	**35.6**
483.xalancbmk	89.3	77.3	88.1	78.3	**88.7**	**77.8**	81.4	84.7	**80.9**	**85.3**	80.7	85.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
 Operating Mode set to Maximum Performance
 Hyper-Threading set to Disable
 Per Core P-state set ro Disable
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on 123123 Tue Mar 14 16:14:06 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2697A v4 @ 2.60GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 16
         siblings  : 16
         physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
         physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      cache size : 40960 KB

   From /proc/meminfo
      MemTotal:       263828640 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 1
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12-SP1"
         VERSION_ID="12.1"
         PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12:sp1"

   uname -a:
      Linux 123123 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Mar 14 16:02

   SPEC is set to: /home/cpu2006-1.2-ic17.0
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda4      xfs   689G   58G  632G   9% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS LENOVO -[TBE123H-2.10]- 03/25/2016
     Memory:
      8x NO DIMM Unknown
      16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"
OMP_NUM_THREADS = "32"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-qopt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div -auto-ilp32 -qopt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.xml

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECint2006 = 73.8

SPECint_base2006 = 71.6

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Mar-2017
Hardware Availability: Mar-2016
Software Availability: Sep-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 4 16:57:16 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2017.