



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55


Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

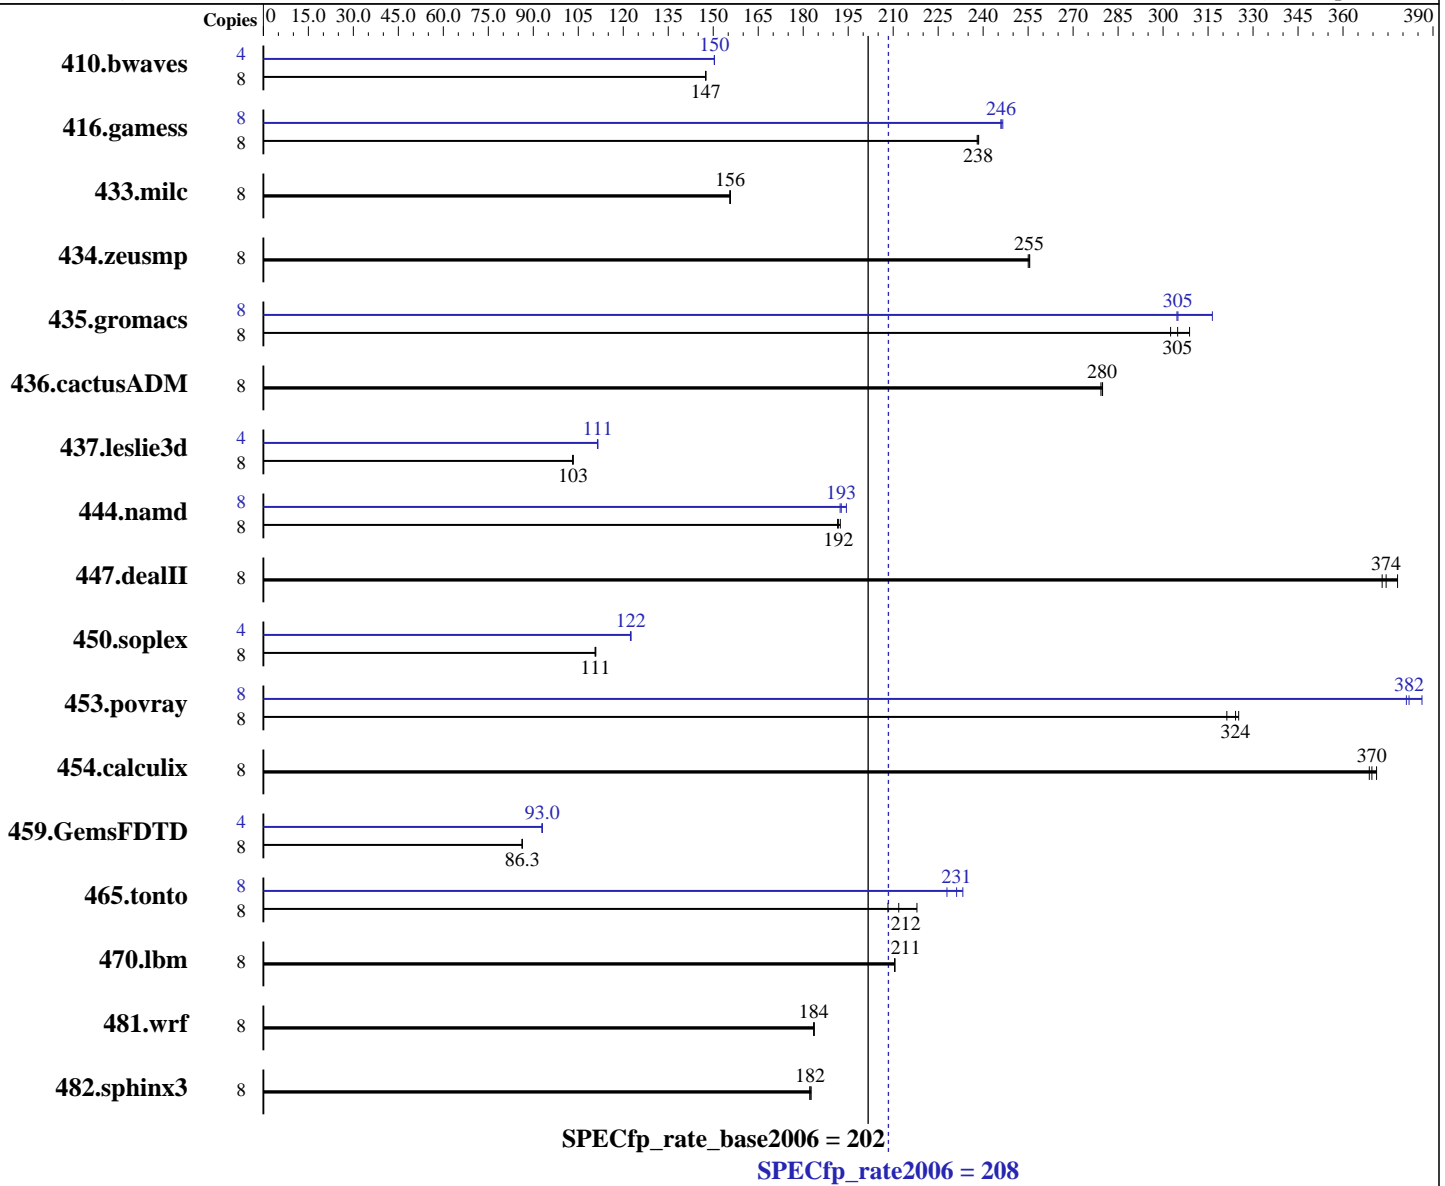

Hardware

CPU Name: Intel Xeon E3-1280 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz
 CPU MHz: 3900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2
 4.10.8-4.geb4ae7d-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran
 Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)
Disk Subsystem: 500 GB SATA 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	737	148	<u>737</u>	<u>147</u>	737	147	4	361	150	362	150	<u>361</u>	<u>150</u>
416.gamess	8	657	239	658	238	<u>657</u>	<u>238</u>	8	637	246	<u>637</u>	<u>246</u>	635	247
433.milc	8	471	156	<u>472</u>	<u>156</u>	472	156	8	471	156	<u>472</u>	<u>156</u>	472	156
434.zeusmp	8	<u>285</u>	<u>255</u>	285	256	285	255	8	<u>285</u>	<u>255</u>	285	256	285	255
435.gromacs	8	<u>187</u>	<u>305</u>	185	309	189	303	8	181	316	188	305	<u>187</u>	<u>305</u>
436.cactusADM	8	<u>342</u>	<u>280</u>	342	280	342	279	8	<u>342</u>	<u>280</u>	342	280	342	279
437.leslie3d	8	728	103	<u>728</u>	<u>103</u>	729	103	4	337	112	<u>337</u>	<u>111</u>	338	111
444.namd	8	<u>335</u>	<u>192</u>	334	192	335	191	8	330	194	<u>333</u>	<u>193</u>	334	192
447.dealII	8	242	378	<u>244</u>	<u>374</u>	245	373	8	242	378	<u>244</u>	<u>374</u>	245	373
450.soplex	8	602	111	603	111	<u>603</u>	<u>111</u>	4	273	122	<u>272</u>	<u>122</u>	272	123
453.povray	8	131	325	132	321	<u>131</u>	<u>324</u>	8	<u>111</u>	<u>382</u>	110	386	112	381
454.calculix	8	178	371	<u>179</u>	<u>370</u>	179	369	8	178	371	<u>179</u>	<u>370</u>	179	369
459.GemsFDTD	8	983	86.3	<u>984</u>	<u>86.3</u>	984	86.3	4	457	92.9	<u>457</u>	<u>93.0</u>	456	93.0
465.tonto	8	378	208	<u>372</u>	<u>212</u>	361	218	8	345	228	<u>341</u>	<u>231</u>	338	233
470.lbm	8	522	211	<u>522</u>	<u>211</u>	522	210	8	522	211	<u>522</u>	<u>211</u>	522	210
481.wrf	8	486	184	487	184	<u>487</u>	<u>184</u>	8	486	184	487	184	<u>487</u>	<u>184</u>
482.sphinx3	8	854	183	856	182	<u>855</u>	<u>182</u>	8	854	183	856	182	<u>855</u>	<u>182</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
System Profile set to Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

Platform Notes (Continued)

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-rlzd Fri Apr 14 10:10:01 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 6144 KB
```

```
From /proc/meminfo
MemTotal:      65934740 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-rlzd 4.10.8-4.geb4ae7d-default #1 SMP PREEMPT Tue Apr 4 10:46:31
UTC 2017 (eb4ae7d) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 14 02:12
```

SPEC is set to: /root/cpu2006-1.2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	458G	13G	446G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.1.3 04/07/2017

Memory:

4x 002C0000002C 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-malloc-options=3
 -qopt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

PowerEdge R330 (Intel Xeon E3-1280 v6, 3.90 GHz)

SPECfp_rate_base2006 = 202

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 2 14:05:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 May 2017.