SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110i-1 (Intel Xeon E3-1240L v5)

SPECint®_rate2006 = 217

SPECint_rate_base2006 = 208

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2017
Hardware Availability: Apr-2017
Software Availability: Jan-2017

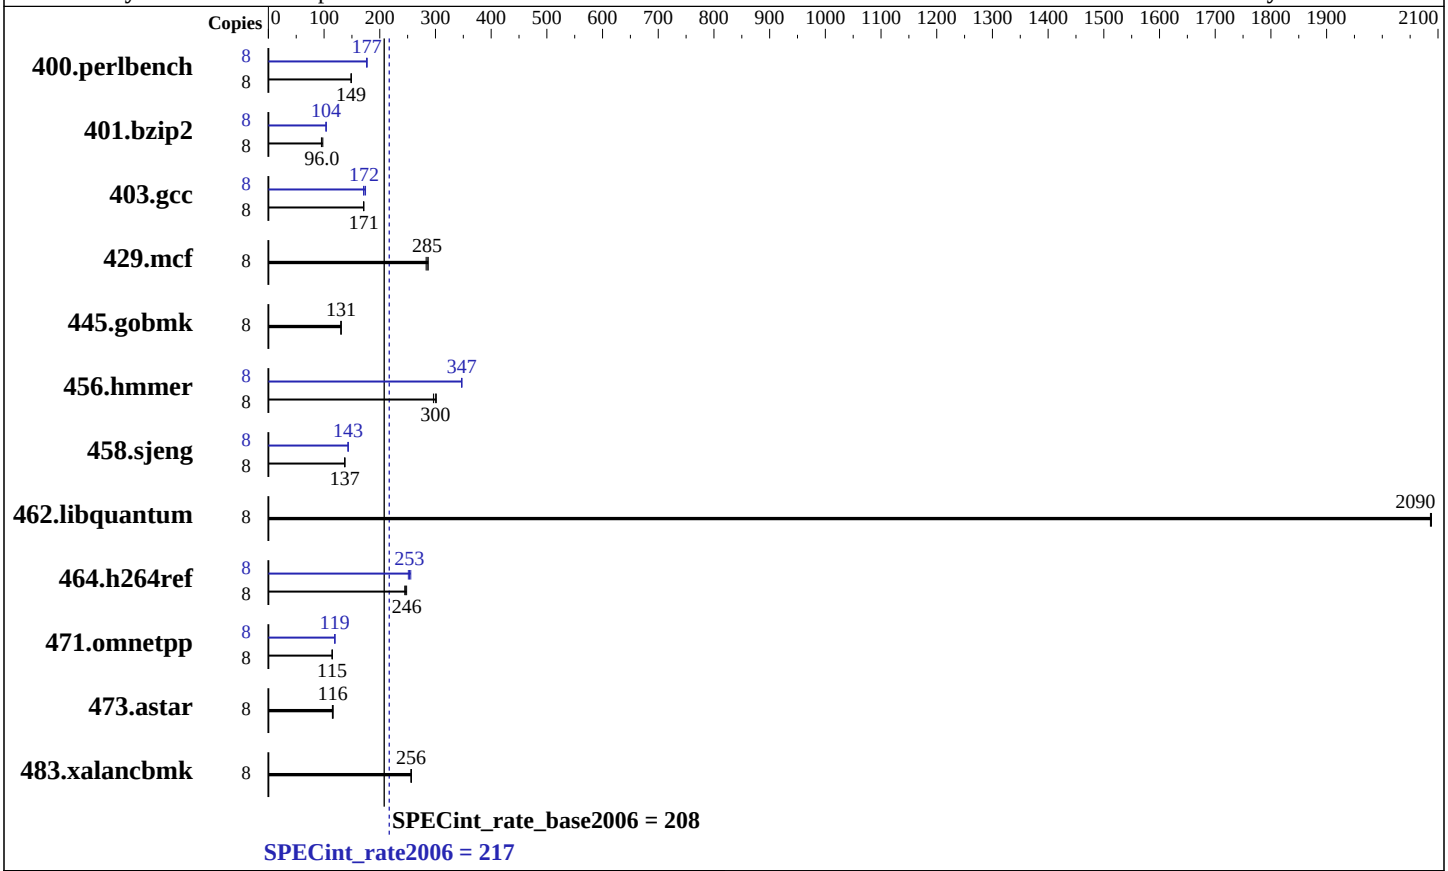

Hardware

CPU Name:	Intel Xeon E3-1240L v5
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (2 x 16 GB 2Rx8 PC4-2400T-E, running at 2133 MHz)
Disk Subsystem:	1 x 1 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) Kernel 3.10.0-514.6.1.el7.x86_64
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110i-1 (Intel Xeon E3-1240L v5)

SPECint_rate2006 = 217

SPECint_rate_base2006 = 208

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2017
Hardware Availability: Apr-2017
Software Availability: Jan-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	526	149	525	149	**525**	**149**	8	443	176	**441**	**177**	441	177
401.bzip2	8	811	95.2	**804**	**96.0**	789	97.8	8	745	104	744	104	**745**	**104**
403.gcc	8	**376**	**171**	377	171	376	171	8	369	174	377	171	**375**	**172**
429.mcf	8	258	283	254	287	**256**	**285**	8	258	283	254	287	**256**	**285**
445.gobmk	8	642	131	645	130	**643**	**131**	8	642	131	645	130	**643**	**131**
456.hmmer	8	**249**	**300**	248	302	252	296	8	215	347	215	347	**215**	**347**
458.sjeng	8	707	137	704	137	**706**	**137**	8	675	143	677	143	**676**	**143**
462.libquantum	8	79.4	2090	79.4	2090	**79.4**	**2090**	8	79.4	2090	79.4	2090	**79.4**	**2090**
464.h264ref	8	723	245	**718**	**246**	713	248	8	**699**	**253**	692	256	705	251
471.omnetpp	8	436	115	**436**	**115**	437	114	8	420	119	418	120	**419**	**119**
473.astar	8	489	115	483	116	**486**	**116**	8	489	115	483	116	**486**	**116**
483.xalancbmk	8	215	257	**215**	**256**	215	256	8	215	257	**215**	**256**	215	256

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
 DCU Streamer Prefetcher: Disabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto-ilp32 -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-ra-region-strategy=block -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 30 15:31:40 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 May 2017.