



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2016

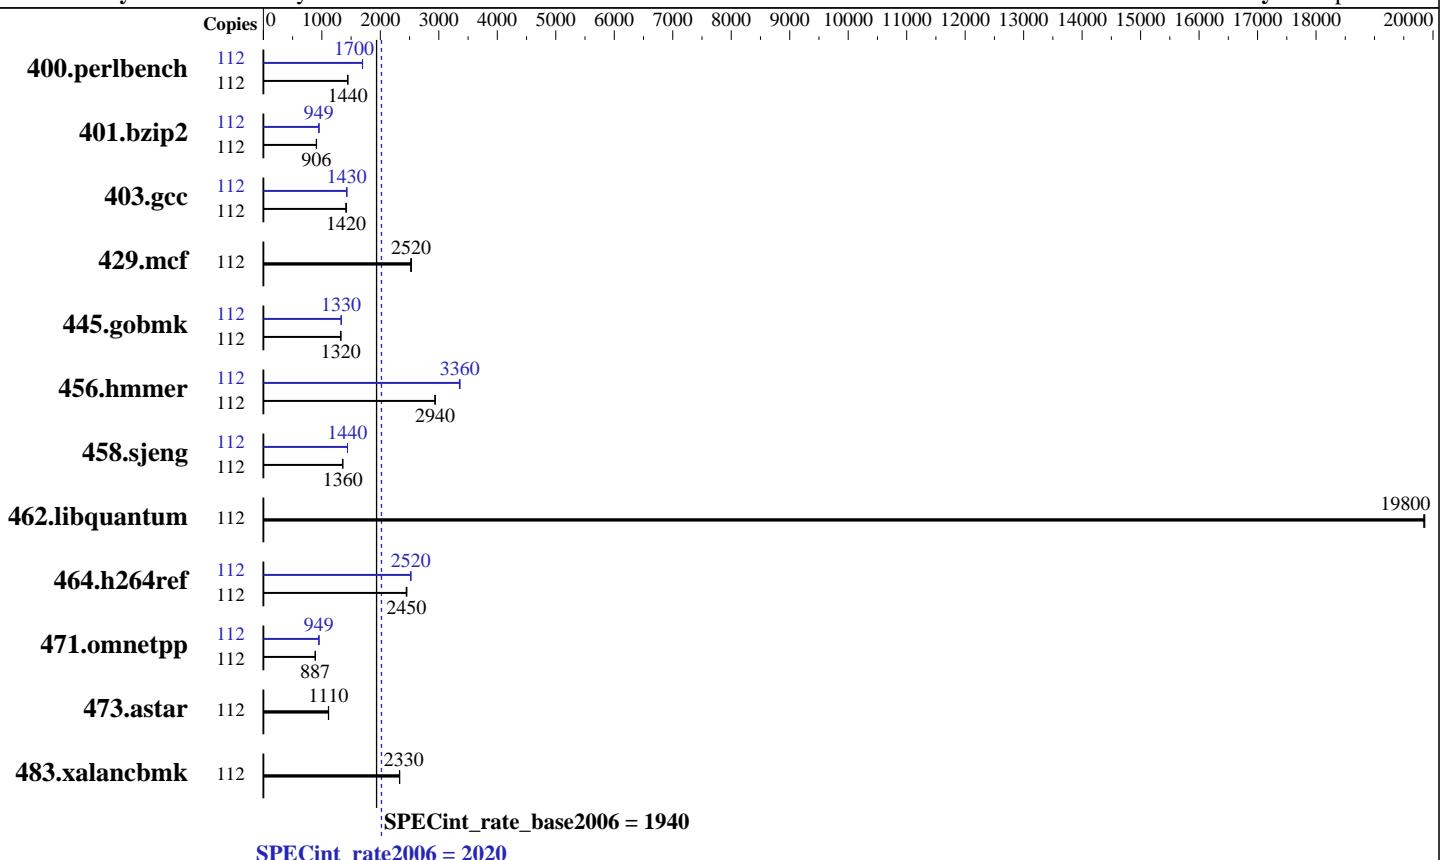

### Hardware

CPU Name:	Intel Xeon E7-4830 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	56 cores, 4 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	35 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (32 x 32 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem:	1 x 400 GB SAS SSD
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019

**Test date:** May-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	112	759	1440	758	1440	<b>758</b>	<b>1440</b>	112	<b>645</b>	<b>1700</b>	646	1690	<b>645</b>	<b>1700</b>
401.bzip2	112	<b>1192</b>	<b>906</b>	1193	906	1188	909	112	1137	950	1139	949	<b>1138</b>	<b>949</b>
403.gcc	112	<b>636</b>	<b>1420</b>	639	1410	635	1420	112	634	1420	<b>632</b>	<b>1430</b>	631	1430
429.mcf	112	405	2520	<b>405</b>	<b>2520</b>	404	2530	112	405	2520	<b>405</b>	<b>2520</b>	404	2530
445.gobmk	112	888	1320	887	1320	<b>888</b>	<b>1320</b>	112	<b>883</b>	<b>1330</b>	883	1330	882	1330
456.hammer	112	355	2940	<b>356</b>	<b>2940</b>	356	2930	112	311	3360	312	3350	<b>311</b>	<b>3360</b>
458.sjeng	112	998	1360	<b>999</b>	<b>1360</b>	999	1360	112	942	1440	<b>942</b>	<b>1440</b>	942	1440
462.libquantum	112	<b>117</b>	<b>19800</b>	117	19900	117	19800	112	<b>117</b>	<b>19800</b>	117	19900	117	19800
464.h264ref	112	1015	2440	1010	2450	<b>1013</b>	<b>2450</b>	112	983	2520	984	2520	<b>983</b>	<b>2520</b>
471.omnetpp	112	789	887	788	888	<b>789</b>	<b>887</b>	112	<b>737</b>	<b>949</b>	736	951	738	948
473.astar	112	<b>706</b>	<b>1110</b>	705	1120	707	1110	112	<b>706</b>	<b>1110</b>	705	1120	707	1110
483.xalancbmk	112	<b>332</b>	<b>2330</b>	332	2330	332	2330	112	<b>332</b>	<b>2330</b>	332	2330	332	2330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

CPU performance set to Enterprise  
Power Technology set to Energy Efficient  
Energy Performance set to Balanced Performance  
Memory RAS configuration set to Maximum Performance  
Memory Power Saving Mode set to Disabled  
QPI Snoop Mode set to Cluster-on-Die  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-3y2r Fri May 5 16:12:01 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4830 v4 @ 2.00GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019

**Test date:** May-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
4 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      1058502812 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-3y2r 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 1 06:09
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   373G   23G  350G   7% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. EXM4.3.1.2c.0.080220161434 08/02/2016  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2016

## Platform Notes (Continued)

### Memory:

32x 0xCE00 M393A4K40BB0-CPB 32 GB 2 rank 2133 MHz, configured at 1333 MHz  
64x NO DIMM NO DIMM 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2016

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2016

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
                   -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
                   -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
                   -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -unroll4 -auto-ilp32  
                   -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2)  
                   -qopt-ra-region-strategy=block  
                   -qopt-mem-layout-trans=3 -Wl,-z,muldefs  
                   -L/sh10.2 -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECint\_rate2006 = 2020**

**SPECint\_rate\_base2006 = 1940**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:32:06 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 May 2017.