SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i (Intel Celeron G3930)

SPECfp®2006 = 63.8

SPECfp_base2006 = 63.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2017
Hardware Availability: Apr-2017
Software Availability: Jan-2017

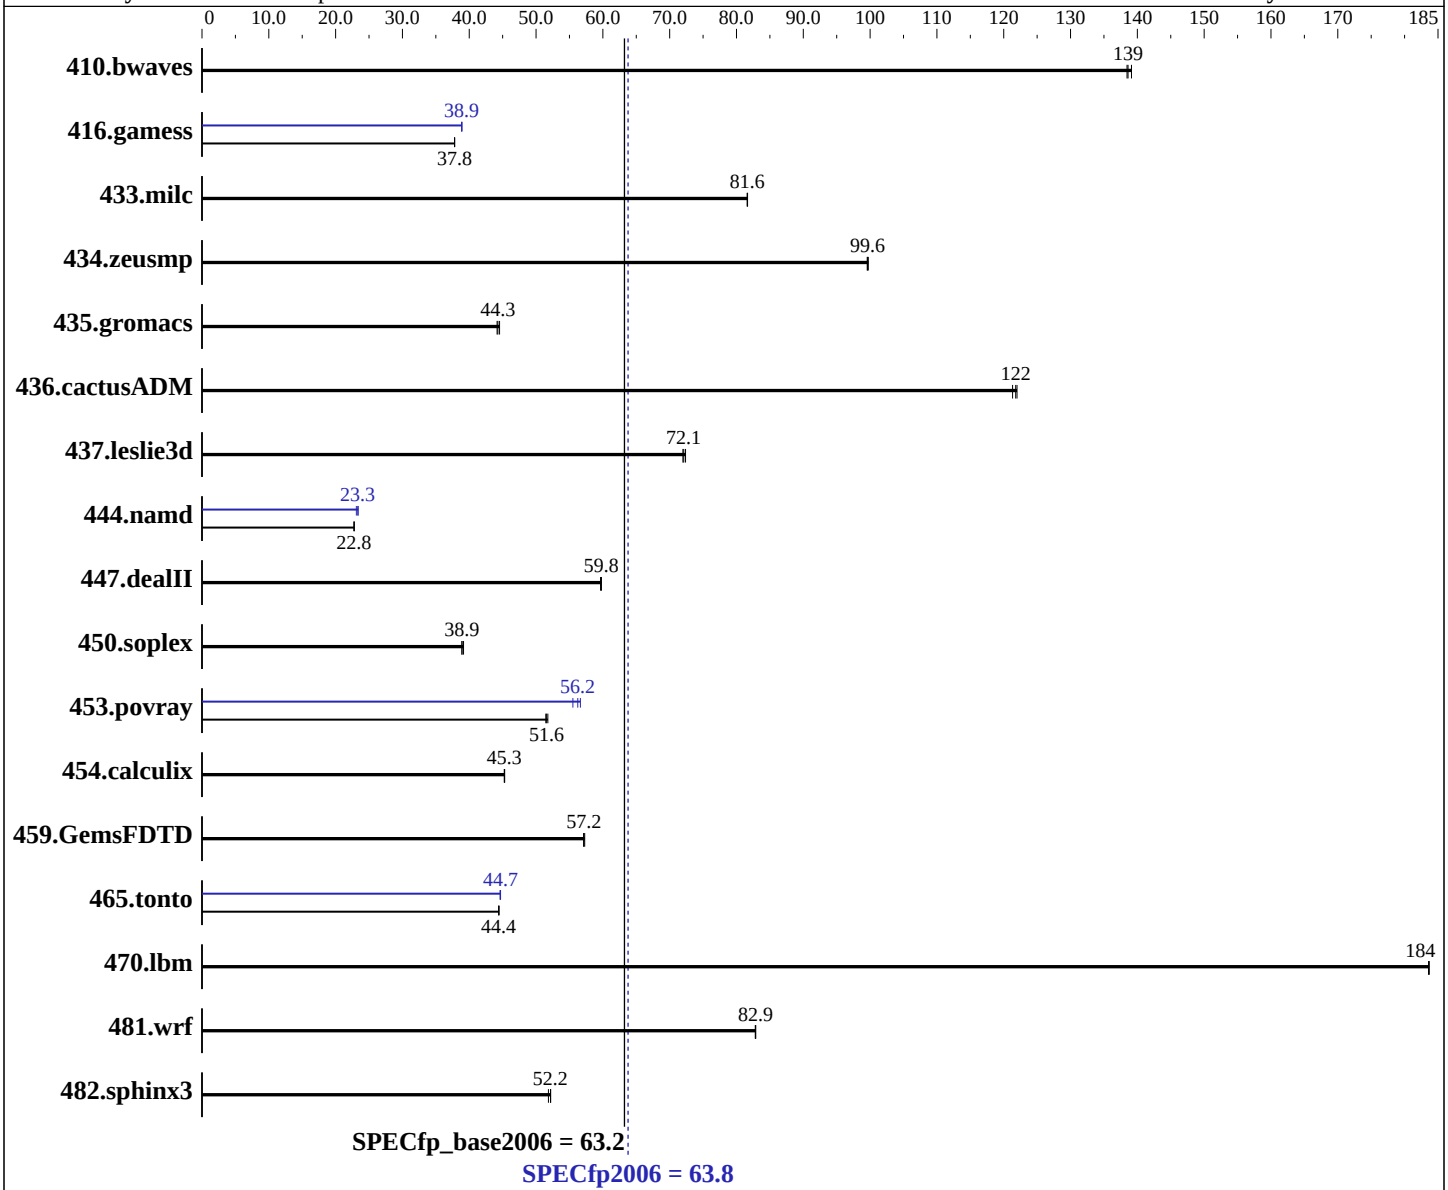

Hardware

CPU Name:	Intel Celeron G3930
CPU Characteristics:	
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) Kernel 3.10.0-514.6.1.el7.x86_64
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i (Intel Celeron G3930)

SPECfp2006 = 63.8

SPECfp_base2006 = 63.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2017
Hardware Availability: Apr-2017
Software Availability: Jan-2017

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E, running at 2133 MHz)
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**98.0**	**139**	97.7	139	98.2	138	**98.0**	**139**	97.7	139	98.2	138
416.gamess	**518**	**37.8**	518	37.8	518	37.8	**504**	**38.9**	503	38.9	504	38.9
433.milc	**112**	**81.6**	112	81.7	112	81.6	**112**	**81.6**	112	81.7	112	81.6
434.zeusmp	**91.3**	**99.6**	91.2	99.7	91.4	99.6	**91.3**	**99.6**	91.2	99.7	91.4	99.6
435.gromacs	**161**	**44.3**	160	44.5	162	44.2	**161**	**44.3**	160	44.5	162	44.2
436.cactusADM	98.0	122	**98.1**	**122**	98.5	121	98.0	122	**98.1**	**122**	98.5	121
437.leslie3d	130	72.4	131	72.0	**130**	**72.1**	130	72.4	131	72.0	**130**	**72.1**
444.namd	352	22.8	352	22.8	**352**	**22.8**	343	23.4	**344**	**23.3**	347	23.1
447.dealII	**191**	**59.8**	191	59.8	192	59.7	**191**	**59.8**	191	59.8	192	59.7
450.soplex	213	39.1	**214**	**38.9**	214	38.9	213	39.1	**214**	**38.9**	214	38.9
453.povray	103	51.8	**103**	**51.6**	103	51.5	93.9	56.6	**94.6**	**56.2**	95.8	55.5
454.calculix	182	45.3	**182**	**45.3**	182	45.2	182	45.3	**182**	**45.3**	182	45.2
459.GemsFDTD	186	57.1	185	57.3	**186**	**57.2**	186	57.1	185	57.3	**186**	**57.2**
465.tonto	221	44.5	**222**	**44.4**	222	44.4	221	44.6	220	44.7	**220**	**44.7**
470.lbm	74.8	184	**74.8**	**184**	74.8	184	74.8	184	**74.8**	**184**	74.8	184
481.wrf	**135**	**82.9**	135	82.8	135	82.9	**135**	**82.9**	135	82.8	135	82.9
482.sphinx3	373	52.2	376	51.9	**374**	**52.2**	373	52.2	376	51.9	**374**	**52.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"
OMP_NUM_THREADS = "2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default.
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 14 10:46:06 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 June 2017.