SPEC® CFP2006 Result

Dell Inc.

PowerEdge R740 (Intel Xeon Platinum 8176 2.10 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1660

CPU2006 license:	55	**Test date:**	Jul-2017
Test sponsor:	Dell Inc.	**Hardware Availability:**	Jul-2017
Tested by:	Dell Inc.	**Software Availability:**	Nov-2016

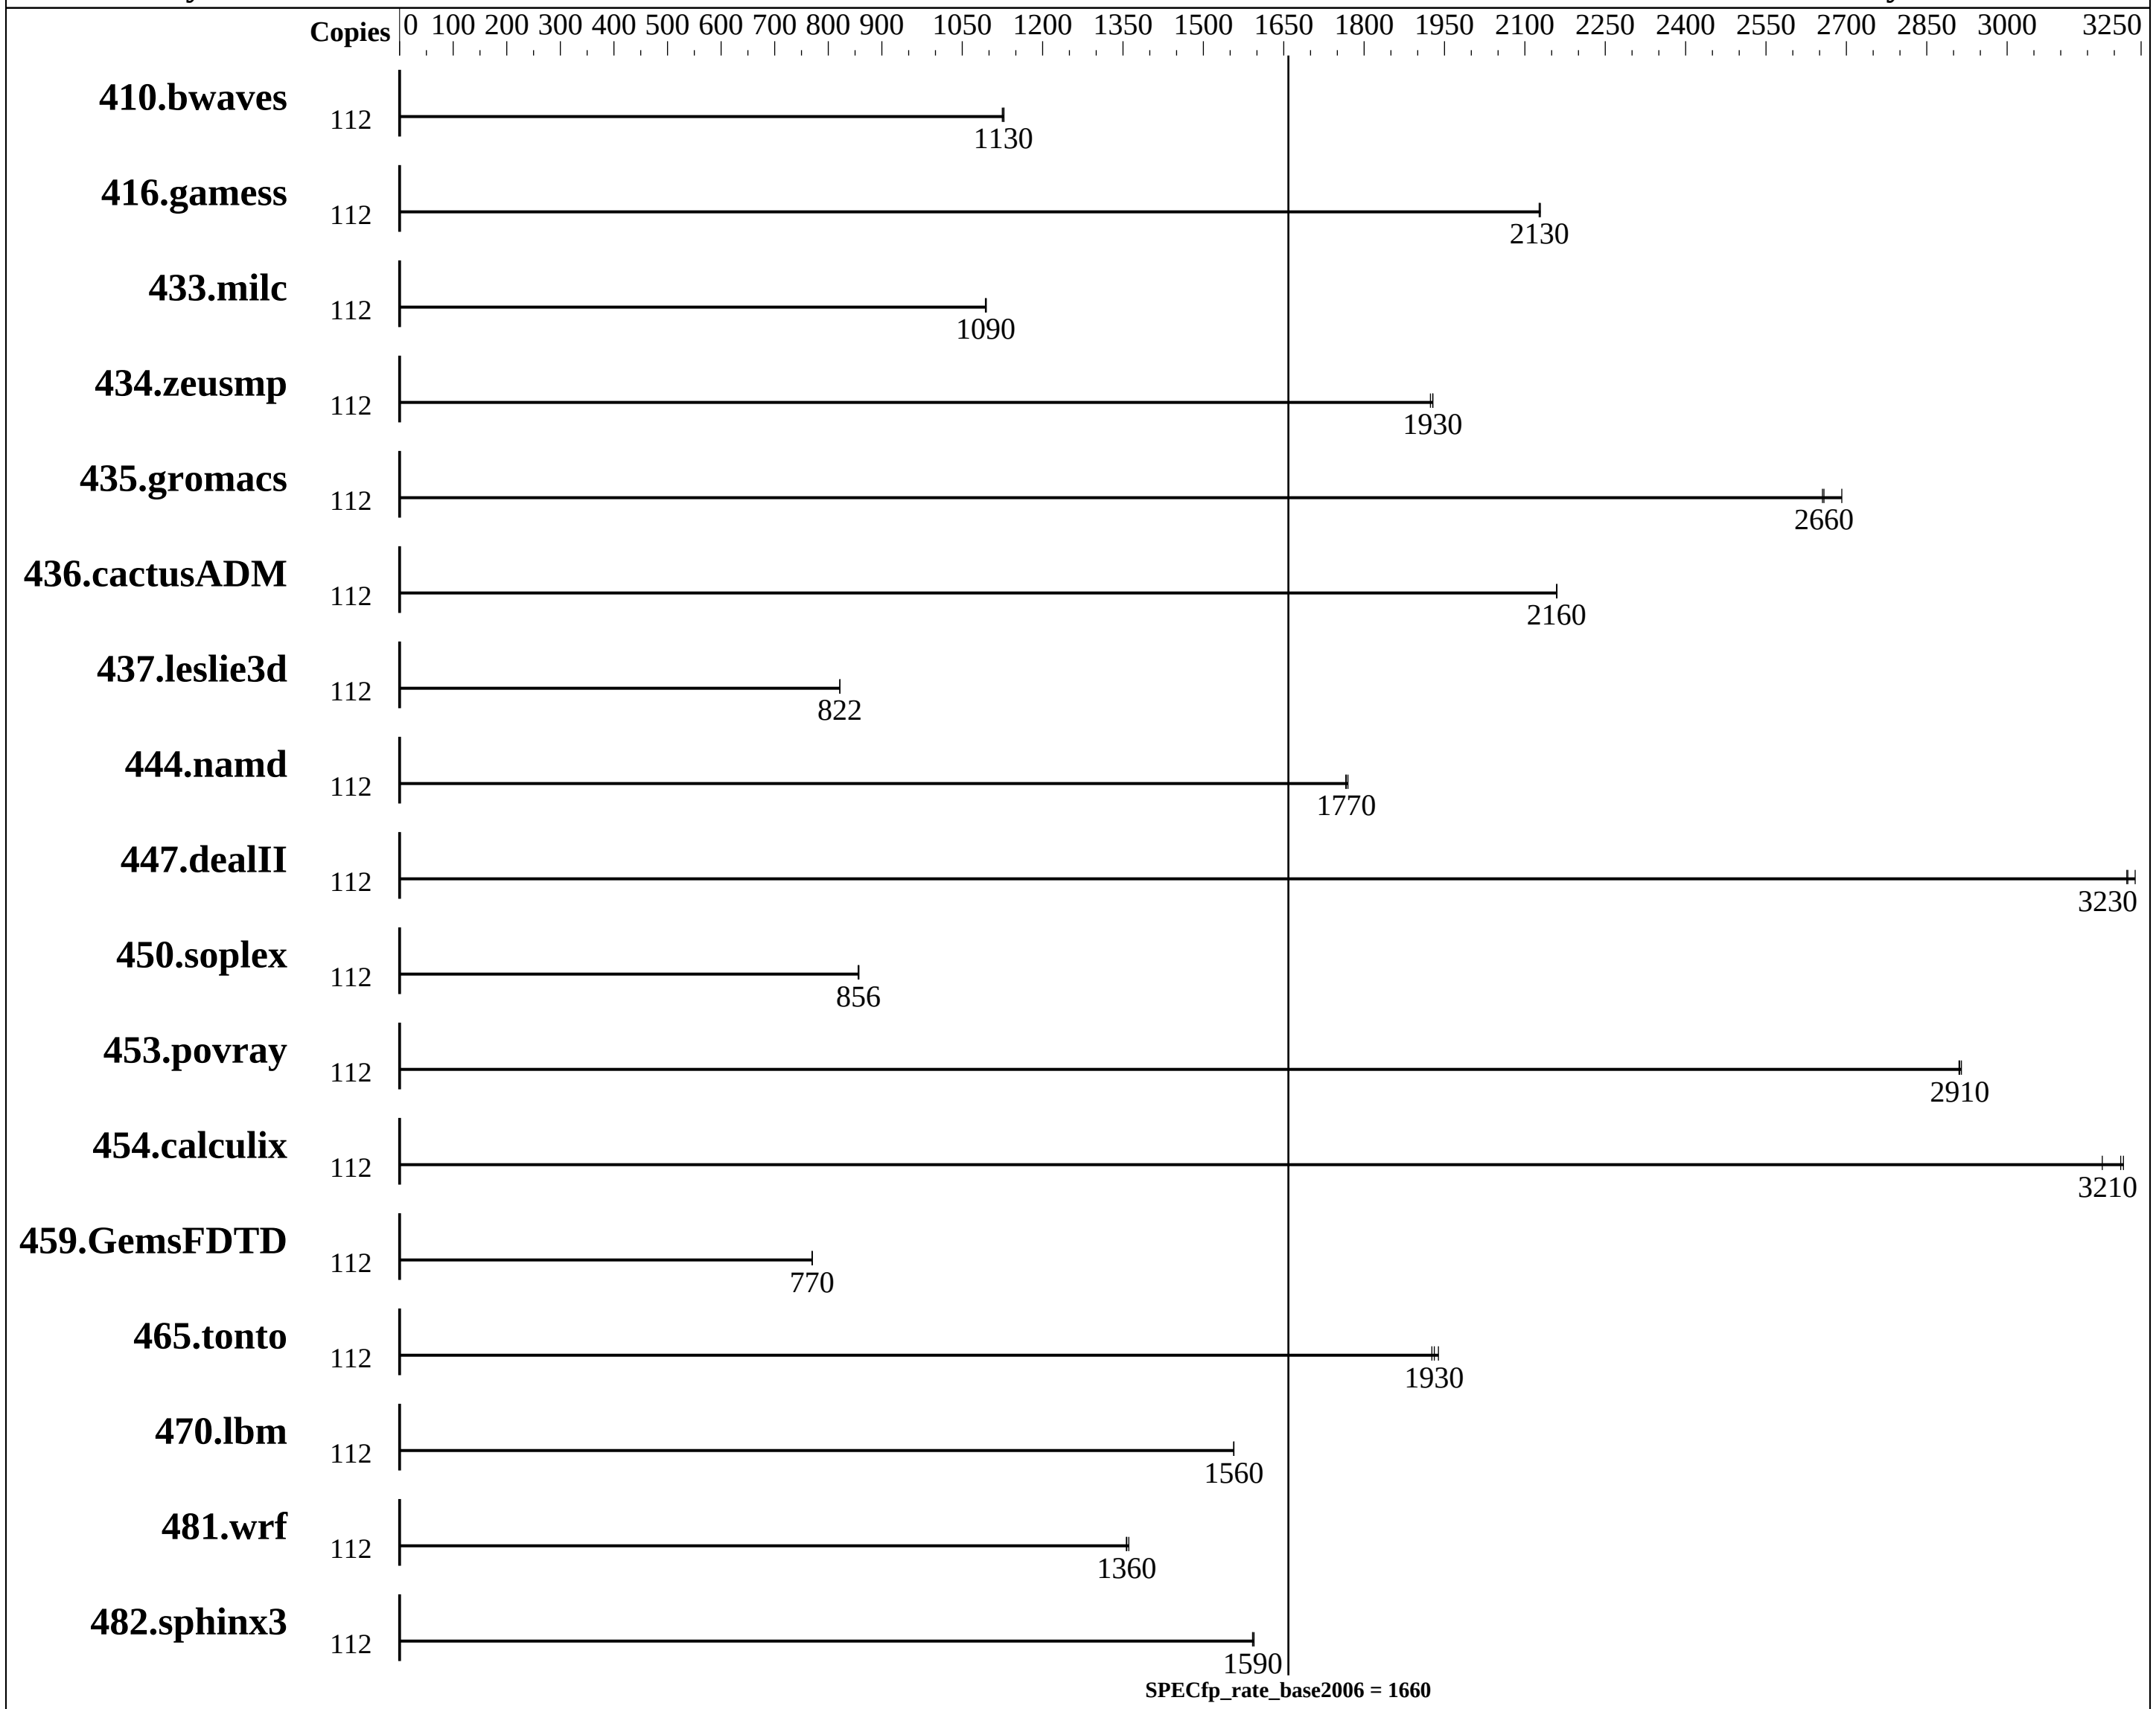

Hardware

CPU Name:	Intel Xeon Platinum 8176
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	56 cores, 2 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Dell Inc.

PowerEdge R740 (Intel Xeon Platinum 8176 2.10 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1660

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2016

L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	1353	1120	**1351**	**1130**	1349	1130							
416.gamess	112	1031	2130	1030	2130	**1031**	**2130**							
433.milc	112	940	1090	939	1090	**940**	**1090**							
434.zeusmp	112	529	1930	530	1920	**529**	**1930**							
435.gromacs	112	**301**	**2660**	297	2690	301	2660							
436.cactusADM	112	**620**	**2160**	620	2160	620	2160							
437.leslie3d	112	**1281**	**822**	1281	822	1281	822							
444.namd	112	**508**	**1770**	509	1770	508	1770							
447.dealII	112	396	3240	**397**	**3230**	398	3220							
450.soplex	112	**1091**	**856**	1091	856	1090	857							
453.povray	112	**205**	**2910**	205	2910	204	2910							
454.calculix	112	287	3220	**288**	**3210**	291	3180							
459.GemsFDTD	112	**1544**	**770**	1543	770	1544	770							
465.tonto	112	**571**	**1930**	568	1940	572	1930							
470.lbm	112	989	1560	**988**	**1560**	988	1560							
481.wrf	112	919	1360	922	1360	**922**	**1360**							
482.sphinx3	112	1369	1590	1371	1590	**1371**	**1590**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled
```

Continued on next page

Platform Notes (Continued)

```
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2006-1.2_ic17u3/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-bgfp Mon Jul  3 23:09:57 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
      2 "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
   cache size : 39424 KB

From /proc/meminfo
   MemTotal:       394732004 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
```

Continued on next page

Platform Notes (Continued)

```
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-bgfp 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
    (9464f67) x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jul 3 11:22

 SPEC is set to: /home/cpu2006-1.2_ic17u3
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   405G  8.9G  396G   3% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Dell Inc. 1.0.5 06/19/2017
   Memory:
    24x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2_ic17u3/lib/ia32:/home/cpu2006-1.2_ic17u3/lib/intel64:/home/cpu2006-1.2_ic17u3/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
    icc -m64

C++ benchmarks:
    icpc -m64

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves:	-DSPEC_CPU_LP64
416.gamess:	-DSPEC_CPU_LP64
433.milc:	-DSPEC_CPU_LP64
434.zeusmp:	-DSPEC_CPU_LP64
435.gromacs:	-DSPEC_CPU_LP64 -nofor_main
436.cactusADM:	-DSPEC_CPU_LP64 -nofor_main
437.leslie3d:	-DSPEC_CPU_LP64
444.namd:	-DSPEC_CPU_LP64
447.dealII:	-DSPEC_CPU_LP64
450.soplex:	-DSPEC_CPU_LP64
453.povray:	-DSPEC_CPU_LP64
454.calculix:	-DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD:	-DSPEC_CPU_LP64
465.tonto:	-DSPEC_CPU_LP64
470.lbm:	-DSPEC_CPU_LP64
481.wrf:	-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3:	-DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`
`-qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`
`-qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`
`-qopt-mem-layout-trans=3`

Dell Inc.

PowerEdge R740 (Intel Xeon Platinum 8176 2.10 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1660

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2016

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 25 15:53:18 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 July 2017.