SPEC® CFP2006 Result

Supermicro

SuperServer SYS-2049U-TR4
(X11QPH+, Intel Xeon Platinum 8180)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 3470

CPU2006 license:	001176	**Test date:**	Jul-2017
Test sponsor:	Supermicro	**Hardware Availability:**	Jul-2017
Tested by:	Supermicro	**Software Availability:**	Apr-2017

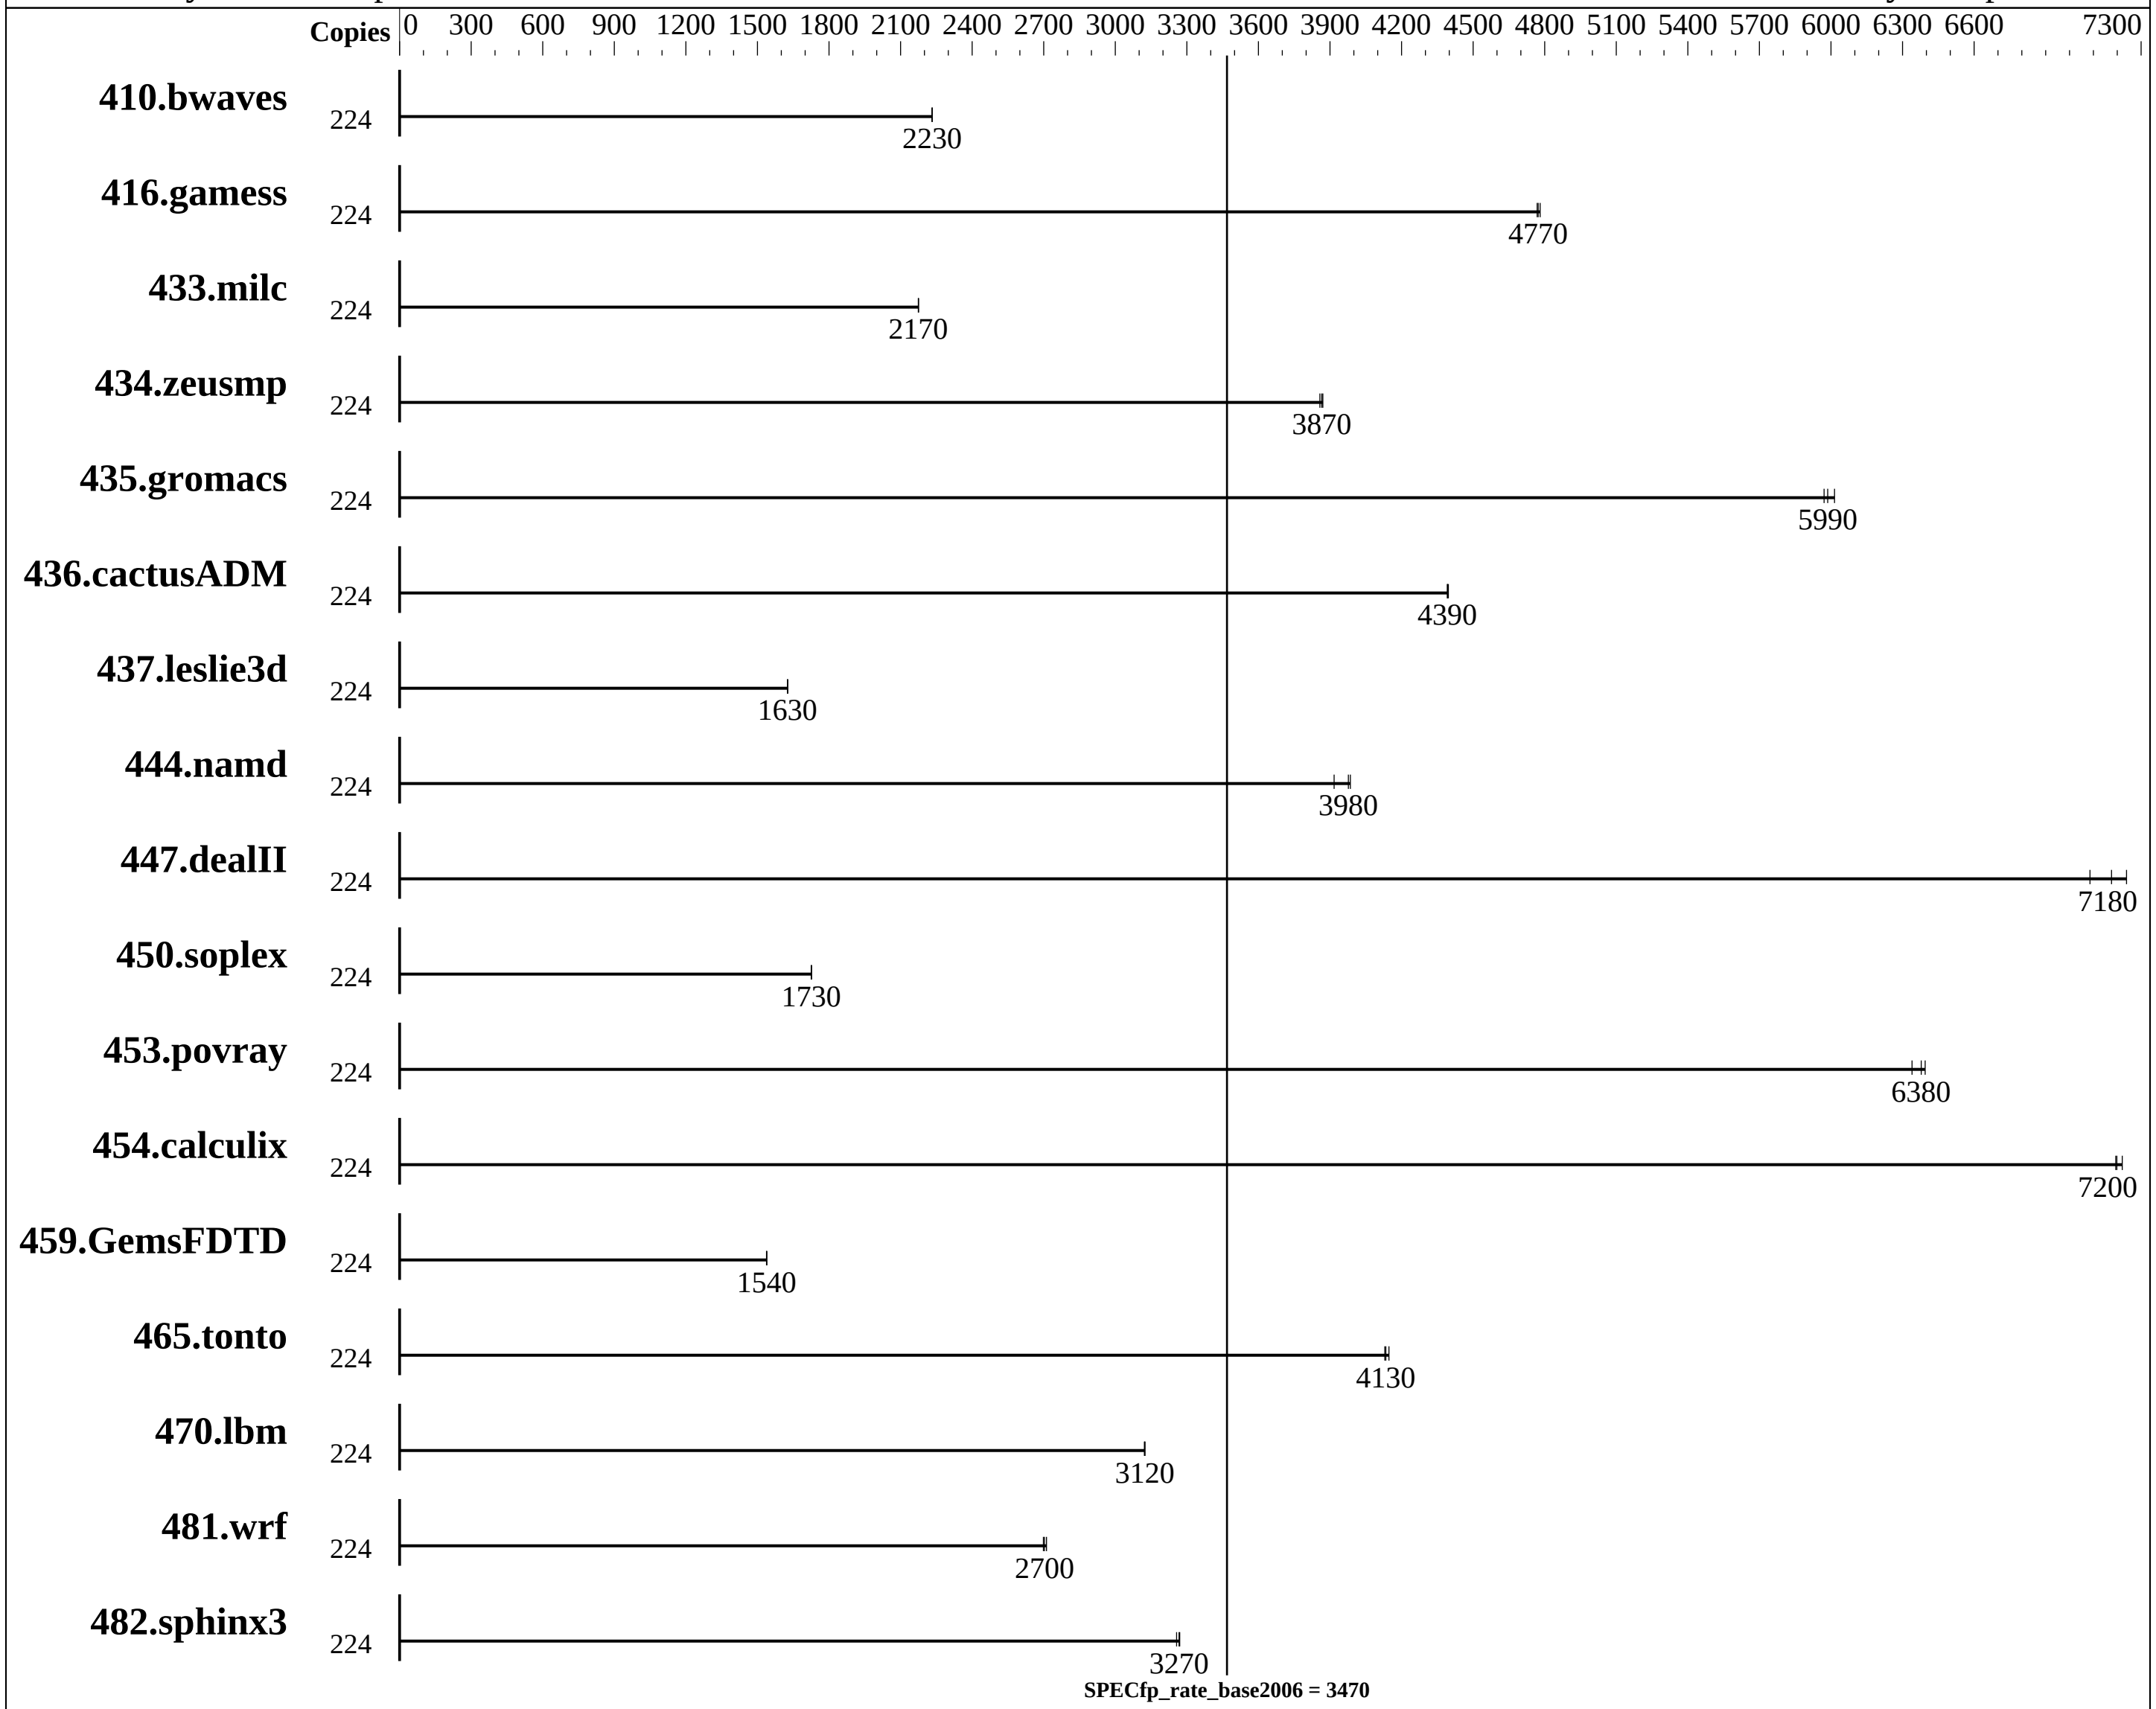

Hardware

CPU Name:	Intel Xeon Platinum 8180
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	112 cores, 4 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Supermicro

SuperServer SYS-2049U-TR4
(X11QPH+, Intel Xeon Platinum 8180)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 3470

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jul-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 3.2 TB SAS3 (RAID0, 2 x 1.8TB SAS3, 10K RPM)
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: No

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	224	1364	2230	**1364**	**2230**	1364	2230							
416.gamess	224	**919**	**4770**	917	4780	920	4770							
433.milc	224	**946**	**2170**	946	2170	945	2180							
434.zeusmp	224	528	3860	**527**	**3870**	527	3870							
435.gromacs	224	266	6010	**267**	**5990**	268	5970							
436.cactusADM	224	609	4390	609	4400	**609**	**4390**							
437.leslie3d	224	1294	1630	**1295**	**1630**	1295	1630							
444.namd	224	459	3920	**452**	**3980**	451	3990							
447.dealII	224	354	7240	362	7090	**357**	**7180**							
450.soplex	224	1083	1730	**1082**	**1730**	1082	1730							
453.povray	224	**187**	**6380**	186	6390	188	6340							
454.calculix	224	256	7220	**257**	**7200**	257	7190							
459.GemsFDTD	224	**1545**	**1540**	1544	1540	1545	1540							
465.tonto	224	**533**	**4130**	534	4130	531	4150							
470.lbm	224	986	3120	**985**	**3120**	985	3120							
481.wrf	224	923	2710	**926**	**2700**	927	2700							
482.sphinx3	224	**1336**	**3270**	1340	3260	1335	3270							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Hardware P-states = Disable
Intel Virtualization Technology = Disable
```

Continued on next page

Platform Notes (Continued)

```
SNC = Enable
IMC Interleaving = 1Way Interleave
LLC dead line alloc = Disable
Stale AtoS = Enable
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-kepk Sun Jul  9 18:17:12 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
       4 "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
    cache size : 39424 KB

 From /proc/meminfo
    MemTotal:       1583923692 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

Continued on next page

Platform Notes (Continued)

```
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-kepk 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
    (9464f67) x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jul 8 18:57

 SPEC is set to: /home/cpu2006
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      ext4  3.2T  428G  2.8T  14% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. 0.9 06/22/2017
   Memory:
    48x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-SKL-revA.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-SKL-revA.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Sep 1 11:38:59 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2017.