



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6146  
3.20GHz)

**SPECfp®2006 = 158**

**SPECfp\_base2006 = 152**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

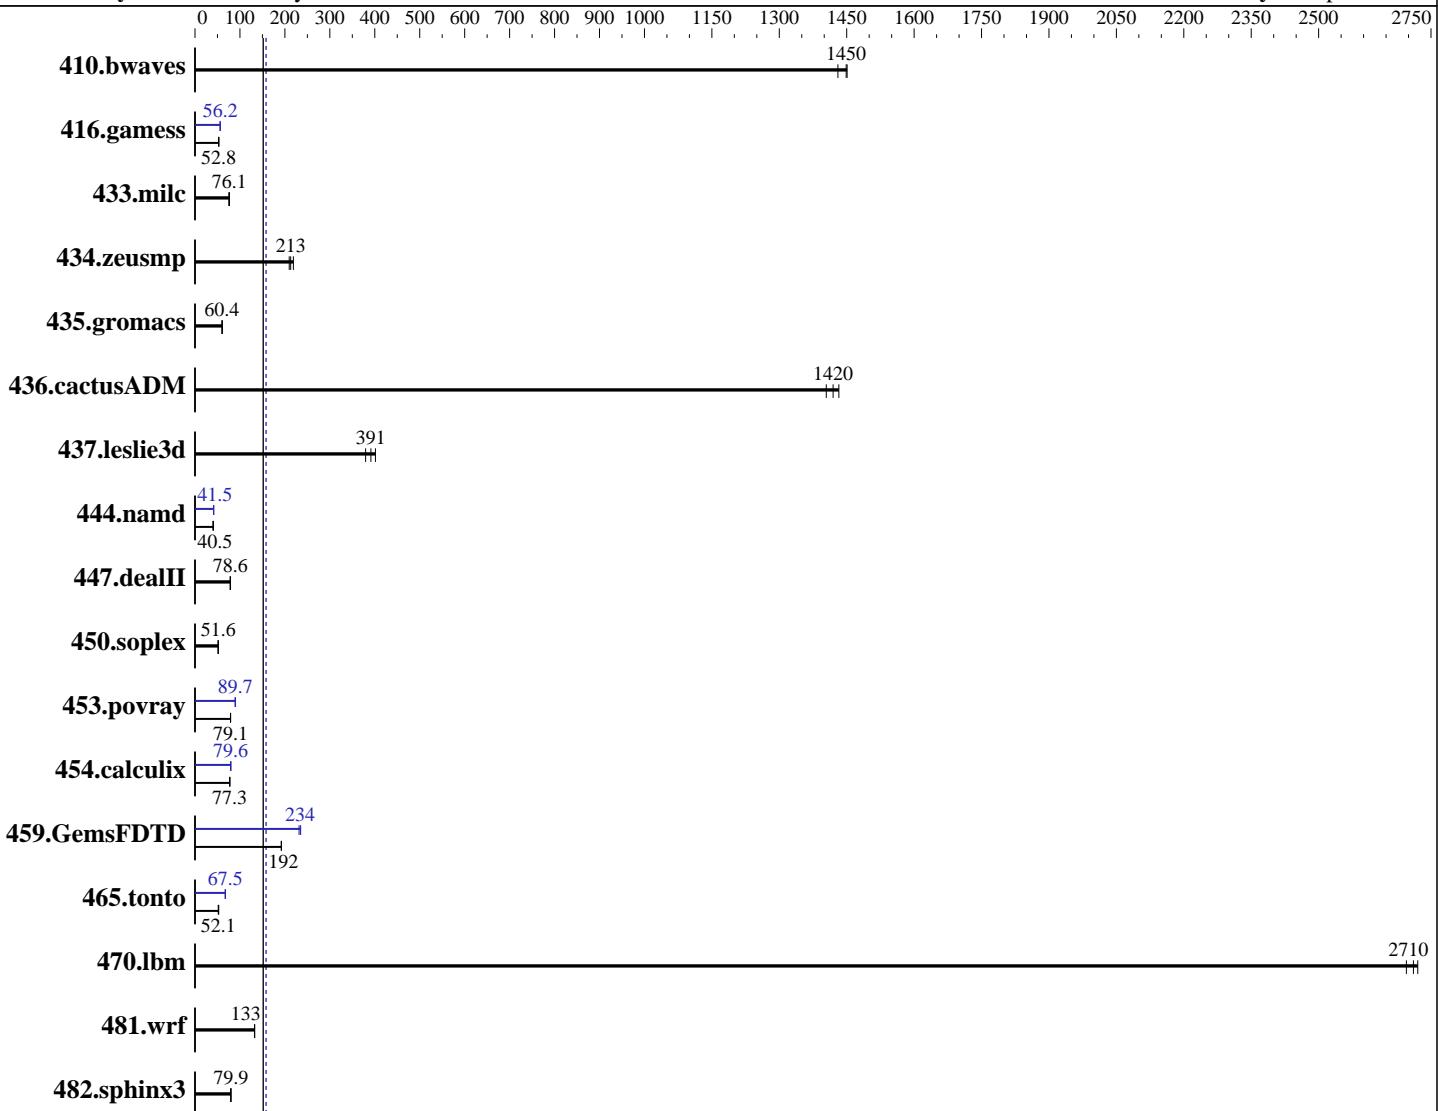

**SPECfp\_base2006 = 152**

**SPECfp2006 = 158**

### Hardware

CPU Name: Intel Xeon Gold 6146  
CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz  
CPU MHz: 3200  
FPU: Integrated  
CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6146  
3.20GHz)

**SPECfp2006 = 158**

**SPECfp\_base2006 = 152**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 400 GB SAS SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>9.38</b>	<b>1450</b>	9.37	1450	9.50	1430	<b>9.38</b>	<b>1450</b>	9.37	1450	9.50	1430
416.gamess	<b>371</b>	<b>52.8</b>	371	52.8	371	52.8	<b>349</b>	<b>56.2</b>	350	56.0	348	56.2
433.milc	<b>121</b>	<b>76.1</b>	122	75.4	120	76.7	<b>121</b>	<b>76.1</b>	122	75.4	120	76.7
434.zeusmp	<b>42.8</b>	<b>213</b>	43.4	210	41.6	219	<b>42.8</b>	<b>213</b>	43.4	210	41.6	219
435.gromacs	118	60.4	<b>118</b>	<b>60.4</b>	118	60.3	118	60.4	<b>118</b>	<b>60.4</b>	118	60.3
436.cactusADM	8.34	1430	8.51	1400	<b>8.42</b>	<b>1420</b>	8.34	1430	8.51	1400	<b>8.42</b>	<b>1420</b>
437.leslie3d	<b>24.0</b>	<b>391</b>	24.8	380	23.4	401	<b>24.0</b>	<b>391</b>	24.8	380	23.4	401
444.namd	<b>198</b>	<b>40.5</b>	198	40.5	198	40.5	193	41.5	193	41.5	<b>193</b>	<b>41.5</b>
447.dealII	146	78.5	<b>145</b>	<b>78.6</b>	145	78.7	<b>146</b>	78.5	<b>145</b>	<b>78.6</b>	145	78.7
450.soplex	<b>161</b>	<b>51.6</b>	161	51.8	162	51.5	<b>161</b>	<b>51.6</b>	161	51.8	162	51.5
453.povray	67.2	79.2	67.3	79.1	<b>67.3</b>	<b>79.1</b>	59.3	89.7	<b>59.3</b>	<b>89.7</b>	59.4	89.6
454.calculix	106	77.5	<b>107</b>	<b>77.3</b>	107	77.2	103	79.7	<b>104</b>	<b>79.6</b>	104	79.3
459.GemsFDTD	<b>55.2</b>	<b>192</b>	55.3	192	55.1	193	45.1	235	<b>45.3</b>	<b>234</b>	45.8	231
465.tonto	186	52.8	<b>189</b>	<b>52.1</b>	190	51.9	<b>146</b>	<b>67.5</b>	146	67.5	146	67.4
470.lbm	5.05	2720	5.10	2700	<b>5.07</b>	<b>2710</b>	5.05	2720	5.10	2700	<b>5.07</b>	<b>2710</b>
481.wrf	84.4	132	84.1	133	<b>84.2</b>	<b>133</b>	84.4	132	84.1	133	<b>84.2</b>	<b>133</b>
482.sphinx3	245	79.5	<b>244</b>	<b>79.9</b>	244	80.0	<b>245</b>	<b>79.5</b>	<b>244</b>	<b>79.9</b>	244	80.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

Intel HyperThreading Technology set to Disabled

CPU performance set to Enterprise

Power Performance Tuning set to OS

SNC set to Disabled

IMC Interleaving set to Auto

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-g83b Sat Aug 19 22:55:52 2017

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6146  
3.20GHz)

**SPECfp2006 =**

**158**

**SPECfp\_base2006 =**

**152**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
        4 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 12
    siblings : 12
    physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
    physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
    physical 2: cores 0 1 2 3 4 8 9 11 17 18 19 20
    physical 3: cores 0 1 2 3 8 9 10 11 18 19 24 27
cache size : 25344 KB
```

From /proc/meminfo

```
MemTotal:      1583705808 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-g83b 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 19 22:15

SPEC is set to: /home/cpu2006-1.2

```
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb7        xfs   416G   22G  394G   6% /home
```

Additional information from dmidecode:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems	<b>SPECfp2006 =</b>	<b>158</b>
Cisco UCS C480 M5 (Intel Xeon Gold 6146 3.20GHz)	<b>SPECfp_base2006 =</b>	<b>152</b>

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C480M5.3.1.0.245.0514171056 05/14/2017  
Memory:  
48x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

OMP\_NUM\_THREADS = "48"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6146  
3.20GHz)

**SPECfp2006 = 158**

**SPECfp\_base2006 = 152**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

<b>Cisco Systems</b>	<b>SPECfp2006 =</b>	<b>158</b>
Cisco UCS C480 M5 (Intel Xeon Gold 6146 3.20GHz)	<b>SPECfp_base2006 =</b>	<b>152</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Aug-2017
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Aug-2017
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Apr-2017

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
             -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-
             -qopt-prefetch -parallel

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -unroll2 -inline-level=0
               -qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
            -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
436.cactusADM: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6146  
3.20GHz)

**SPECfp2006 =** 158

**SPECfp\_base2006 =** 152

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 6 11:46:29 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 September 2017.