SPEC® CFP2006 Result

M Computers s.r.o.

HPC S2600WF (Intel Xeon Silver 4114, 2.20 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 824

CPU2006 license:	4204	**Test date:**	Aug-2017
Test sponsor:	M Computers s.r.o.	**Hardware Availability:**	Jul-2017
Tested by:	M Computers s.r.o.	**Software Availability:**	Apr-2017

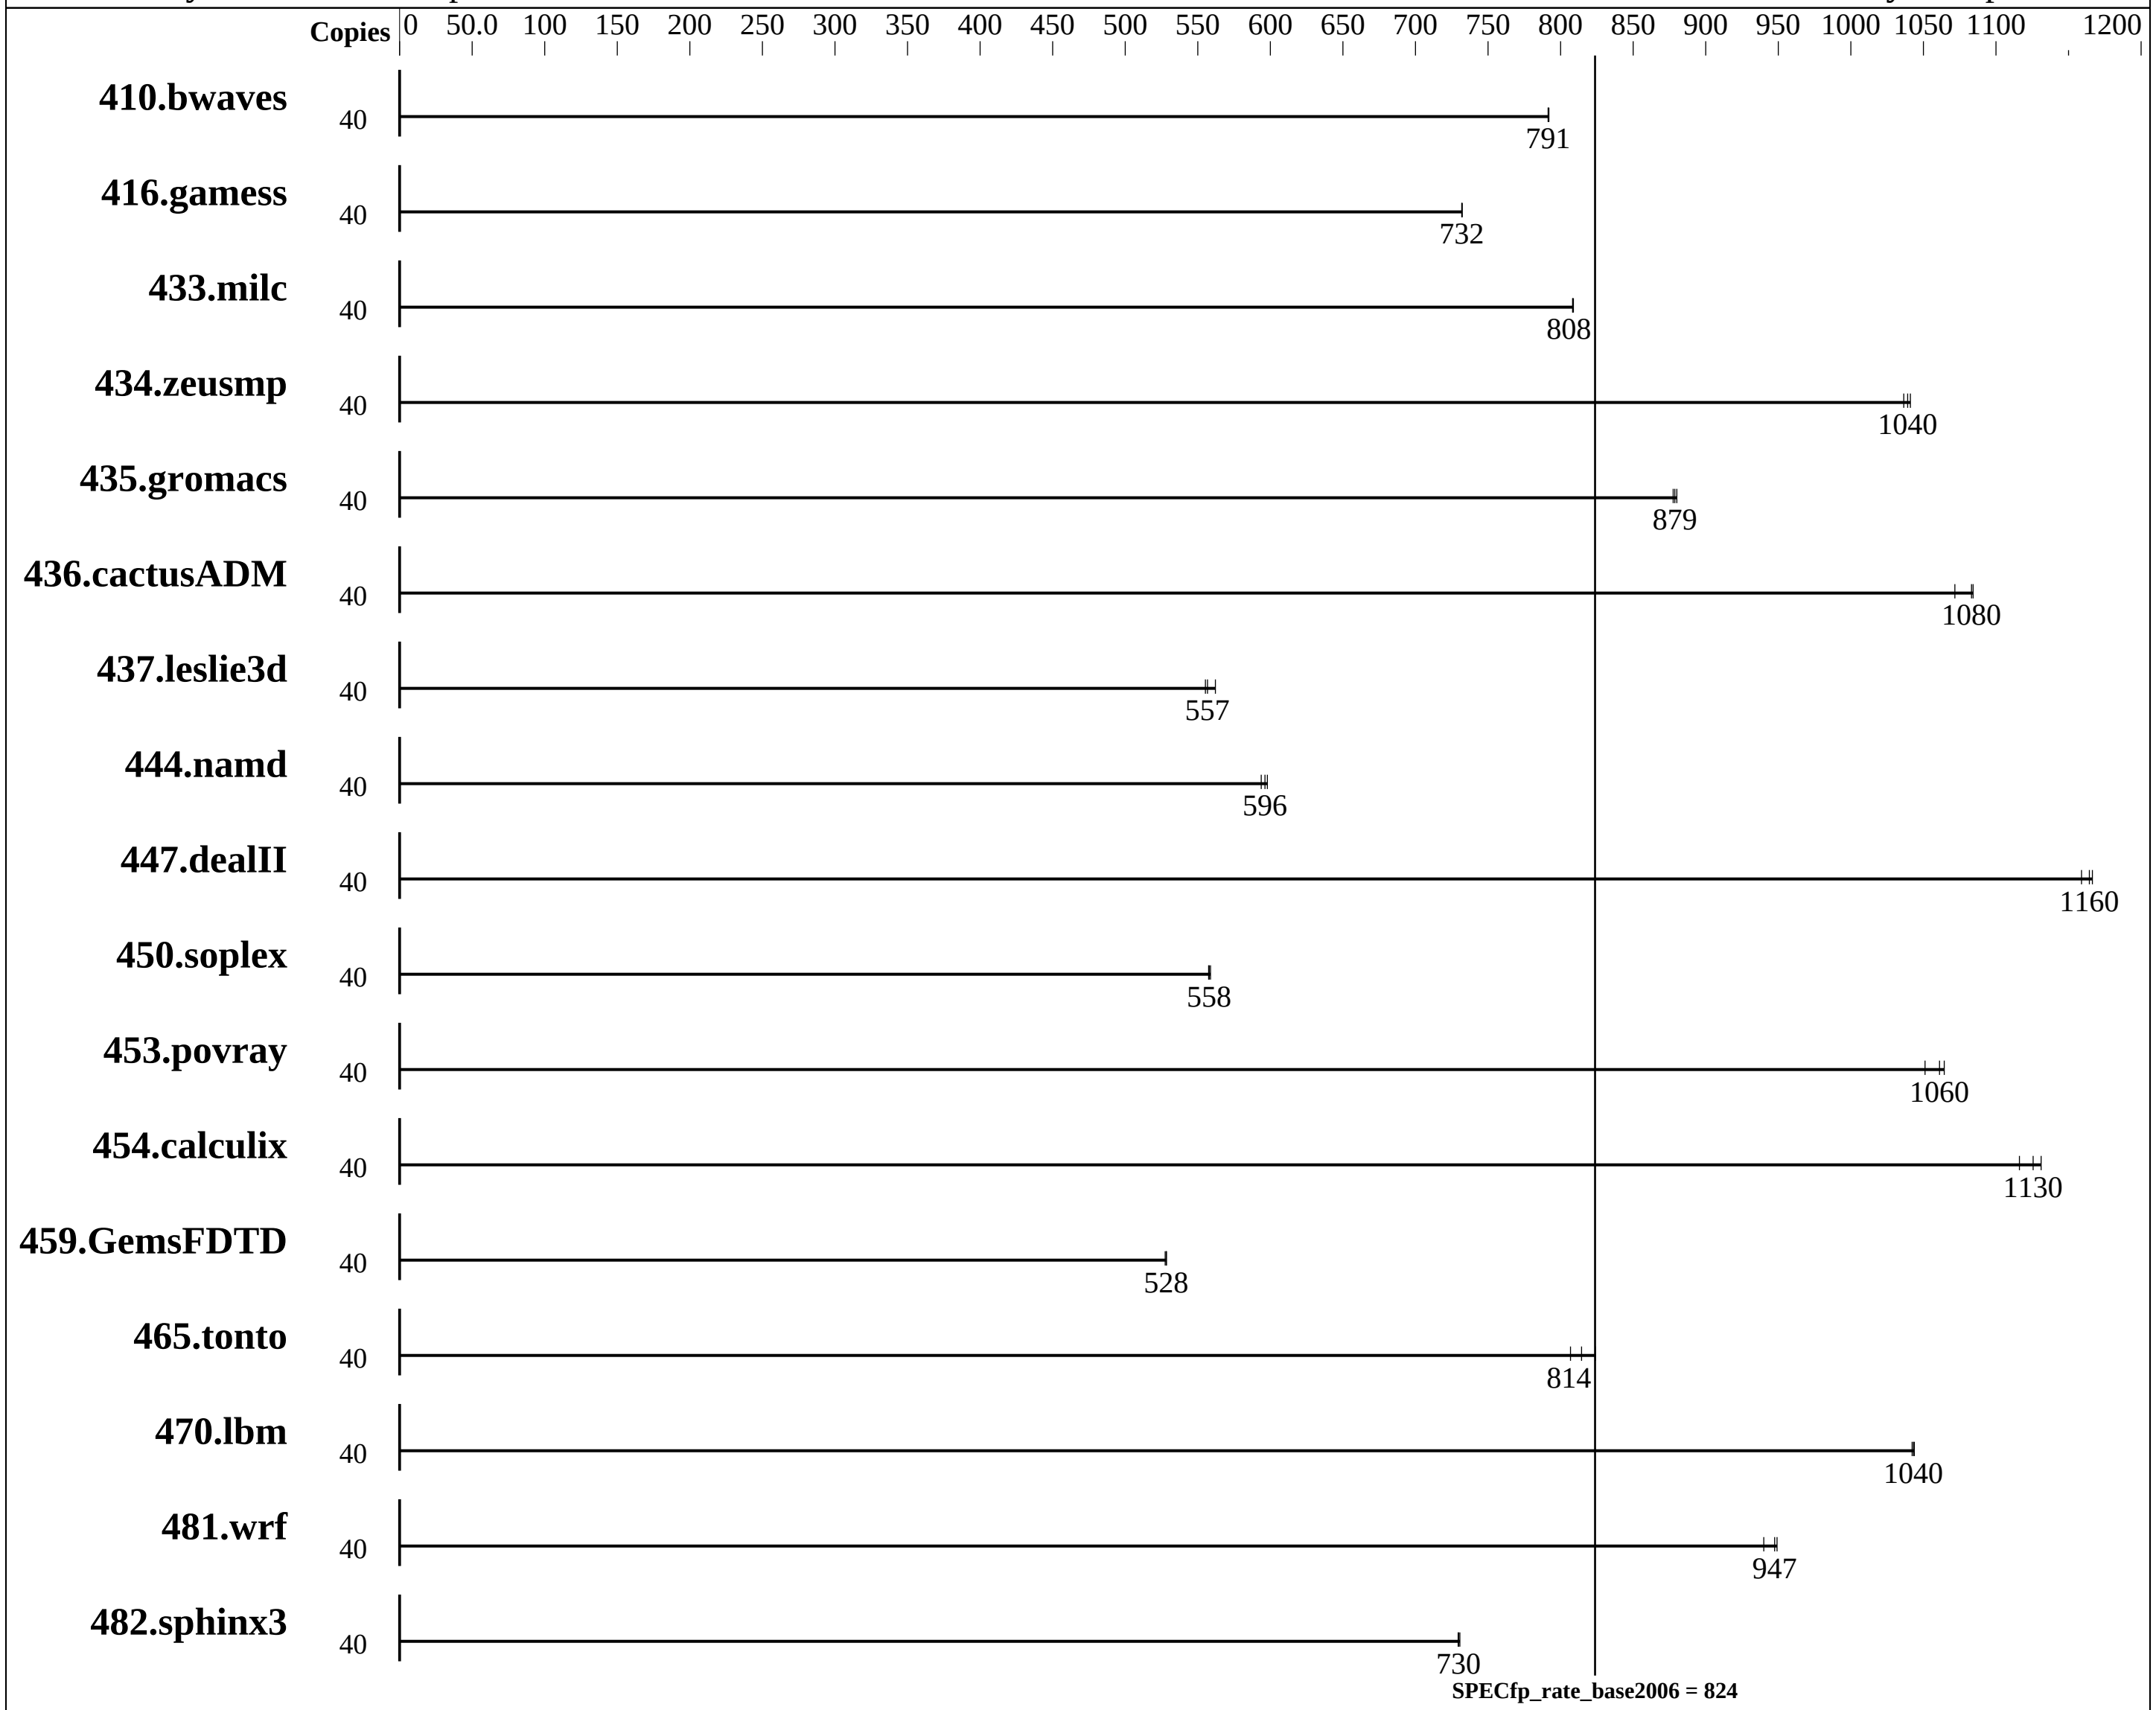

Hardware

CPU Name:	Intel Xeon Silver 4114
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.4.196 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.4.196 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3

Continued on next page

SPEC CFP2006 Result

M Computers s.r.o.

HPC S2600WF (Intel Xeon Silver 4114, 2.20 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 824

CPU2006 license: 4204
Test sponsor: M Computers s.r.o.
Tested by: M Computers s.r.o.
Test date: Aug-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

L3 Cache:	13.75 MB I+D on chip per chip
Other Cache:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC4-2666V-R, running at 2400 MT/s)
Disk Subsystem:	1 x 1600 GB SATA SSD
Other Hardware:	None
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	**687**	**791**	687	791	686	792							
416.gamess	40	1070	732	1070	732	**1070**	**732**							
433.milc	40	**454**	**808**	454	808	454	809							
434.zeusmp	40	350	1040	**350**	**1040**	351	1040							
435.gromacs	40	325	880	**325**	**879**	325	878							
436.cactusADM	40	**441**	**1080**	446	1070	441	1080							
437.leslie3d	40	669	562	**675**	**557**	677	555							
444.namd	40	**538**	**596**	540	594	537	598							
447.dealII	40	**393**	**1160**	395	1160	392	1170							
450.soplex	40	598	557	**598**	**558**	597	559							
453.povray	40	202	1050	**201**	**1060**	200	1060							
454.calculix	40	**293**	**1130**	292	1130	296	1120							
459.GemsFDTD	40	803	528	**803**	**528**	805	528							
465.tonto	40	478	824	488	807	**483**	**814**							
470.lbm	40	527	1040	527	1040	**527**	**1040**							
481.wrf	40	**472**	**947**	475	940	471	949							
482.sphinx3	40	**1068**	**730**	1069	729	1067	731							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Patrol Scrub=Disabled
CPU and Power Performance Policy=Performance
```

Continued on next page

M Computers s.r.o.

HPC S2600WF (Intel Xeon Silver 4114, 2.20 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 824

CPU2006 license: 4204
Test sponsor: M Computers s.r.o.
Tested by: M Computers s.r.o.

Test date: Aug-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

Platform Notes (Continued)

```
Set Fan Profile=Performance
Sysinfo program /spec/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (300de342723409e6453f54e8c50448c3)
running on kvasir Thu Aug 31 15:21:27 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 14080 KB

From /proc/meminfo
   MemTotal:       791028784 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux kvasir 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 31 14:16
```

Continued on next page

Platform Notes (Continued)

```
 SPEC is set to: /spec
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda1      xfs   650G   58G  592G   9% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Intel Corporation SE5C620.86B.0X.01.0007.060920171037 06/09/2017
   Memory:
    24x Kinston 9965640-006.A01G 32 GB 2 rank 2400 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/sh11.2"

 Binaries compiled on a system with 2x Intel Xeon-SP 4112 CPU + 192GB RAM
 memory using Redhat Enterprise Linux 7.3
 Transparent Huge Pages enabled by default.
 Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
    `icc -m64`

C++ benchmarks:
    `icpc -m64`

Fortran benchmarks:
    `ifort -m64`

Benchmarks using both Fortran and C:
    `icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revB.20170920.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revB.20170920.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 20 11:01:35 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.