



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp®2006 = 76.2

SPECfp_base2006 = 74.6

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

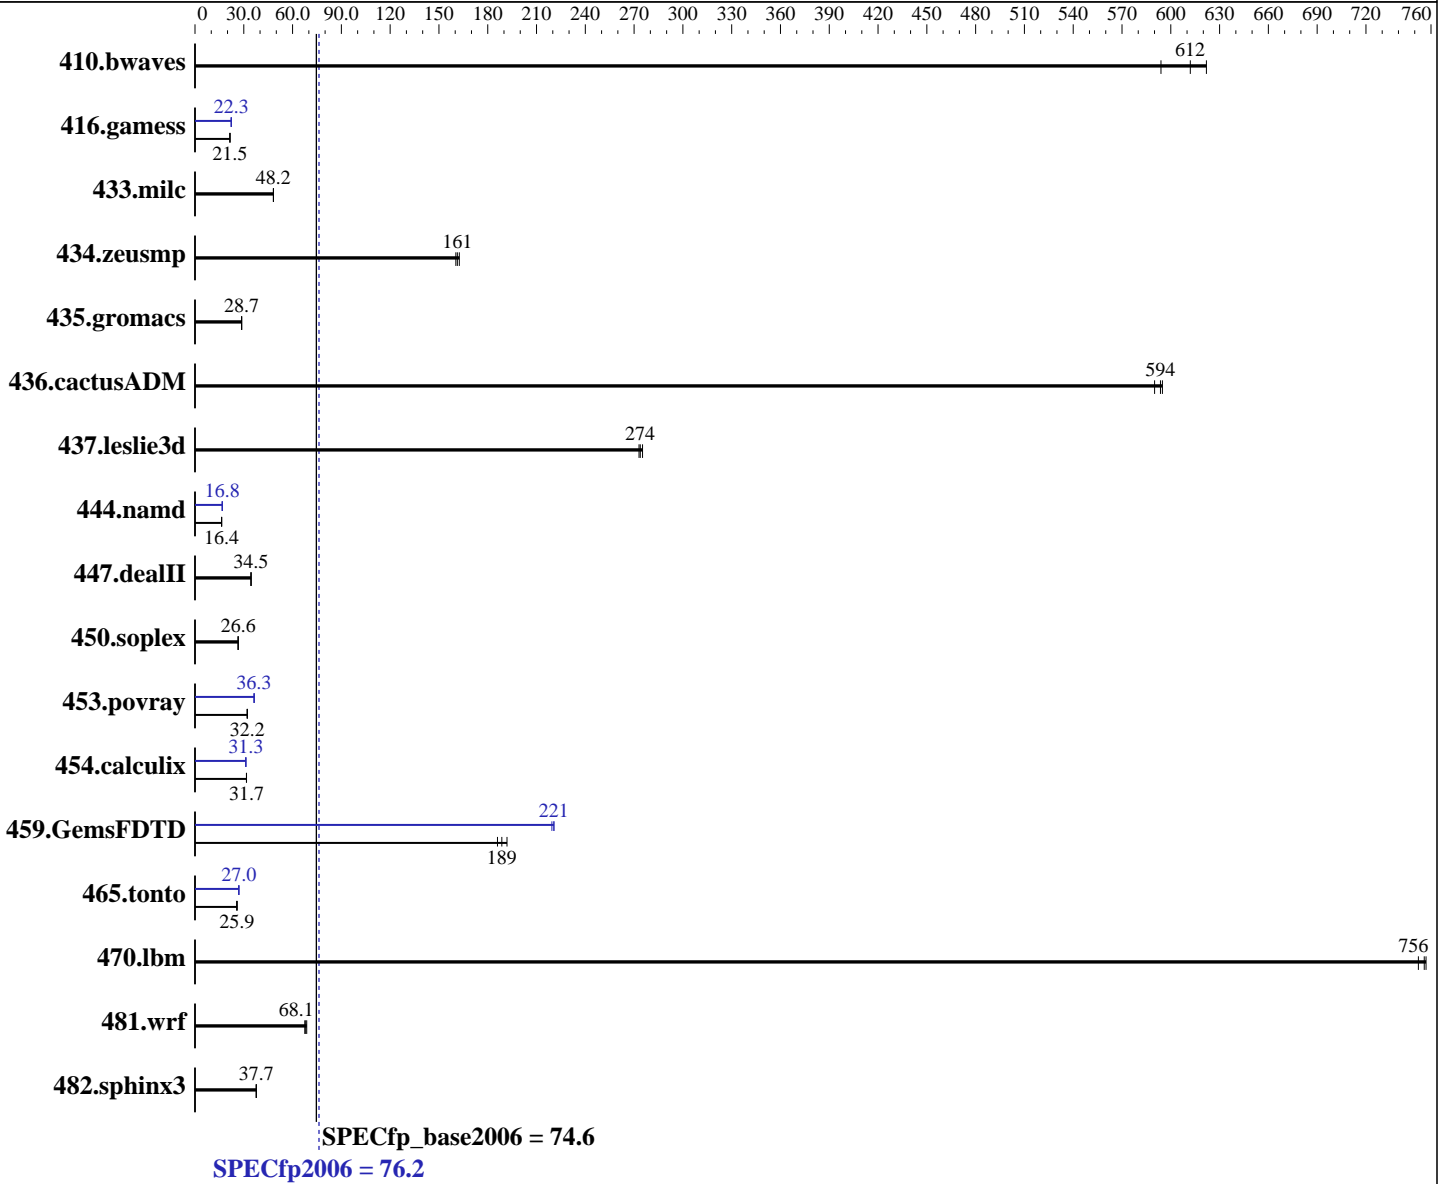

Hardware	
CPU Name:	Intel Xeon Bronze 3106
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software	
Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	btrfs
System State:	Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = **76.2**

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp_base2006 = **74.6**

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

L3 Cache: 11 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2133 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.9	622	22.2	612	22.9	594	21.9	622	22.2	612	22.9	594
416.gamess	912	21.5	912	21.5	910	21.5	878	22.3	878	22.3	878	22.3
433.milc	190	48.2	190	48.2	190	48.2	190	48.2	190	48.2	190	48.2
434.zeusmp	56.7	160	56.0	163	56.4	161	56.7	160	56.0	163	56.4	161
435.gromacs	249	28.6	249	28.7	249	28.7	249	28.6	249	28.7	249	28.7
436.cactusADM	20.1	595	20.3	590	20.1	594	20.1	595	20.3	590	20.1	594
437.leslie3d	34.2	275	34.3	274	34.4	273	34.2	275	34.3	274	34.4	273
444.namd	490	16.4	490	16.4	490	16.4	478	16.8	478	16.8	479	16.8
447.dealII	332	34.5	332	34.5	332	34.5	332	34.5	332	34.5	332	34.5
450.soplex	314	26.6	314	26.5	314	26.6	314	26.6	314	26.5	314	26.6
453.povray	165	32.2	166	32.0	165	32.2	146	36.4	146	36.3	147	36.3
454.calculix	260	31.7	260	31.7	261	31.6	264	31.2	264	31.3	264	31.3
459.GemsFDTD	57.0	186	55.3	192	56.2	189	48.1	221	48.1	221	48.3	219
465.tonto	381	25.9	384	25.6	380	25.9	366	26.9	365	27.0	364	27.0
470.lbm	18.2	757	18.3	752	18.2	756	18.2	757	18.3	752	18.2	756
481.wrf	164	68.1	163	68.7	165	67.5	164	68.1	163	68.7	165	67.5
482.sphinx3	518	37.7	517	37.7	517	37.7	518	37.7	517	37.7	517	37.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance

Uncore Frequency Scaling set to Disable

L3C dead line alloc set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-ickx Thu Aug 3 19:22:46 2017

This section contains SUT (System Under Test) info as seen by

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 76.2

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp_base2006 = 74.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz
  2 "physical id"s (chips)
  16 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 8
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
  cache size : 11264 KB

```

```

From /proc/meminfo
MemTotal:      395884408 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or
  # release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-ickx 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 3 19:21

```

SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    744G  180G  561G   25% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 76.2

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp_base2006 = 74.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE105Z-1.00]- 04/27/2017

Memory:

12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 76.2

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp_base2006 = 74.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

```

Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 76.2

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp_base2006 = 74.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(1.70 GHz, Intel Xeon Bronze 3106)

SPECfp2006 = 76.2

SPECfp_base2006 = 74.6

CPU2006 license: 9017

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 20 11:04:24 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.