SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5118)

SPECint®_rate2006 = 1190

SPECint_rate_base2006 = 1130

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

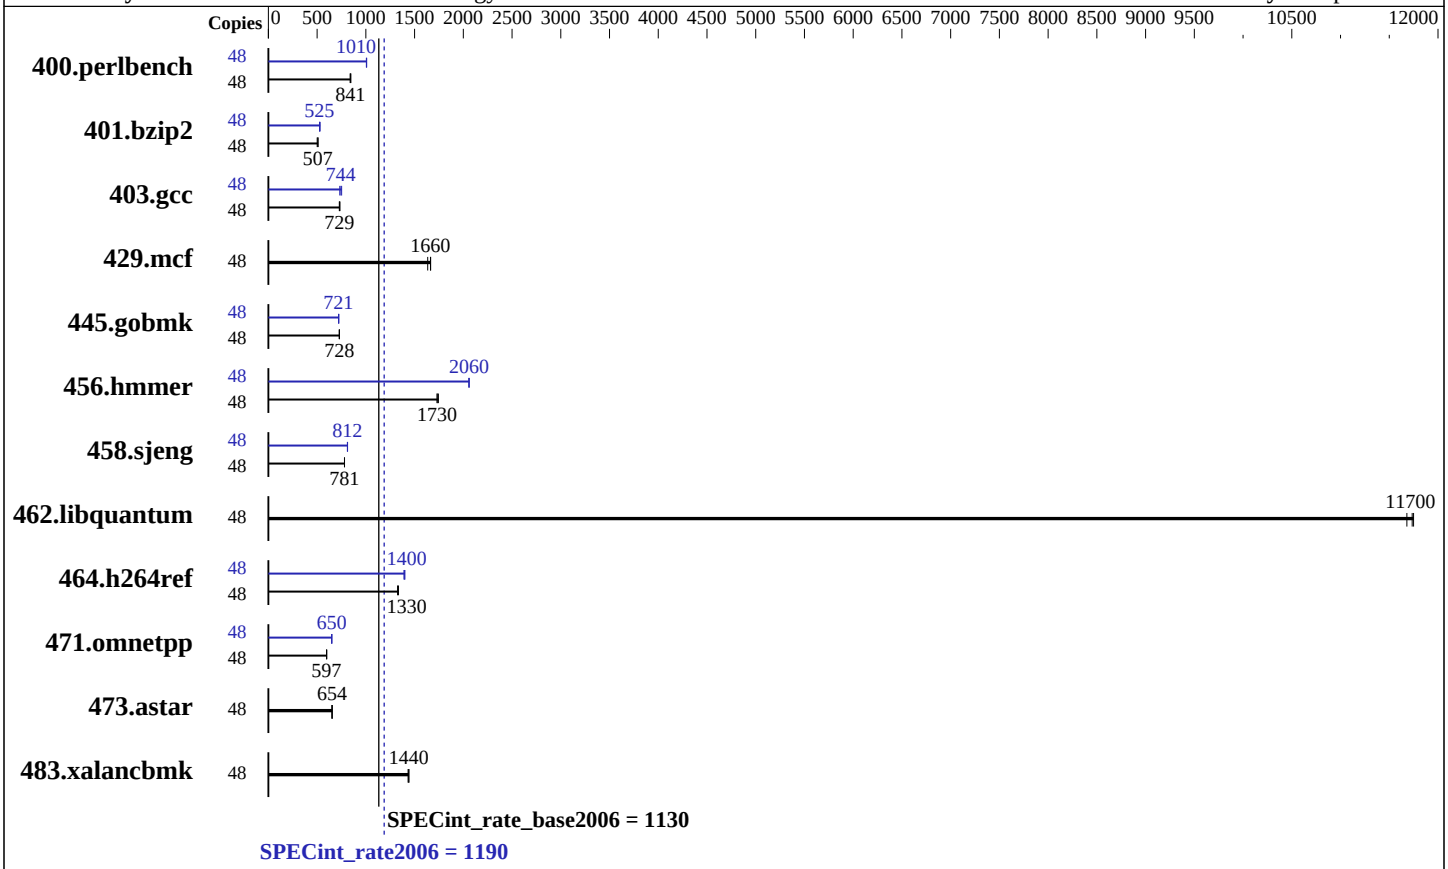

Hardware

CPU Name:	Intel Xeon Gold 5118
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	16.5 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400 MHz)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5118)

SPECint_rate2006 = 1190

SPECint_rate_base2006 = 1130

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	558	840	554	847	**558**	**841**	48	**466**	**1010**	466	1010	465	1010
401.bzip2	48	925	501	909	510	**913**	**507**	48	872	531	883	525	**883**	**525**
403.gcc	48	531	728	526	735	**530**	**729**	48	514	752	**519**	**744**	528	732
429.mcf	48	268	1630	**263**	**1660**	263	1660	48	268	1630	**263**	**1660**	263	1660
445.gobmk	48	691	729	692	728	**692**	**728**	48	697	722	**698**	**721**	699	721
456.hmmer	48	257	1740	**259**	**1730**	259	1730	48	218	2060	217	2060	**218**	**2060**
458.sjeng	48	744	781	**744**	**781**	744	781	48	716	811	715	812	**716**	**812**
462.libquantum	48	85.1	11700	**84.8**	**11700**	84.6	11700	48	85.1	11700	**84.8**	**11700**	84.6	11700
464.h264ref	48	796	1330	**799**	**1330**	801	1330	48	759	1400	**760**	**1400**	764	1390
471.omnetpp	48	503	596	501	599	**502**	**597**	48	461	651	462	650	**461**	**650**
473.astar	48	515	654	516	653	**515**	**654**	48	515	654	516	653	**515**	**654**
483.xalancbmk	48	**230**	**1440**	231	1430	230	1440	48	**230**	**1440**	231	1430	230	1440

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Operating Mode set to Maximum Performance
SNC set to Enable
DCU Streamer Prefetcher set to Disable
Per Core P-state set to Disable
LLC dead line alloc set to Disable
 Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-ickx Thu Jan  1 08:01:47 1970

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
       2 "physical id"s (chips)
```

Continued on next page

Platform Notes (Continued)

```
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 12
      siblings  : 24
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
   cache size : 16896 KB

From /proc/meminfo
   MemTotal:       395883412 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-ickx 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 1 08:00

SPEC is set to: /home/cpu2006-1.2-ic17.0u3
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  744G  140G  603G  19% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Lenovo -[TEE105Z-1.00]- 04/27/2017
  Memory:
   12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz, configured at 2400 MHz
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
-qopt-ra-region-strategy=block
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 20 11:04:45 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.