



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp®\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

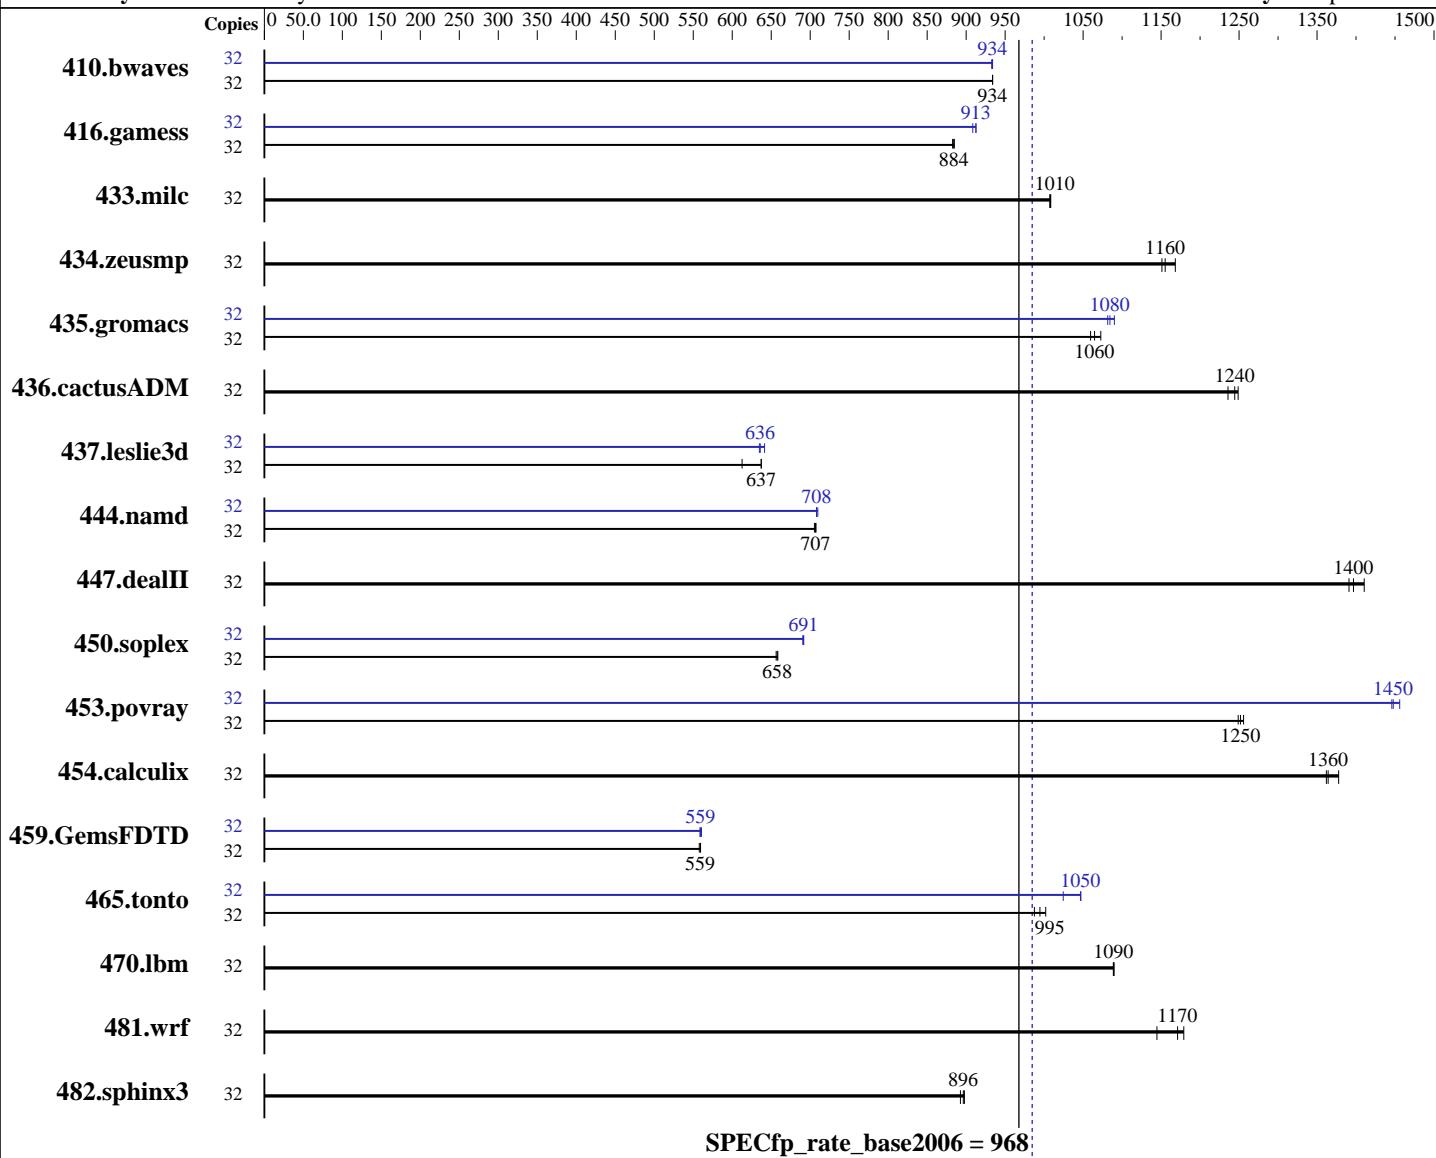

**SPECfp\_rate\_base2006 = 968**

**SPECfp\_rate2006 = 985**

### Hardware

CPU Name: Intel Xeon Gold 6134  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3200  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 1 x 800 GB SSD SAS  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>466</b>	<b>934</b>	466	934	466	934	32	<b>466</b>	<b>933</b>	466	934	<b>466</b>	<b>934</b>
416.gamess	32	<b>709</b>	<b>884</b>	710	883	708	885	32	<b>690</b>	<b>908</b>	687	913	<b>687</b>	<b>913</b>
433.milc	32	292	1010	291	1010	<b>291</b>	<b>1010</b>	32	<b>292</b>	<b>1010</b>	291	1010	<b>291</b>	<b>1010</b>
434.zeusmp	32	249	1170	253	1150	<b>252</b>	<b>1160</b>	32	249	1170	253	1150	<b>252</b>	<b>1160</b>
435.gromacs	32	213	1070	<b>215</b>	<b>1060</b>	216	1060	32	210	1090	<b>211</b>	<b>1080</b>	211	1080
436.cactusADM	32	309	1240	306	1250	<b>307</b>	<b>1240</b>	32	309	1240	306	1250	<b>307</b>	<b>1240</b>
437.leslie3d	32	<b>472</b>	<b>637</b>	472	637	491	613	32	474	635	<b>473</b>	<b>636</b>	469	641
444.namd	32	363	707	<b>363</b>	<b>707</b>	364	705	32	<b>362</b>	<b>708</b>	362	710	362	708
447.dealII	32	260	1410	<b>262</b>	<b>1400</b>	263	1390	32	260	1410	<b>262</b>	<b>1400</b>	263	1390
450.soplex	32	405	658	<b>406</b>	<b>658</b>	407	656	32	<b>386</b>	<b>691</b>	386	692	386	691
453.povray	32	136	1260	136	1250	<b>136</b>	<b>1250</b>	32	117	1460	118	1450	<b>118</b>	<b>1450</b>
454.calculix	32	192	1380	<b>194</b>	<b>1360</b>	194	1360	32	192	1380	<b>194</b>	<b>1360</b>	194	1360
459.GemsFDTD	32	<b>607</b>	<b>559</b>	609	558	607	559	32	606	561	608	559	<b>607</b>	<b>559</b>
465.tonto	32	<b>317</b>	<b>995</b>	314	1000	319	987	32	307	1020	301	1050	<b>301</b>	<b>1050</b>
470.lbm	32	<b>404</b>	<b>1090</b>	403	1090	404	1090	32	<b>404</b>	<b>1090</b>	403	1090	404	1090
481.wrf	32	303	1180	312	1140	<b>305</b>	<b>1170</b>	32	303	1180	312	1140	<b>305</b>	<b>1170</b>
482.sphinx3	32	695	898	<b>696</b>	<b>896</b>	699	893	32	<b>695</b>	<b>898</b>	<b>696</b>	<b>896</b>	699	893

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
 Intel HyperThreading Technology set to Enabled  
 CPU performance set to Enterprise

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Platform Notes (Continued)

Power Performance Tuning set to OS

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-0fck Sat Aug 26 22:10:15 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 10 19 24
physical 1: cores 0 2 3 4 16 19 25 26
cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      394864388 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-0fck 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 26 14:10

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        xfs   500G  39G  461G  8% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017
Memory:
 24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -fno-alias -auto-ilp32
    -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134,  
3.20GHz)

**SPECfp\_rate2006 = 985**

**SPECfp\_rate\_base2006 = 968**

**CPU2006 license:** 9019

**Test date:** Aug-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:07:33 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 September 2017.