



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint®2006 = 75.4**

**SPECint\_base2006 = 71.6**

**CPU2006 license:** 9017


**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Sep-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

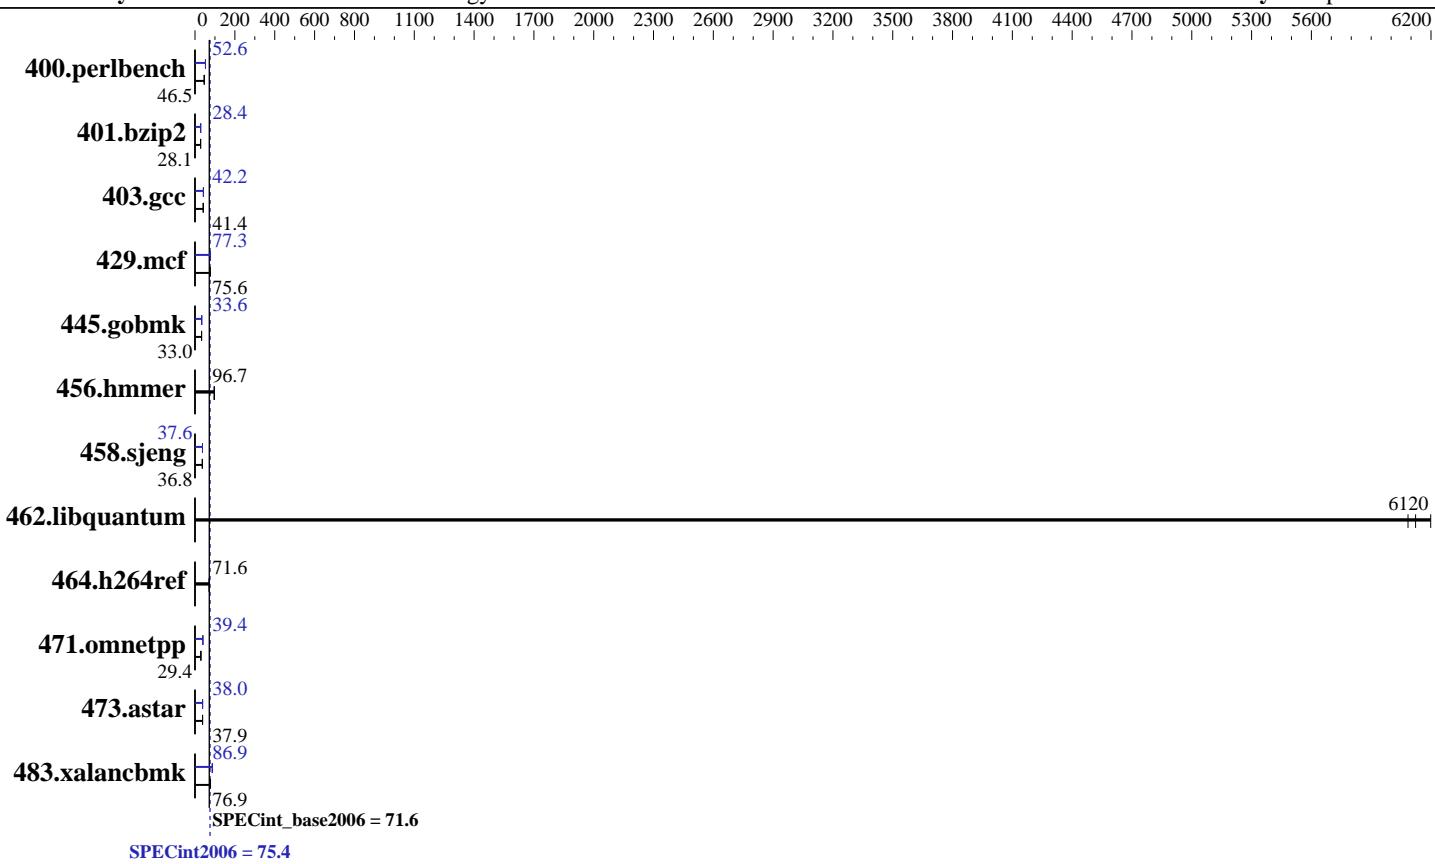

### Hardware

CPU Name: Intel Xeon Platinum 8156  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip  
CPU(s) orderable: 2,4,8 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 16.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SAS SSD  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
Compiler: Kernel 3.10.0-514.el7.x86\_64  
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint2006 = 75.4**

**SPECint\_base2006 = 71.6**

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>210</b>	<b>46.5</b>	212	46.2	209	46.7	186	52.5	<b>186</b>	<b>52.6</b>	186	52.6
401.bzip2	<b>344</b>	<b>28.1</b>	342	28.2	344	28.1	<b>340</b>	<b>28.4</b>	340	28.4	340	28.4
403.gcc	<b>194</b>	<b>41.4</b>	194	41.4	194	41.5	191	42.1	<b>191</b>	<b>42.2</b>	191	42.2
429.mcf	122	75.1	<b>121</b>	<b>75.6</b>	119	76.5	118	77.2	<b>118</b>	<b>77.3</b>	117	77.9
445.gobmk	<b>318</b>	<b>33.0</b>	318	33.0	319	32.9	312	33.6	<b>312</b>	<b>33.6</b>	312	33.6
456.hmmer	96.4	96.7	96.6	96.6	<b>96.5</b>	<b>96.7</b>	96.4	96.7	96.6	96.6	<b>96.5</b>	<b>96.7</b>
458.sjeng	328	36.8	329	36.8	<b>329</b>	<b>36.8</b>	<b>322</b>	<b>37.6</b>	322	37.6	322	37.6
462.libquantum	3.34	6200	<b>3.38</b>	<b>6120</b>	3.41	6080	3.34	6200	<b>3.38</b>	<b>6120</b>	3.41	6080
464.h264ref	309	71.5	309	71.7	<b>309</b>	<b>71.6</b>	309	71.5	309	71.7	<b>309</b>	<b>71.6</b>
471.omnetpp	214	29.2	212	29.4	<b>212</b>	<b>29.4</b>	159	39.3	<b>159</b>	<b>39.4</b>	158	39.6
473.astar	185	37.9	185	38.0	<b>185</b>	<b>37.9</b>	184	38.1	<b>185</b>	<b>38.0</b>	185	38.0
483.xalancbmk	88.5	78.0	89.8	76.8	<b>89.7</b>	<b>76.9</b>	<b>79.4</b>	<b>86.9</b>	79.3	87.0	79.7	86.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Hyper-Threading set to Disable

Stale AtoS set to Enable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on Proton8S-RHEL7.3 Wed Aug 30 01:22:35 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8156 CPU @ 3.60GHz

8 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint2006 = 75.4**

**SPECint\_base2006 = 71.6**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Sep-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
caution.)  
    cpu cores : 4  
    siblings   : 4  
    physical 0: cores 1 5 9 13  
    physical 1: cores 0 3 10 13  
    physical 2: cores 1 2 5 11  
    physical 3: cores 1 5 9 13  
    physical 4: cores 1 2 5 11  
    physical 5: cores 1 5 9 13  
    physical 6: cores 1 5 9 13  
    physical 7: cores 1 5 9 13  
    cache size : 16896 KB  
  
From /proc/meminfo  
MemTotal:      3170214748 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.3 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.3"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server  
  
uname -a:  
Linux Proton8S-RHEL7.3 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT  
2016 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Aug 29 20:56  
  
SPEC is set to: /home/cpu2006-1.2-ic17.0u3  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
 /dev/sda3       xfs   743G   27G   717G   4% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS Lenovo -[PSE105L-1.00]- 06/22/2017  
Memory:  
96x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint2006 = 75.4**

**SPECint\_base2006 = 71.6**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Sep-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,3"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/shl0.2"

OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint2006 = 75.4**

**SPECint\_base2006 = 71.6**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Aug-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Apr-2017

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
473.astar: icpc -m64
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -DSPEC_CPU_LP64
```

```
429.mcf: -DSPEC_CPU_LP64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -DSPEC_CPU_LP64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint2006 = 75.4**

**SPECint\_base2006 = 71.6**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Aug-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch
```

```
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch
```

```
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32
```

```
429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
           -qopt-prefetch -auto-p32
```

```
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)
```

```
456.hmmmer: basepeak = yes
```

```
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-ra-region-strategy=block
               -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

```
473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

```
483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
                -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(3.60 GHz, Intel Xeon Platinum 8156)

**SPECint2006 =** **75.4**

**SPECint\_base2006 =** **71.6**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Sep-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:34:33 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.