



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

**Test date:** Aug-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

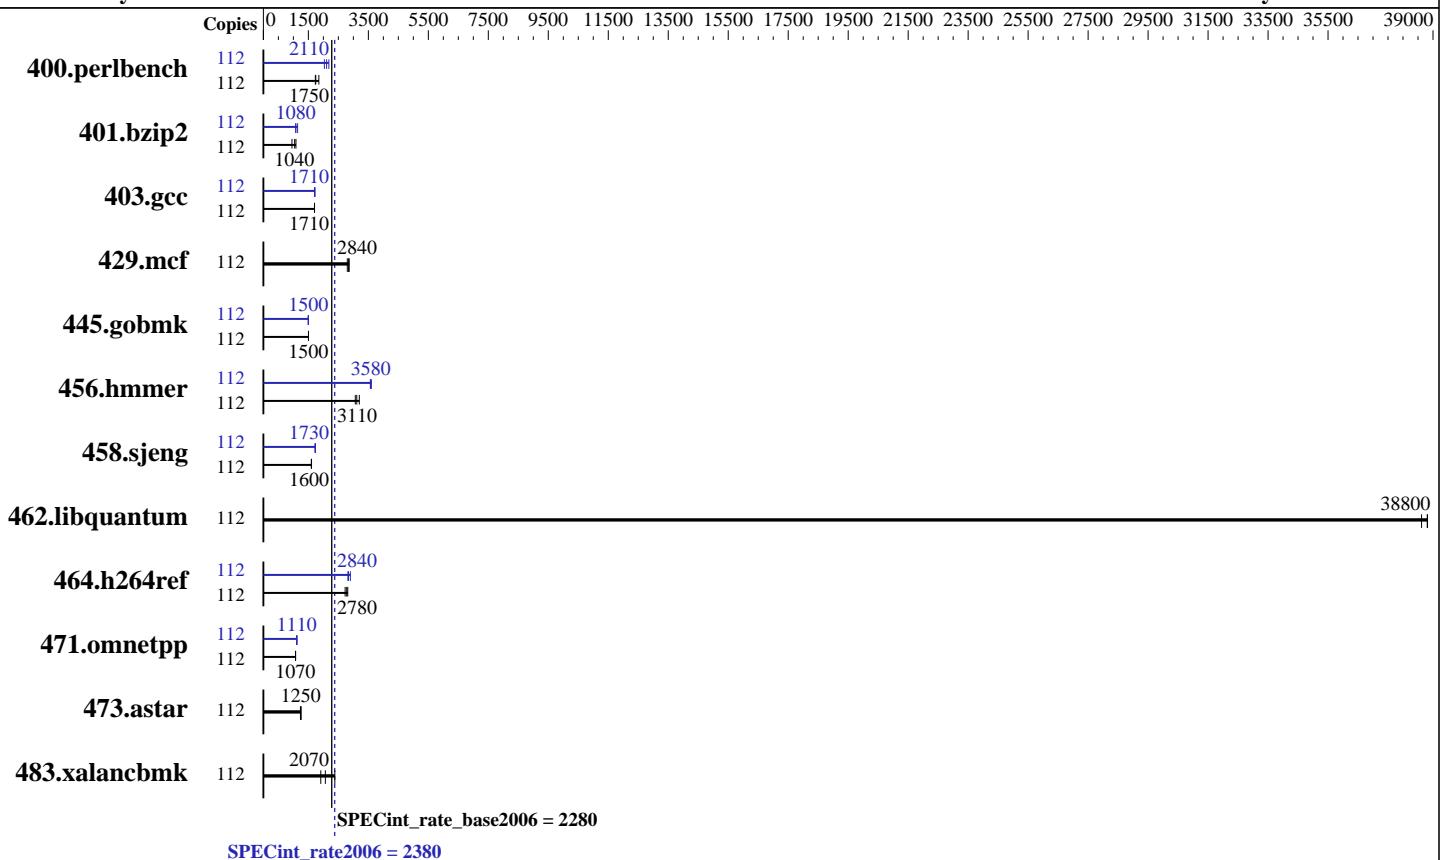

## Hardware

CPU Name: Intel Xeon Platinum 8176  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 960 GB SATA SSD  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 SP3 (x86\_64) 4.4.70-2-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2017

Hardware Availability: Sep-2017

Software Availability: Nov-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	112	592	1850	632	1730	<b><u>626</u></b>	<b><u>1750</u></b>	112	538	2030	<b><u>519</u></b>	<b><u>2110</u></b>	501	2180
401.bzip2	112	995	1090	<b><u>1037</u></b>	<b><u>1040</u></b>	1134	953	112	<b><u>999</u></b>	<b><u>1080</u></b>	1001	1080	<b><u>947</u></b>	1140
403.gcc	112	529	1700	529	1710	<b><u>529</u></b>	<b><u>1710</u></b>	112	526	1710	<b><u>526</u></b>	<b><u>1710</u></b>	527	1710
429.mcf	112	357	2860	365	2800	<b><u>360</u></b>	<b><u>2840</u></b>	112	357	2860	365	2800	<b><u>360</u></b>	<b><u>2840</u></b>
445.gobmk	112	782	1500	781	1500	<b><u>781</u></b>	<b><u>1500</u></b>	112	<b><u>784</u></b>	<b><u>1500</u></b>	784	1500	783	1500
456.hammer	112	327	3200	341	3060	<b><u>336</u></b>	<b><u>3110</u></b>	112	<b><u>292</u></b>	<b><u>3580</u></b>	290	3600	<b><u>293</u></b>	3570
458.sjeng	112	844	1610	847	1600	<b><u>846</u></b>	<b><u>1600</u></b>	112	783	1730	<b><u>784</u></b>	<b><u>1730</u></b>	784	1730
462.libquantum	112	59.8	38800	<b><u>59.8</u></b>	<b><u>38800</u></b>	60.1	38600	112	59.8	38800	<b><u>59.8</u></b>	<b><u>38800</u></b>	60.1	38600
464.h264ref	112	<b><u>892</u></b>	<b><u>2780</u></b>	881	2810	909	2730	112	854	2900	<b><u>873</u></b>	<b><u>2840</u></b>	879	2820
471.omnetpp	112	652	1070	653	1070	<b><u>653</u></b>	<b><u>1070</u></b>	112	<b><u>628</u></b>	<b><u>1110</u></b>	627	1120	628	1110
473.astar	112	626	1260	636	1240	<b><u>631</u></b>	<b><u>1250</u></b>	112	626	1260	636	1240	<b><u>631</u></b>	<b><u>1250</u></b>
483.xalancbmk	112	324	2380	404	1910	<b><u>374</u></b>	<b><u>2070</u></b>	112	324	2380	404	1910	<b><u>374</u></b>	<b><u>2070</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /root/cpu2006-1.2\_ic17u3/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-287k Tue Aug 29 20:24:45 2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
        2 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 28
    siblings   : 56
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      196681728 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-287k 4.4.70-2-default #1 SMP Wed Jun 7 15:12:06 UTC 2017
(4502c76) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 29 19:40
```

```
SPEC is set to: /root/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        btrfs  928G  7.3G  919G  1% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2017

Hardware Availability: Sep-2017

Software Availability: Nov-2016

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 08/10/2017

Memory:

12x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz  
4x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2\_ic17u3/lib/ia32:/root/cpu2006-1.2\_ic17u3/lib/intel64:/root/cpu2006-1.2\_ic17u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2017

Hardware Availability: Sep-2017

Software Availability: Nov-2016

## Base Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

## Peak Portability Flags (Continued)

```

456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
            -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div
          -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmr: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
           -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll14 -auto-ilp32
            -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
              -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

```

C++ benchmarks:

```

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
              -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2)

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8176, 2.10 GHz)

**SPECint\_rate2006 = 2380**

**SPECint\_rate\_base2006 = 2280**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

```
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:39:17 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.