



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

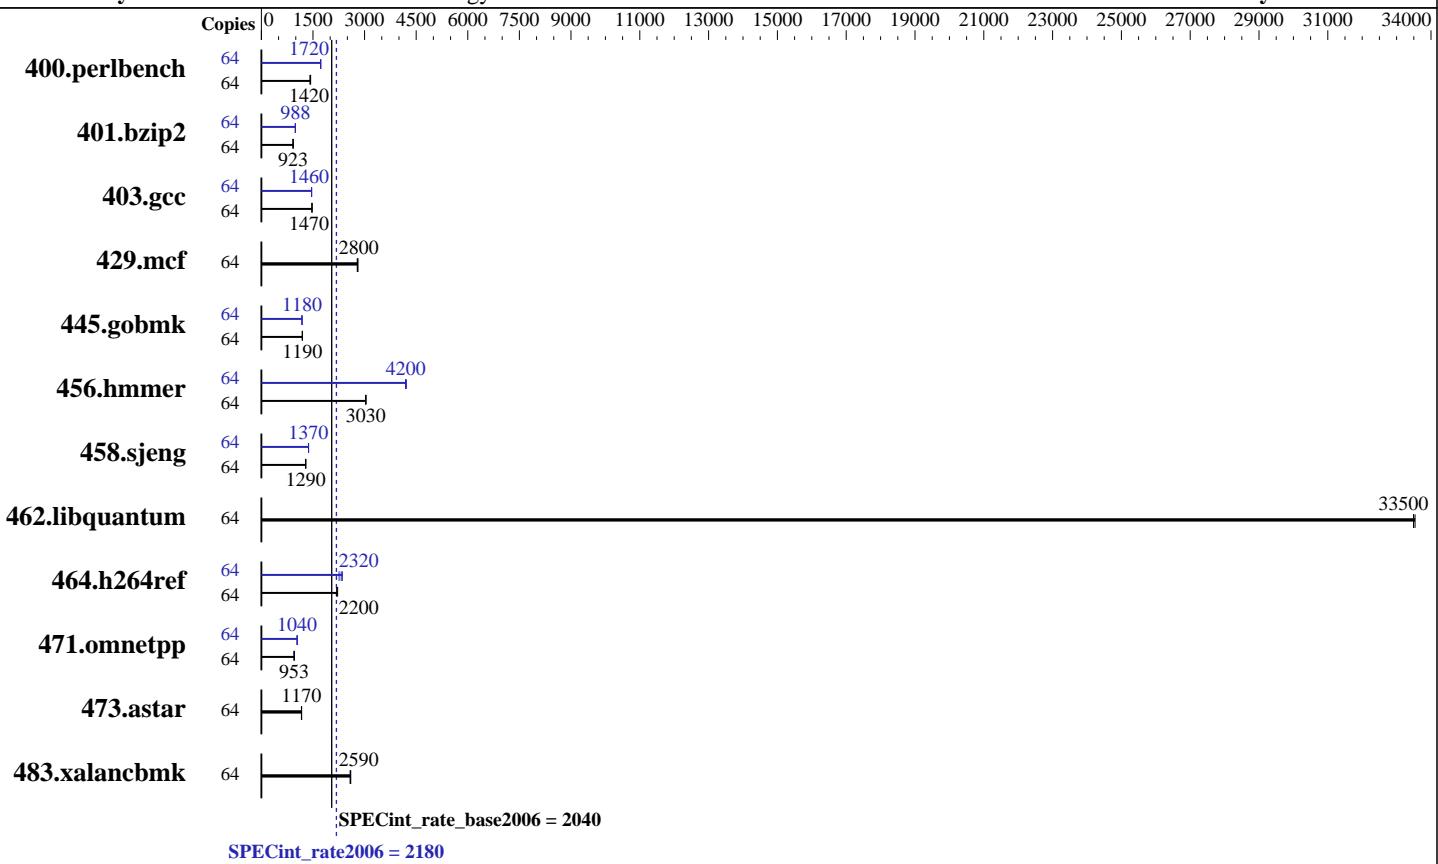

### Hardware

CPU Name:	Intel Xeon Gold 6134
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	24.75 MB I+D on chip per chip
Other Cache:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	800 GB tmpfs
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64)
Compiler:	Kernel 4.4.21-69-default
Auto Parallel:	C/C++: Version 17.0.1.132 of Intel C/C++ Compiler for Linux
File System:	No
System State:	tmpfs
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	437	1430	441	1420	<b>441</b>	<b>1420</b>	64	362	1730	363	1720	<b>363</b>	<b>1720</b>
401.bzip2	64	<b>669</b>	<b>923</b>	673	918	667	925	64	625	989	<b>625</b>	<b>988</b>	625	987
403.gcc	64	<b>350</b>	<b>1470</b>	350	1470	350	1470	64	<b>353</b>	<b>1460</b>	353	1460	352	1460
429.mcf	64	209	2790	<b>208</b>	<b>2800</b>	208	2810	64	209	2790	<b>208</b>	<b>2800</b>	208	2810
445.gobmk	64	562	1190	<b>563</b>	<b>1190</b>	566	1190	64	570	1180	568	1180	<b>569</b>	<b>1180</b>
456.hammer	64	197	3030	196	3040	<b>197</b>	<b>3030</b>	64	<b>142</b>	<b>4200</b>	142	4220	143	4190
458.sjeng	64	<b>601</b>	<b>1290</b>	602	1290	600	1290	64	<b>565</b>	<b>1370</b>	565	1370	565	1370
462.libquantum	64	39.5	33500	39.6	33500	<b>39.6</b>	<b>33500</b>	64	39.5	33500	39.6	33500	<b>39.6</b>	<b>33500</b>
464.h264ref	64	<b>645</b>	<b>2200</b>	646	2190	639	2220	64	<b>610</b>	<b>2320</b>	627	2260	602	2350
471.omnetpp	64	419	955	<b>420</b>	<b>953</b>	420	951	64	<b>385</b>	<b>1040</b>	385	1040	384	1040
473.astar	64	<b>385</b>	<b>1170</b>	384	1170	386	1160	64	<b>385</b>	<b>1170</b>	384	1170	386	1160
483.xalancbmk	64	170	2600	<b>170</b>	<b>2590</b>	171	2580	64	170	2600	<b>170</b>	<b>2590</b>	171	2580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Tmpfs filesystem can be set with:  
mount -t tmpfs -o size=800g tmpfs /home

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

DCU Streamer Prefetcher set to Disable

Per Core P-state set to Disable

UPI Prefetcher set to Disable

Stale AtoS set to Enable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0u1/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on SN850 Wed Sep 6 16:15:19 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 16
    physical 0: cores 0 2 3 9 16 19 26 27
    physical 1: cores 0 2 3 9 16 19 26 27
    physical 2: cores 0 2 3 9 16 19 26 27
    physical 3: cores 0 1 2 3 10 11 24 27
cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      1584966216 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux SN850 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 6 16:10
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0u1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  800G  6.9G  794G  1% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

## Platform Notes (Continued)

BIOS Lenovo -[ IVE109A-1.00 ]- 04/27/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u1/lib/ia32:/home/cpu2006-1.2-ic17.0u1/lib/intel64:/home/cpu2006-1.2-ic17.0u1/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Nov-2016

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Nov-2016

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.20 GHz, Intel Xeon Gold 6134)

**SPECint\_rate2006 = 2180**

**SPECint\_rate\_base2006 = 2040**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Oct 13 10:12:55 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 October 2017.