



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

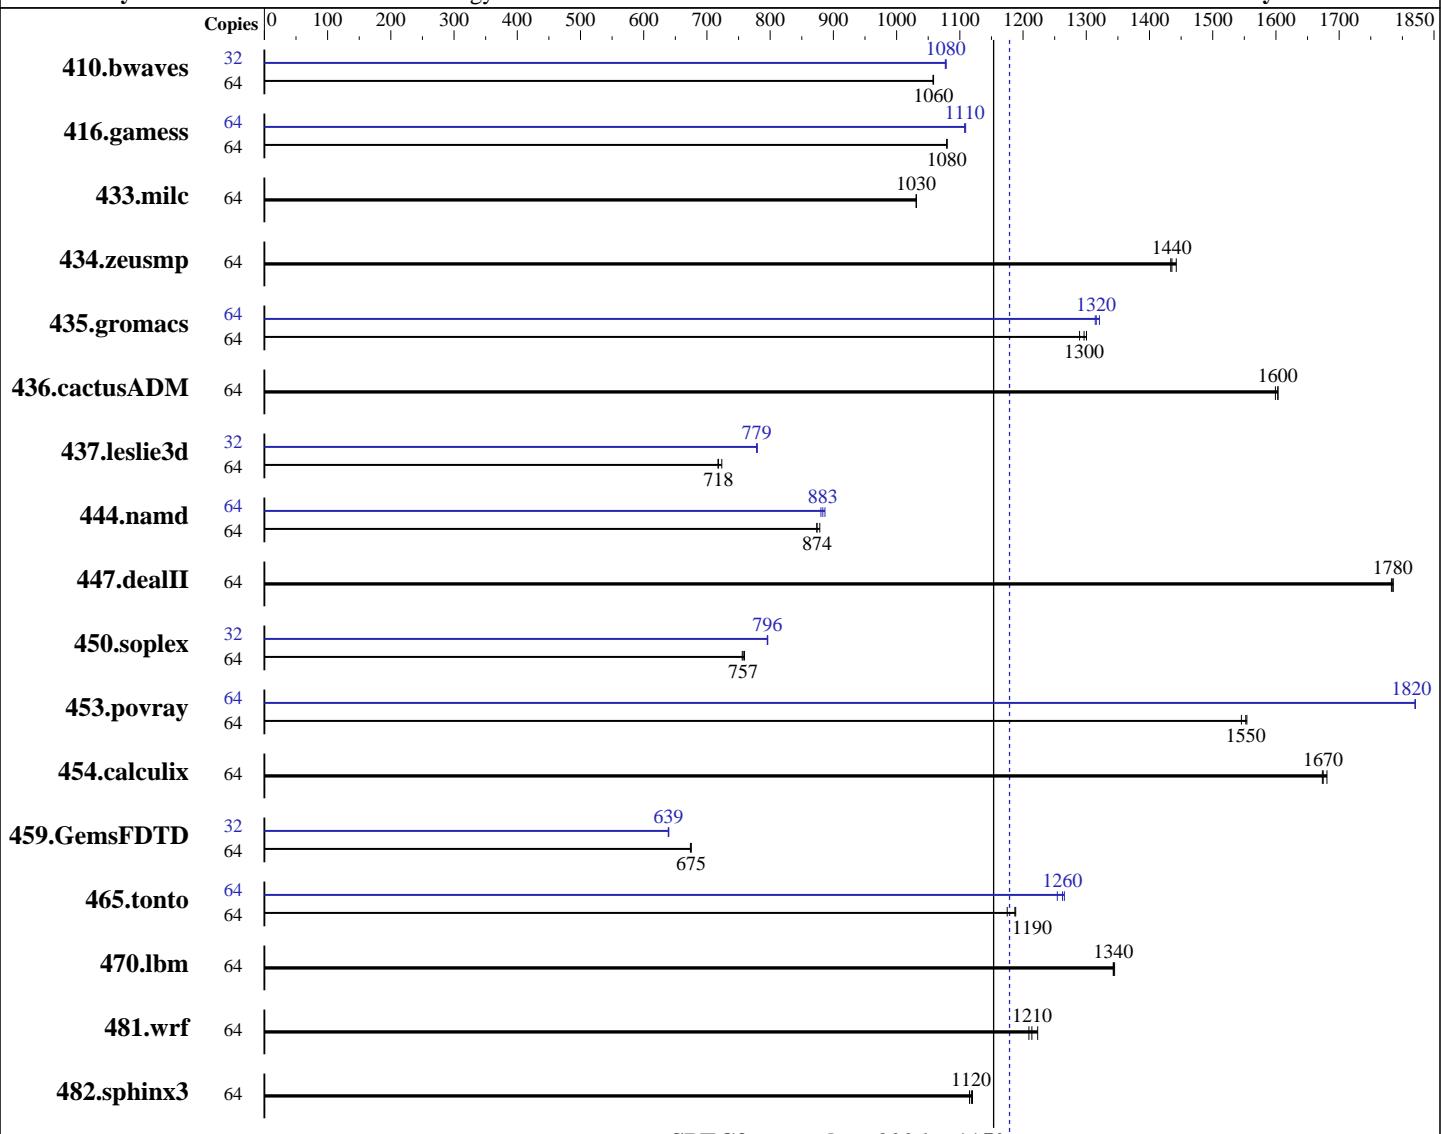

SPECfp_rate_base2006 = 1150

SPECfp_rate2006 = 1180

Hardware

CPU Name: Intel Xeon Platinum 8153
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
Compiler: Kernel 4.4.21-69-default
C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
File System: No
System State: xfs
Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

L3 Cache: 22 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	822	1060	822	1060	822	1060	32	404	1080	403	1080	403	1080
416.gamess	64	1161	1080	1161	1080	1161	1080	64	1131	1110	1130	1110	1131	1110
433.milc	64	570	1030	570	1030	570	1030	64	570	1030	570	1030	570	1030
434.zeusmp	64	404	1440	406	1430	406	1440	64	404	1440	406	1430	406	1440
435.gromacs	64	351	1300	354	1290	352	1300	64	347	1320	346	1320	348	1310
436.cactusADM	64	477	1600	478	1600	477	1600	64	477	1600	478	1600	477	1600
437.leslie3d	64	838	718	838	718	832	723	32	386	779	386	780	386	779
444.namd	64	584	879	587	874	587	874	64	579	887	581	883	583	880
447.dealII	64	410	1780	411	1780	410	1790	64	410	1780	411	1780	410	1790
450.soplex	64	706	756	705	757	703	759	32	335	796	336	795	335	796
453.povray	64	220	1550	219	1550	219	1550	64	187	1820	187	1820	187	1820
454.calculix	64	314	1680	316	1670	315	1670	64	314	1680	316	1670	315	1670
459.GemsFDTD	64	1006	675	1006	675	1008	674	32	531	640	531	639	531	639
465.tonto	64	536	1170	530	1190	531	1190	64	499	1260	502	1250	498	1270
470.lbm	64	655	1340	655	1340	654	1340	64	655	1340	655	1340	654	1340
481.wrf	64	589	1210	584	1220	591	1210	64	589	1210	584	1220	591	1210
482.sphinx3	64	1114	1120	1118	1120	1115	1120	64	1114	1120	1118	1120	1115	1120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance
Execute Disable Bit set to Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

```
DCU Streamer Prefetcher set to Disable
SNC set to Enable
Intel Virtualization Technology set to Disable
LLC dead line alloc set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SN550 Wed Jul 19 06:32:54 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
        2 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      792245424 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux SN550 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 18 18:03
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   687G  64G  624G  10% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[ IVE109A-1.00]- 04/27/2017
Memory:
 24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"
```

```
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-malloc-options=3
 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -auto -inline-calloc
 -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.00 GHz, Intel Xeon Platinum 8153)

SPECfp_rate2006 = 1180

SPECfp_rate_base2006 = 1150

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:40:08 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.