



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

**SPECfp®2006 = 141**

**SPECfp\_base2006 = 137**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

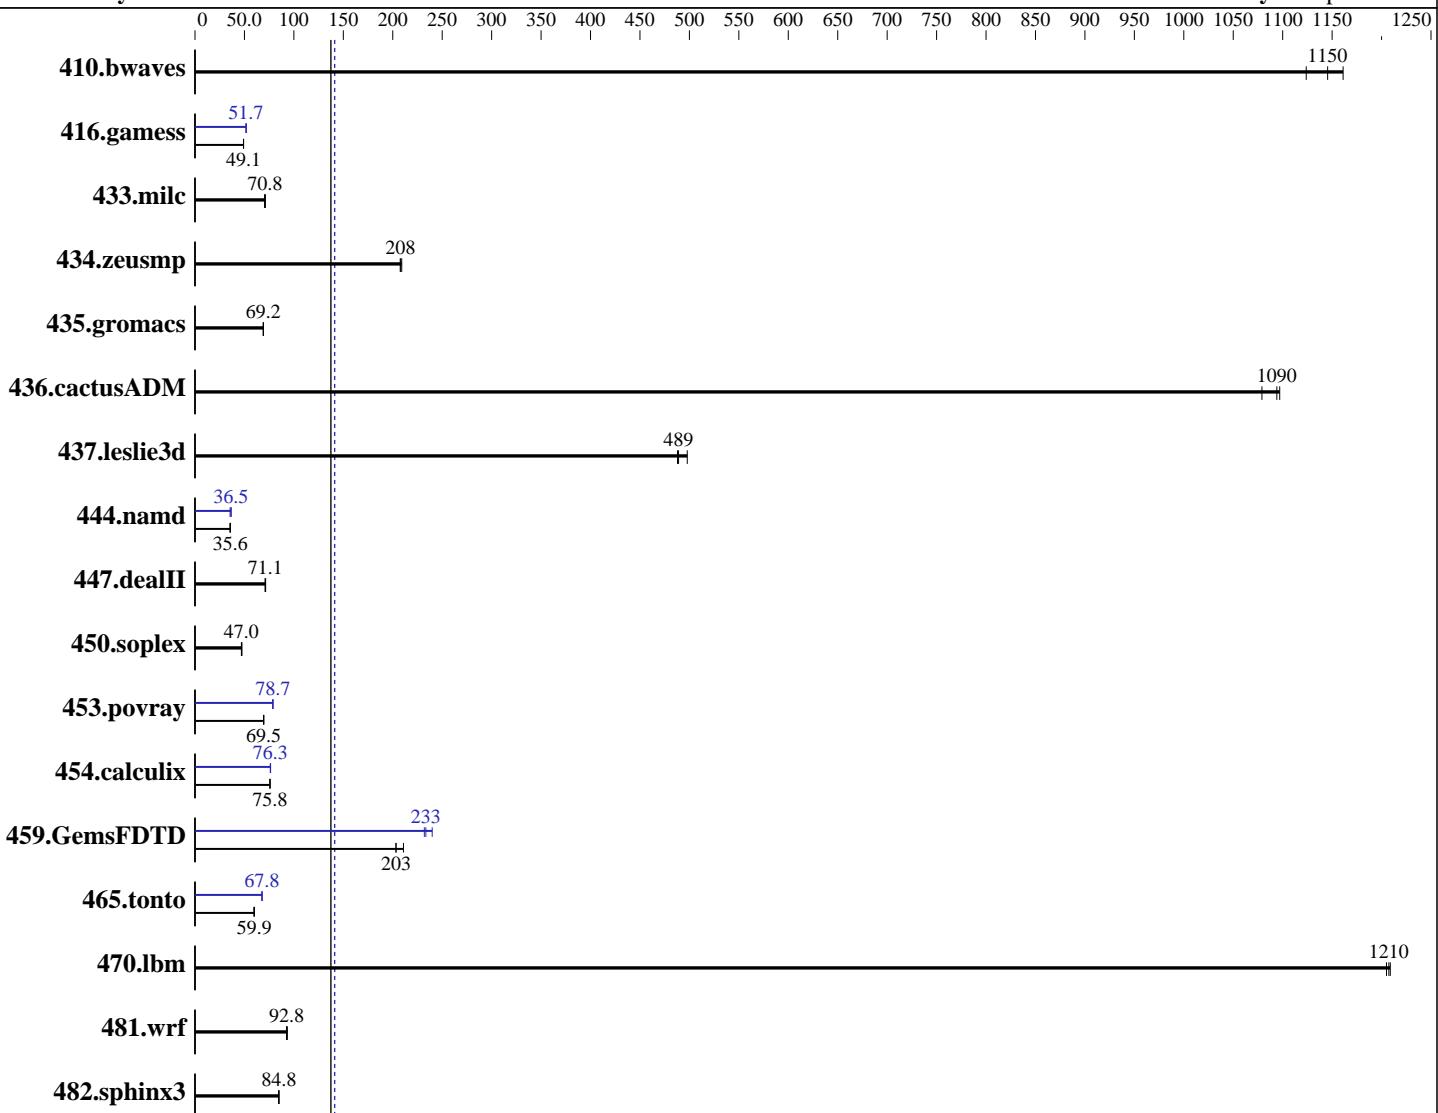

**SPECfp\_base2006 = 137**

**SPECfp2006 = 141**

## Hardware

CPU Name: Intel Xeon Platinum 8156  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

**SPECfp2006 = 141**

**SPECfp\_base2006 = 137**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

L3 Cache: 16.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 900 GB 15K RPM SAS12  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	12.1	1120	<b>11.9</b>	<b>1150</b>	11.7	1160	<b>12.1</b>	<b>1120</b>	<b>11.9</b>	<b>1150</b>	11.7	1160
416.gamess	399	49.0	<b>399</b>	<b>49.1</b>	399	49.1	<b>379</b>	<b>51.7</b>	379	51.7	379	51.7
433.milc	129	71.1	<b>130</b>	<b>70.8</b>	130	70.4	<b>129</b>	<b>71.1</b>	<b>130</b>	<b>70.8</b>	130	70.4
434.zeusmp	43.8	208	43.5	209	<b>43.8</b>	<b>208</b>	43.8	208	43.5	209	<b>43.8</b>	<b>208</b>
435.gromacs	103	69.2	103	69.0	<b>103</b>	<b>69.2</b>	103	69.2	103	69.0	<b>103</b>	<b>69.2</b>
436.cactusADM	10.9	1100	<b>10.9</b>	<b>1090</b>	11.1	1080	10.9	1100	<b>10.9</b>	<b>1090</b>	11.1	1080
437.leslie3d	<b>19.2</b>	<b>489</b>	18.9	498	19.3	488	<b>19.2</b>	<b>489</b>	18.9	498	19.3	488
444.namd	<b>225</b>	<b>35.6</b>	225	35.6	225	35.6	220	36.5	226	35.5	<b>220</b>	<b>36.5</b>
447.dealII	161	71.0	160	71.5	<b>161</b>	<b>71.1</b>	161	71.0	160	71.5	<b>161</b>	<b>71.1</b>
450.soplex	178	47.0	<b>177</b>	<b>47.0</b>	176	47.5	<b>178</b>	<b>47.0</b>	<b>177</b>	<b>47.0</b>	176	47.5
453.povray	76.7	69.4	76.5	69.5	<b>76.6</b>	<b>69.5</b>	67.5	78.9	67.6	78.7	<b>67.6</b>	<b>78.7</b>
454.calculix	109	75.9	<b>109</b>	<b>75.8</b>	109	75.8	108	<b>76.5</b>	108	76.2	<b>108</b>	<b>76.3</b>
459.GemsFDTD	50.3	211	<b>52.2</b>	<b>203</b>	52.2	203	<b>45.7</b>	232	44.2	240	<b>45.4</b>	<b>233</b>
465.tonto	<b>164</b>	<b>59.9</b>	165	59.6	164	60.1	<b>145</b>	<b>67.7</b>	<b>145</b>	<b>67.8</b>	145	67.8
470.lbm	<b>11.4</b>	<b>1210</b>	11.4	1210	11.4	1200	<b>11.4</b>	<b>1210</b>	11.4	1210	11.4	1200
481.wrf	<b>120</b>	<b>92.8</b>	120	93.4	121	92.5	<b>120</b>	<b>92.8</b>	120	93.4	121	92.5
482.sphinx3	229	85.0	230	84.6	<b>230</b>	<b>84.8</b>	<b>229</b>	<b>85.0</b>	230	84.6	<b>230</b>	<b>84.8</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Logical Processor Disabled  
Virtualization Technology Disabled  
Sub NUMA Cluster Disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C1E Disabled  
C States set to Autonomous  
Uncore Frequency set to Dynamic  
Memory Patrol Scrub Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

SPECfp2006 =

141

SPECfp\_base2006 =

137

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Platform Notes (Continued)

Energy Efficiency Policy set to Performance  
CPU Interconnect Bus Link Power Management Disabled  
PCI ASPM L1 Link Power Management Disabled  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-2h8y Sun Oct 15 12:21:38 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8156 CPU @ 3.60GHz
        4 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 1 5 9 13
physical 1: cores 1 5 9 13
physical 2: cores 0 5 9 13
physical 3: cores 0 3 10 13
cache size : 16896 KB
```

```
From /proc/meminfo
MemTotal:      791225344 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

**SPECfp2006 =**

**141**

**SPECfp\_base2006 =**

**137**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
Linux linux-2h8y 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 15 07:56
```

```
SPEC is set to: /home/cpu2006
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   796G   17G  779G   3% /home
```

```
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS Dell Inc. 1.1.7 08/10/2017
```

```
Memory:
```

```
48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz
```

```
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

**SPECfp2006 =**

**141**

**SPECfp\_base2006 =**

**137**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:**

Oct-2017

**Hardware Availability:**

Jul-2017

**Software Availability:**

Apr-2017

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

SPECfp2006 =

141

SPECfp\_base2006 =

137

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date:

Oct-2017

Hardware Availability:

Jul-2017

Software Availability:

Apr-2017

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8156, 3.60 GHz)

**SPECfp2006 =** 141

**SPECfp\_base2006 =** 137

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:58:42 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.