SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8153, 2.00 GHz)

SPECint®_rate2006 = 2810

SPECint_rate_base2006 = 2640

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

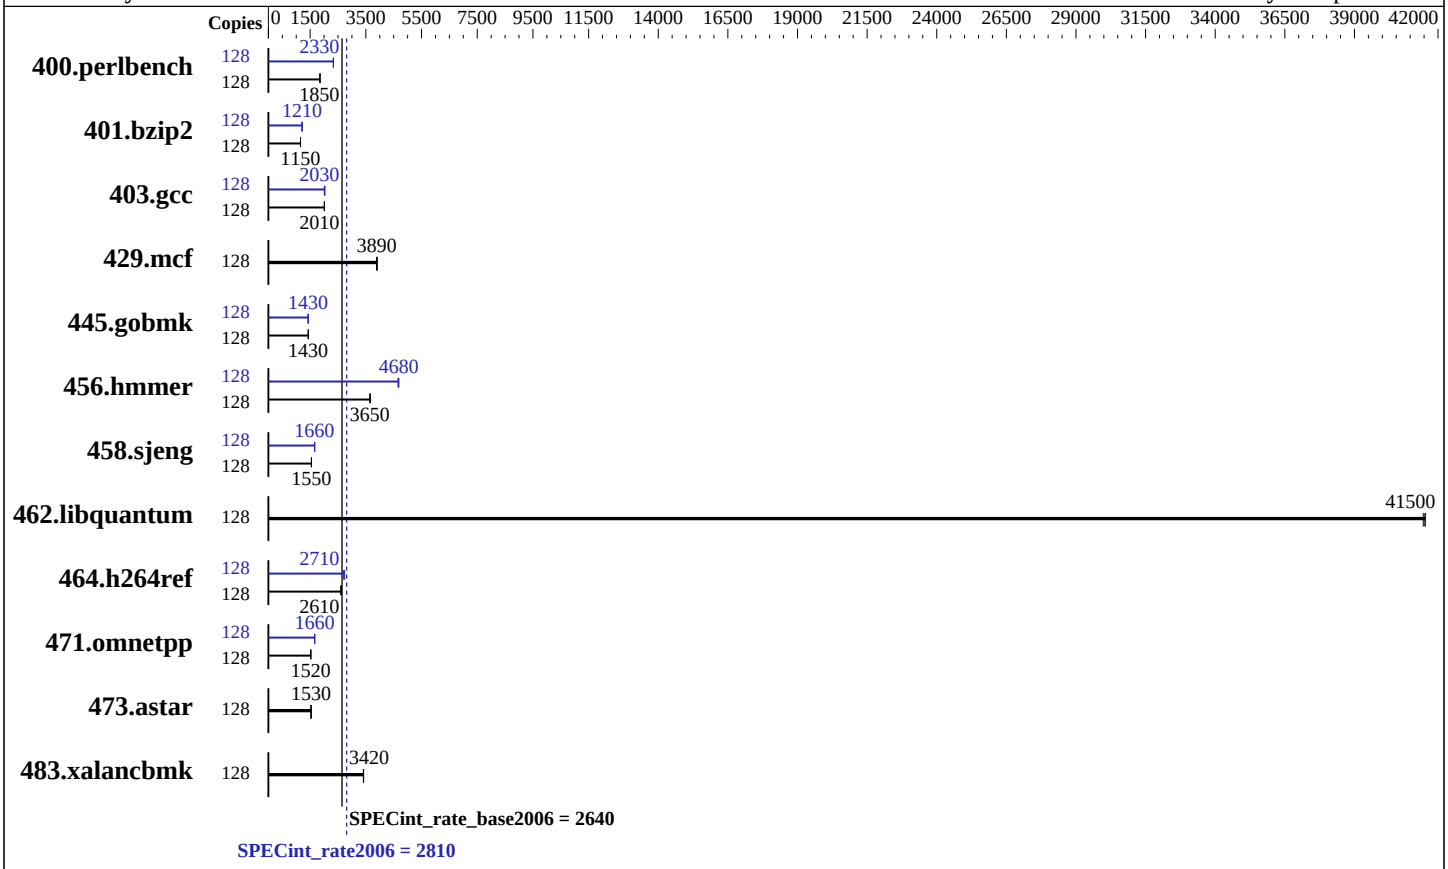

Hardware

CPU Name:	Intel Xeon Platinum 8153
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	64 cores, 4 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	22 MB I+D on chip per chip
Other Cache:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem:	1 x 900 GB 15K RPM SAS12
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8153, 2.00 GHz)

SPECint_rate2006 = 2810

SPECint_rate_base2006 = 2640

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	**675**	**1850**	675	1850	675	1850	128	536	2330	535	2340	**536**	**2330**
401.bzip2	128	1071	1150	1070	1150	**1071**	**1150**	128	1024	1210	1016	1220	**1022**	**1210**
403.gcc	128	513	2010	**512**	**2010**	512	2010	128	513	2010	508	2030	**509**	**2030**
429.mcf	128	300	3880	**300**	**3890**	298	3910	128	300	3880	**300**	**3890**	298	3910
445.gobmk	128	937	1430	936	1430	**936**	**1430**	128	941	1430	**940**	**1430**	939	1430
456.hmmer	128	328	3640	**327**	**3650**	326	3660	128	**255**	**4680**	255	4680	257	4650
458.sjeng	128	**1002**	**1550**	1002	1550	1003	1540	128	**932**	**1660**	931	1660	933	1660
462.libquantum	128	**63.9**	**41500**	64.0	41500	63.8	41500	128	**63.9**	**41500**	64.0	41500	63.8	41500
464.h264ref	128	**1085**	**2610**	1090	2600	1082	2620	128	**1045**	**2710**	1047	2700	1034	2740
471.omnetpp	128	526	1520	**526**	**1520**	524	1530	128	**481**	**1660**	481	1660	481	1660
473.astar	128	**586**	**1530**	585	1540	587	1530	128	**586**	**1530**	585	1540	587	1530
483.xalancbmk	128	258	3420	259	3410	**258**	**3420**	128	258	3420	259	3410	**258**	**3420**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Kernel boot parameter: nohz_full=1-127
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Logical Processor Enabled
Virtualization Technology Disabled
Sub NUMA Cluster Enabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C1E Disabled
C States set to Autonomous
Uncore Frequency set to Dynamic
Memory Patrol Scrub Disabled
Energy Efficiency Policy set to Performance
CPU Interconnect Bus Link Power Management Disabled
PCI ASPM L1 Link Power Management Disabled
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-4qdv Tue Oct 17 21:24:08 2017
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
      4 "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   cache size : 22528 KB

From /proc/meminfo
   MemTotal:       791224272 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-4qdv 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 17 21:23

SPEC is set to: /home/cpu2006
```

Continued on next page

Platform Notes (Continued)

```
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   796G   17G  779G   3% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Dell Inc. 1.1.7 08/10/2017
    Memory:
     3x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz
     21x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz
     24x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

  Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
  memory using Redhat Enterprise Linux 7.2
  Transparent Huge Pages enabled by default
  Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX512`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2)
`-qopt-ra-region-strategy=block`
`-qopt-mem-layout-trans=3 -Wl,-z,muldefs`
`-L/sh10.2 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 15 10:58:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2017.