SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp®_rate2006 = 1390

SPECfp_rate_base2006 = 1350

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2017

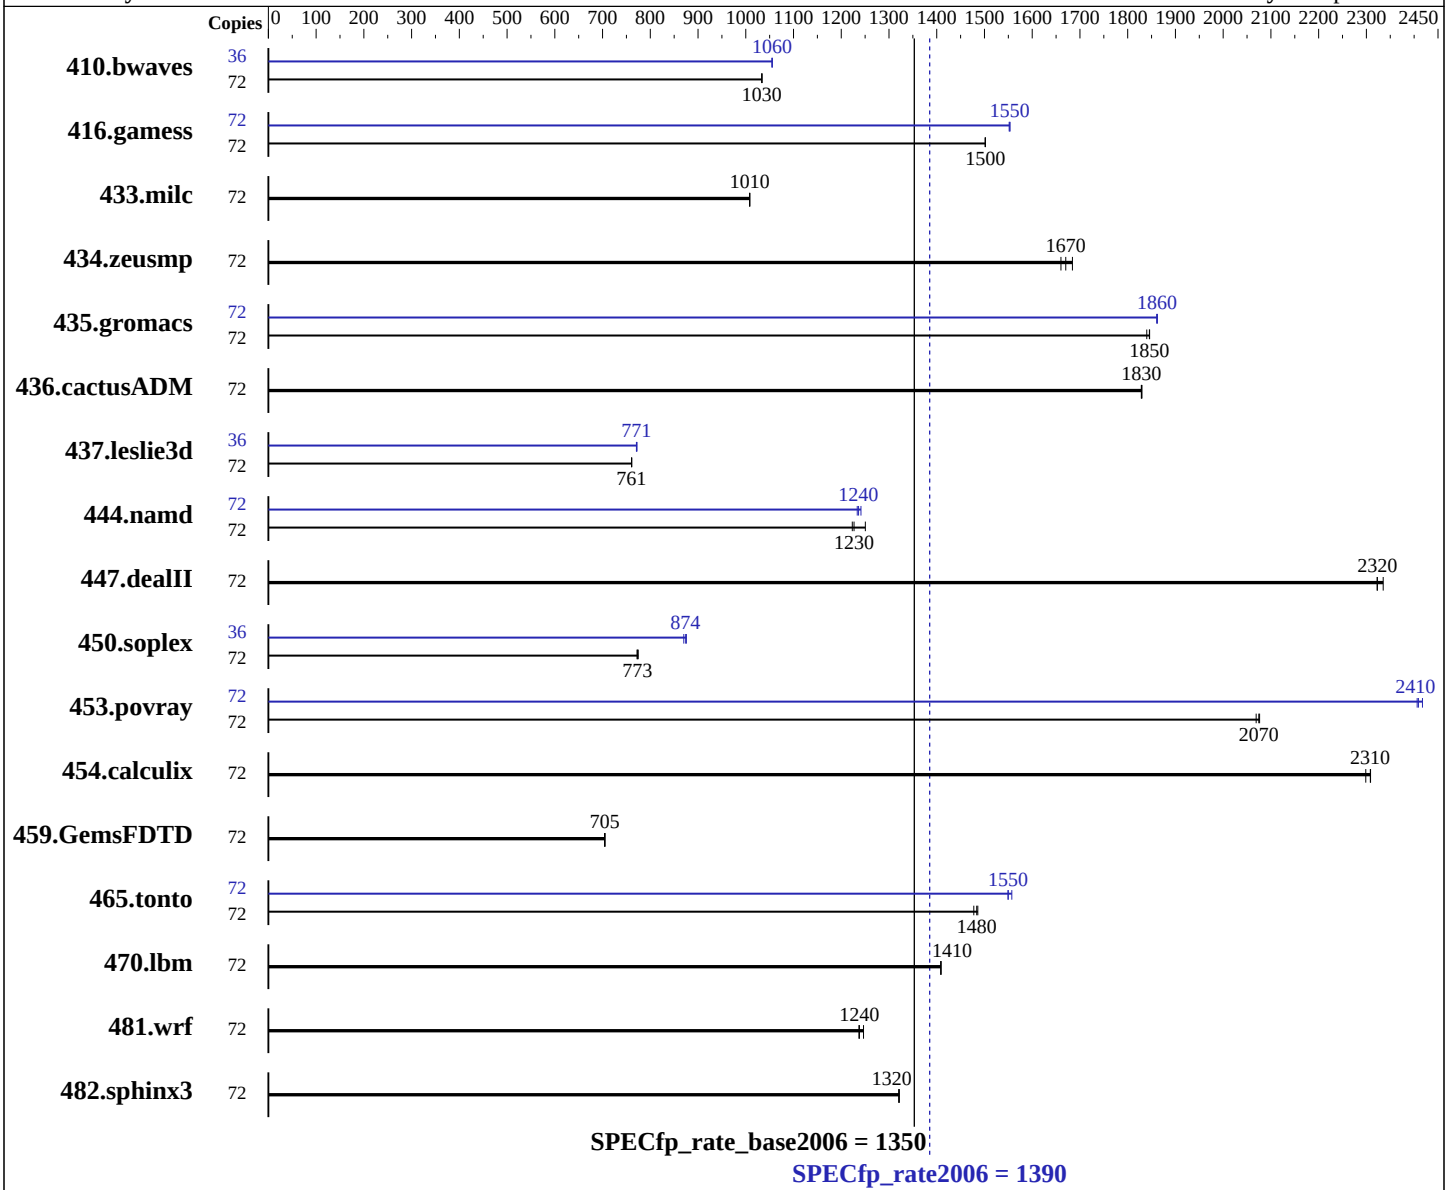

Hardware

CPU Name:	Intel Xeon Gold 6140
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp_rate2006 = 1390

SPECfp_rate_base2006 = 1350

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 2 x 600 GB 10 K SAS HDD, RAID 1
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	**947**	**1030**	946	1030	947	1030	36	464	1060	464	1050	**464**	**1060**
416.gamess	72	939	1500	939	1500	**939**	**1500**	72	908	1550	**908**	**1550**	909	1550
433.milc	72	656	1010	**656**	**1010**	655	1010	72	656	1010	**656**	**1010**	655	1010
434.zeusmp	72	395	1660	389	1680	**392**	**1670**	72	395	1660	389	1680	**392**	**1670**
435.gromacs	72	**279**	**1850**	278	1850	279	1840	72	**276**	**1860**	276	1860	276	1860
436.cactusADM	72	471	1830	**470**	**1830**	470	1830	72	471	1830	**470**	**1830**	470	1830
437.leslie3d	72	**889**	**761**	890	761	889	761	36	438	772	439	771	**439**	**771**
444.namd	72	462	1250	472	1220	**471**	**1230**	72	468	1230	**467**	**1240**	465	1240
447.dealII	72	353	2340	**355**	**2320**	355	2320	72	353	2340	**355**	**2320**	355	2320
450.soplex	72	778	772	**777**	**773**	775	775	36	345	870	343	876	**343**	**874**
453.povray	72	184	2080	185	2070	**185**	**2070**	72	**159**	**2410**	159	2410	158	2420
454.calculix	72	**257**	**2310**	257	2310	258	2300	72	**257**	**2310**	257	2310	258	2300
459.GemsFDTD	72	1085	704	1083	705	**1084**	**705**	72	1085	704	1083	705	**1084**	**705**
465.tonto	72	479	1480	**477**	**1480**	477	1490	72	457	1550	**457**	**1550**	455	1560
470.lbm	72	702	1410	**702**	**1410**	702	1410	72	702	1410	**702**	**1410**	702	1410
481.wrf	72	**650**	**1240**	645	1250	650	1240	72	**650**	**1240**	645	1250	650	1240
482.sphinx3	72	**1062**	**1320**	1063	1320	1062	1320	72	**1062**	**1320**	1063	1320	1062	1320

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 Memory Patrol Scrubbing set to Disabled
 LLC Prefetcher set to Enabled
 LLC Dead Line Allocation set to Disabled
 Workload Pofile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on pl15 Wed Oct 25 13:47:22 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
      2 "physical id"s (chips)
      72 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 25344 KB

From /proc/meminfo
   MemTotal:       395922428 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
```

Continued on next page

Platform Notes (Continued)

```
      Linux pl15 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Oct 20 07:38

   SPEC is set to: /cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      xfs   559G  214G  345G  39% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS HPE U30 09/29/2017
     Memory:
      24x HPE 840756-091 16 GB 2 rank 2666 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 15 10:59:32 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2017.