# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6128, 3.40 GHz)

SPECfp®2006 = 151

SPECfp_base2006 = 146

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Oct-2017
**Hardware Availability:** Sep-2017
**Software Availability:** Apr-2017

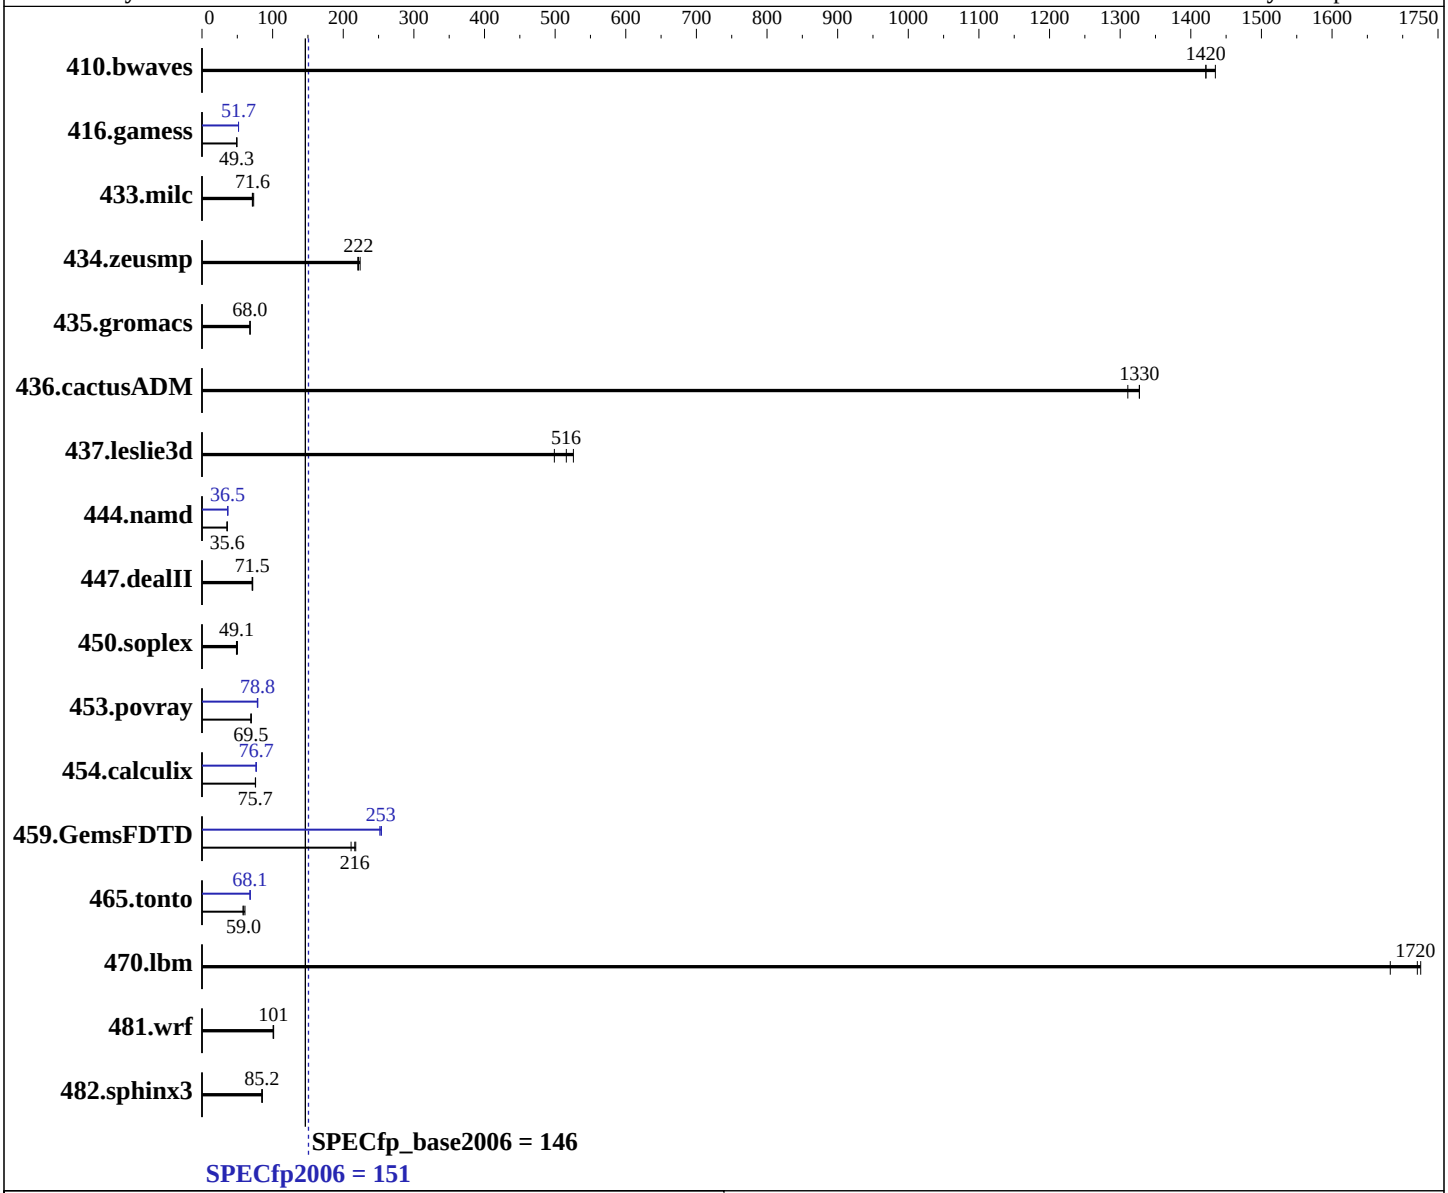


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6128 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.70 GHz |
| CPU MHz: | 3400 |
| FPU: | Integrated |
| CPU(s) enabled: | 24 cores, 4 chips, 6 cores/chip |
| CPU(s) orderable: | 2,4 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 1 MB I+D on chip per core |

Continued on next page

## Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 (x86_64) SP2<br>4.4.21-69-default |
| Compiler: | C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux |
| Auto Parallel: | Yes |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6128, 3.40 GHz)

SPECfp2006 = 151

SPECfp_base2006 = 146

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Oct-2017
**Hardware Availability:** Sep-2017
**Software Availability:** Apr-2017

L3 Cache: 19.25 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 900 GB 15K RPM SAS12
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | **9.56** | **1420** | 9.47 | 1430 | 9.56 | 1420 | **9.56** | **1420** | 9.47 | 1430 | 9.56 | 1420 |
| 416.gamess | **398** | **49.3** | 397 | 49.3 | 398 | 49.1 | 379 | 51.7 | 379 | 51.7 | **379** | **51.7** |
| 433.milc | **128** | **71.6** | 125 | 73.2 | 129 | 71.3 | **128** | **71.6** | 125 | 73.2 | 129 | 71.3 |
| 434.zeusmp | 40.6 | 224 | **41.1** | **222** | 41.3 | 221 | 40.6 | 224 | **41.1** | **222** | 41.3 | 221 |
| 435.gromacs | **105** | **68.0** | 105 | 67.9 | 105 | 68.1 | **105** | **68.0** | 105 | 67.9 | 105 | 68.1 |
| 436.cactusADM | 9.12 | 1310 | **9.00** | **1330** | 9.00 | 1330 | 9.12 | 1310 | **9.00** | **1330** | 9.00 | 1330 |
| 437.leslie3d | **18.2** | **516** | 17.9 | 526 | 18.8 | 499 | **18.2** | **516** | 17.9 | 526 | 18.8 | 499 |
| 444.namd | **225** | **35.6** | 225 | 35.6 | 225 | 35.6 | 220 | 36.4 | 220 | 36.5 | **220** | **36.5** |
| 447.dealII | **160** | **71.5** | 159 | 71.8 | 161 | 71.0 | **160** | **71.5** | 159 | 71.8 | 161 | 71.0 |
| 450.soplex | 166 | 50.2 | **170** | **49.1** | 171 | 48.8 | 166 | 50.2 | **170** | **49.1** | 171 | 48.8 |
| 453.povray | 76.9 | 69.2 | 76.3 | 69.8 | **76.5** | **69.5** | **67.6** | **78.8** | 67.4 | 78.9 | 67.9 | 78.3 |
| 454.calculix | 109 | 75.9 | **109** | **75.7** | 109 | 75.6 | **108** | **76.7** | 107 | 76.9 | 108 | 76.6 |
| 459.GemsFDTD | **49.1** | **216** | 50.3 | 211 | 48.7 | 218 | 42.1 | 252 | 41.8 | 254 | **41.9** | **253** |
| 465.tonto | 162 | 60.8 | 170 | 58.0 | **167** | **59.0** | 144 | 68.1 | 144 | 68.1 | **144** | **68.1** |
| 470.lbm | **7.98** | **1720** | 7.96 | 1730 | 8.17 | 1680 | **7.98** | **1720** | 7.96 | 1730 | 8.17 | 1680 |
| 481.wrf | 111 | 101 | **111** | **101** | 110 | 101 | 111 | 101 | **111** | **101** | 110 | 101 |
| 482.sphinx3 | 230 | 84.7 | 228 | 85.4 | **229** | **85.2** | 230 | 84.7 | 228 | 85.4 | **229** | **85.2** |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS settings:
Logical Processor Disabled
Virtualization Technology Disabled
Sub NUMA Cluster Disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C1E Disabled
C States set to Autonomous
Uncore Frequency set to Dynamic
Memory Patrol Scrub Disabled
```

Continued on next page

## Platform Notes (Continued)

```
Energy Efficiency Policy set to Performance
CPU Interconnect Bus Link Power Management Disabled
PCI ASPM L1 Link Power Management Disabled
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-4qdv Wed Oct 25 14:19:58 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz
      4 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 6
      physical 0: cores 0 6 9 10 11 13
      physical 1: cores 0 6 9 10 11 13
      physical 2: cores 0 6 9 10 11 13
      physical 3: cores 0 6 9 10 11 13
   cache size : 19712 KB

From /proc/meminfo
   MemTotal:       791225340 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
```

Continued on next page

## Platform Notes (Continued)

```
     Linux linux-4qdv 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Oct 25 09:56

  SPEC is set to: /home/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   796G   17G  779G   3% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Dell Inc. 1.1.7 08/10/2017
    Memory:
     3x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz
     21x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz
     24x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"
OMP_NUM_THREADS = "24"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages disabled with:
 echo never  > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

# Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Continued on next page

## Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page

# Peak Optimization Flags (Continued)

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll2 -inline-level=0 -qopt-prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-inline-calloc -qopt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revD.20171221.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revD.20171221.xml`


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 21 17:10:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2017.