



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.80 GHz, Intel Xeon Silver 4108)

**SPECfp®2006 =**

**Not Run**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

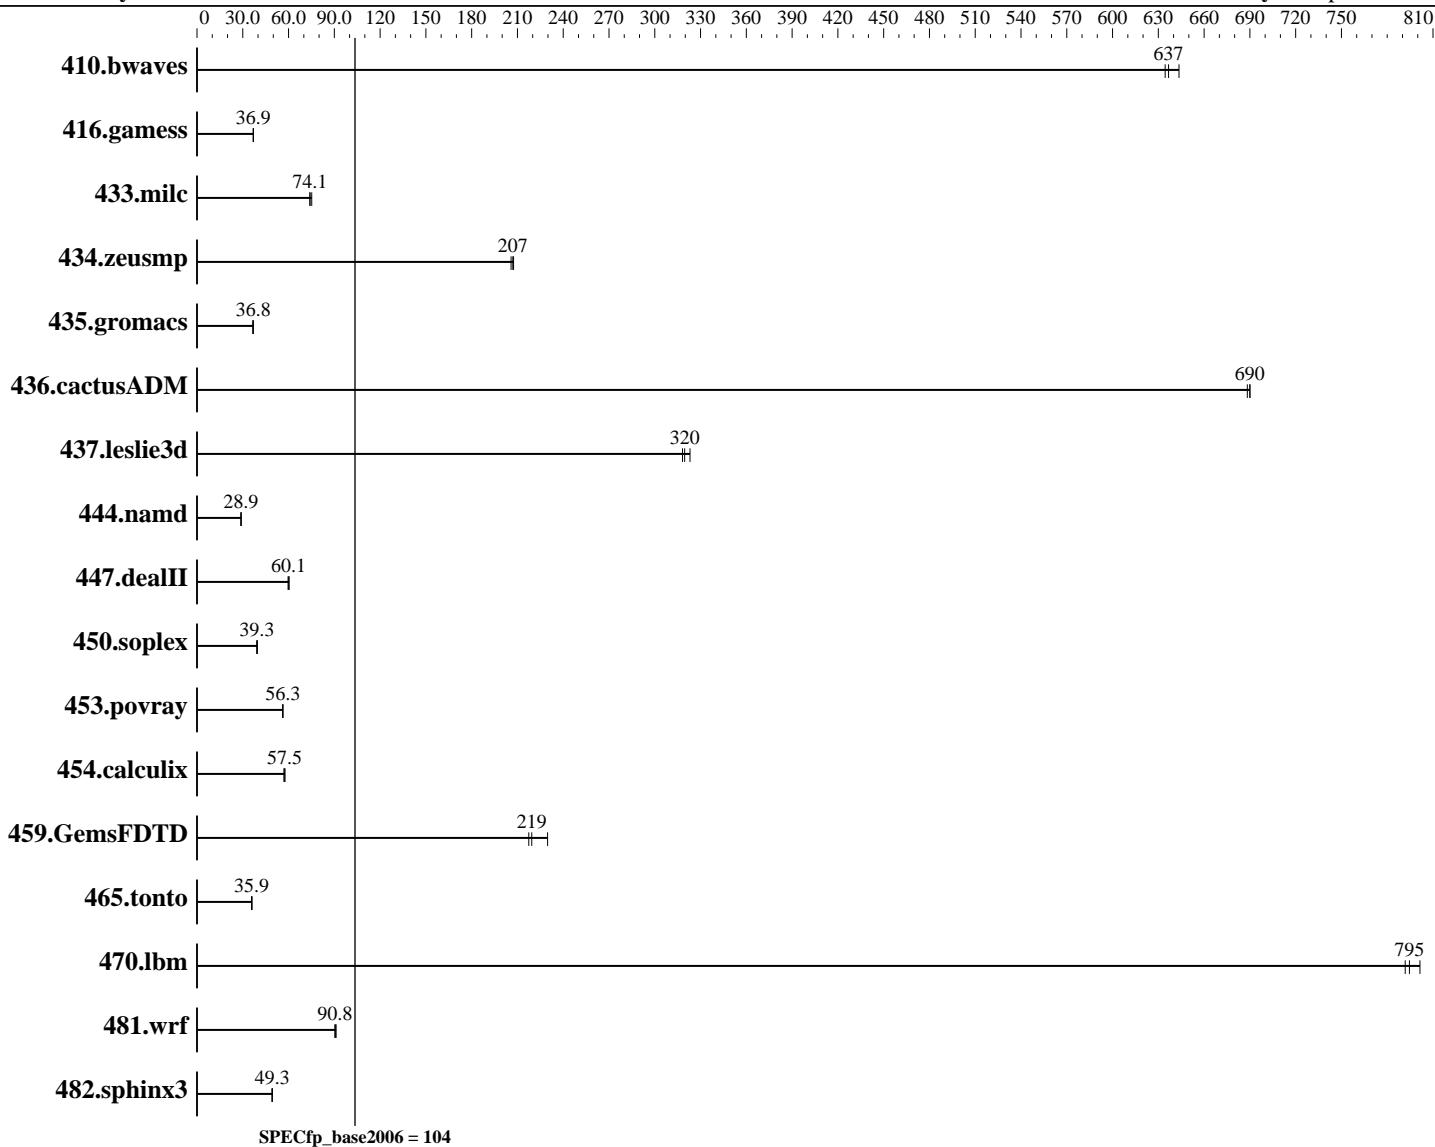

## Hardware

CPU Name: Intel Xeon Silver 4108  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo), Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.80 GHz, Intel Xeon Silver 4108)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

L3 Cache: 11 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R,  
 running at 2400)  
 Disk Subsystem: 1 x 600 GB SATA SSD, RAID 0  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>21.3</b>	<b>637</b>	21.1	644	21.4	634						
416.gamess	531	36.9	<b>530</b>	<b>36.9</b>	530	36.9						
433.milc	124	74.0	<b>124</b>	<b>74.1</b>	122	75.2						
434.zeusmp	43.9	207	<b>44.0</b>	<b>207</b>	44.2	206						
435.gromacs	195	36.6	194	36.8	<b>194</b>	<b>36.8</b>						
436.cactusADM	17.4	688	17.3	690	<b>17.3</b>	<b>690</b>						
437.leslie3d	29.1	323	29.5	318	<b>29.4</b>	<b>320</b>						
444.namd	278	28.9	278	28.9	<b>278</b>	<b>28.9</b>						
447.dealII	192	59.7	190	60.4	<b>190</b>	<b>60.1</b>						
450.soplex	213	39.2	<b>212</b>	<b>39.3</b>	211	39.5						
453.povray	94.7	56.2	<b>94.5</b>	<b>56.3</b>	94.5	56.3						
454.calculix	145	56.9	<b>143</b>	<b>57.5</b>	143	57.6						
459.GemsFDTD	<b>48.4</b>	<b>219</b>	48.8	217	46.2	230						
465.tonto	273	36.1	<b>274</b>	<b>35.9</b>	275	35.7						
470.lbm	17.1	801	17.4	792	<b>17.3</b>	<b>795</b>						
481.wrf	<b>123</b>	<b>90.8</b>	123	91.1	124	90.3						
482.sphinx3	<b>395</b>	<b>49.3</b>	396	49.2	395	49.3						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

irqbalance disabled with "systemctl stop irqbalance"

tuned profile set with "tuned-adm profile throughput-performance"

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.80 GHz, Intel Xeon Silver 4108)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

Uncore Frequency scaling set to Auto

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on DL360G10 Thu Nov 9 04:48:18 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4108 CPU @ 1.80GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings   : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 11264 KB
```

```
From /proc/meminfo
MemTotal:      197752264 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux DL360G10 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.80 GHz, Intel Xeon Silver 4108)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:**

Oct-2017

**Software Availability:**

Apr-2017

## Platform Notes (Continued)

run-level 3 Nov 9 01:51

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel_dl360g10-home	xfs	504G	37G	467G	8%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U32 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=core,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.80 GHz, Intel Xeon Silver 4108)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:**

Oct-2017

**Software Availability:**

Apr-2017

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.80 GHz, Intel Xeon Silver 4108)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 29 12:30:06 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 November 2017.