# SPEC® CFP2006 Result



## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(3.00 GHz, Intel Xeon Platinum 8158)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1180

| | | | |
|---|---|---|---|
| **CPU2006 license:** 3 | | **Test date:** | Nov-2017 |
| **Test sponsor:** | HPE | **Hardware Availability:** | Oct-2017 |
| **Tested by:** | HPE | **Software Availability:** | Sep-2017 |

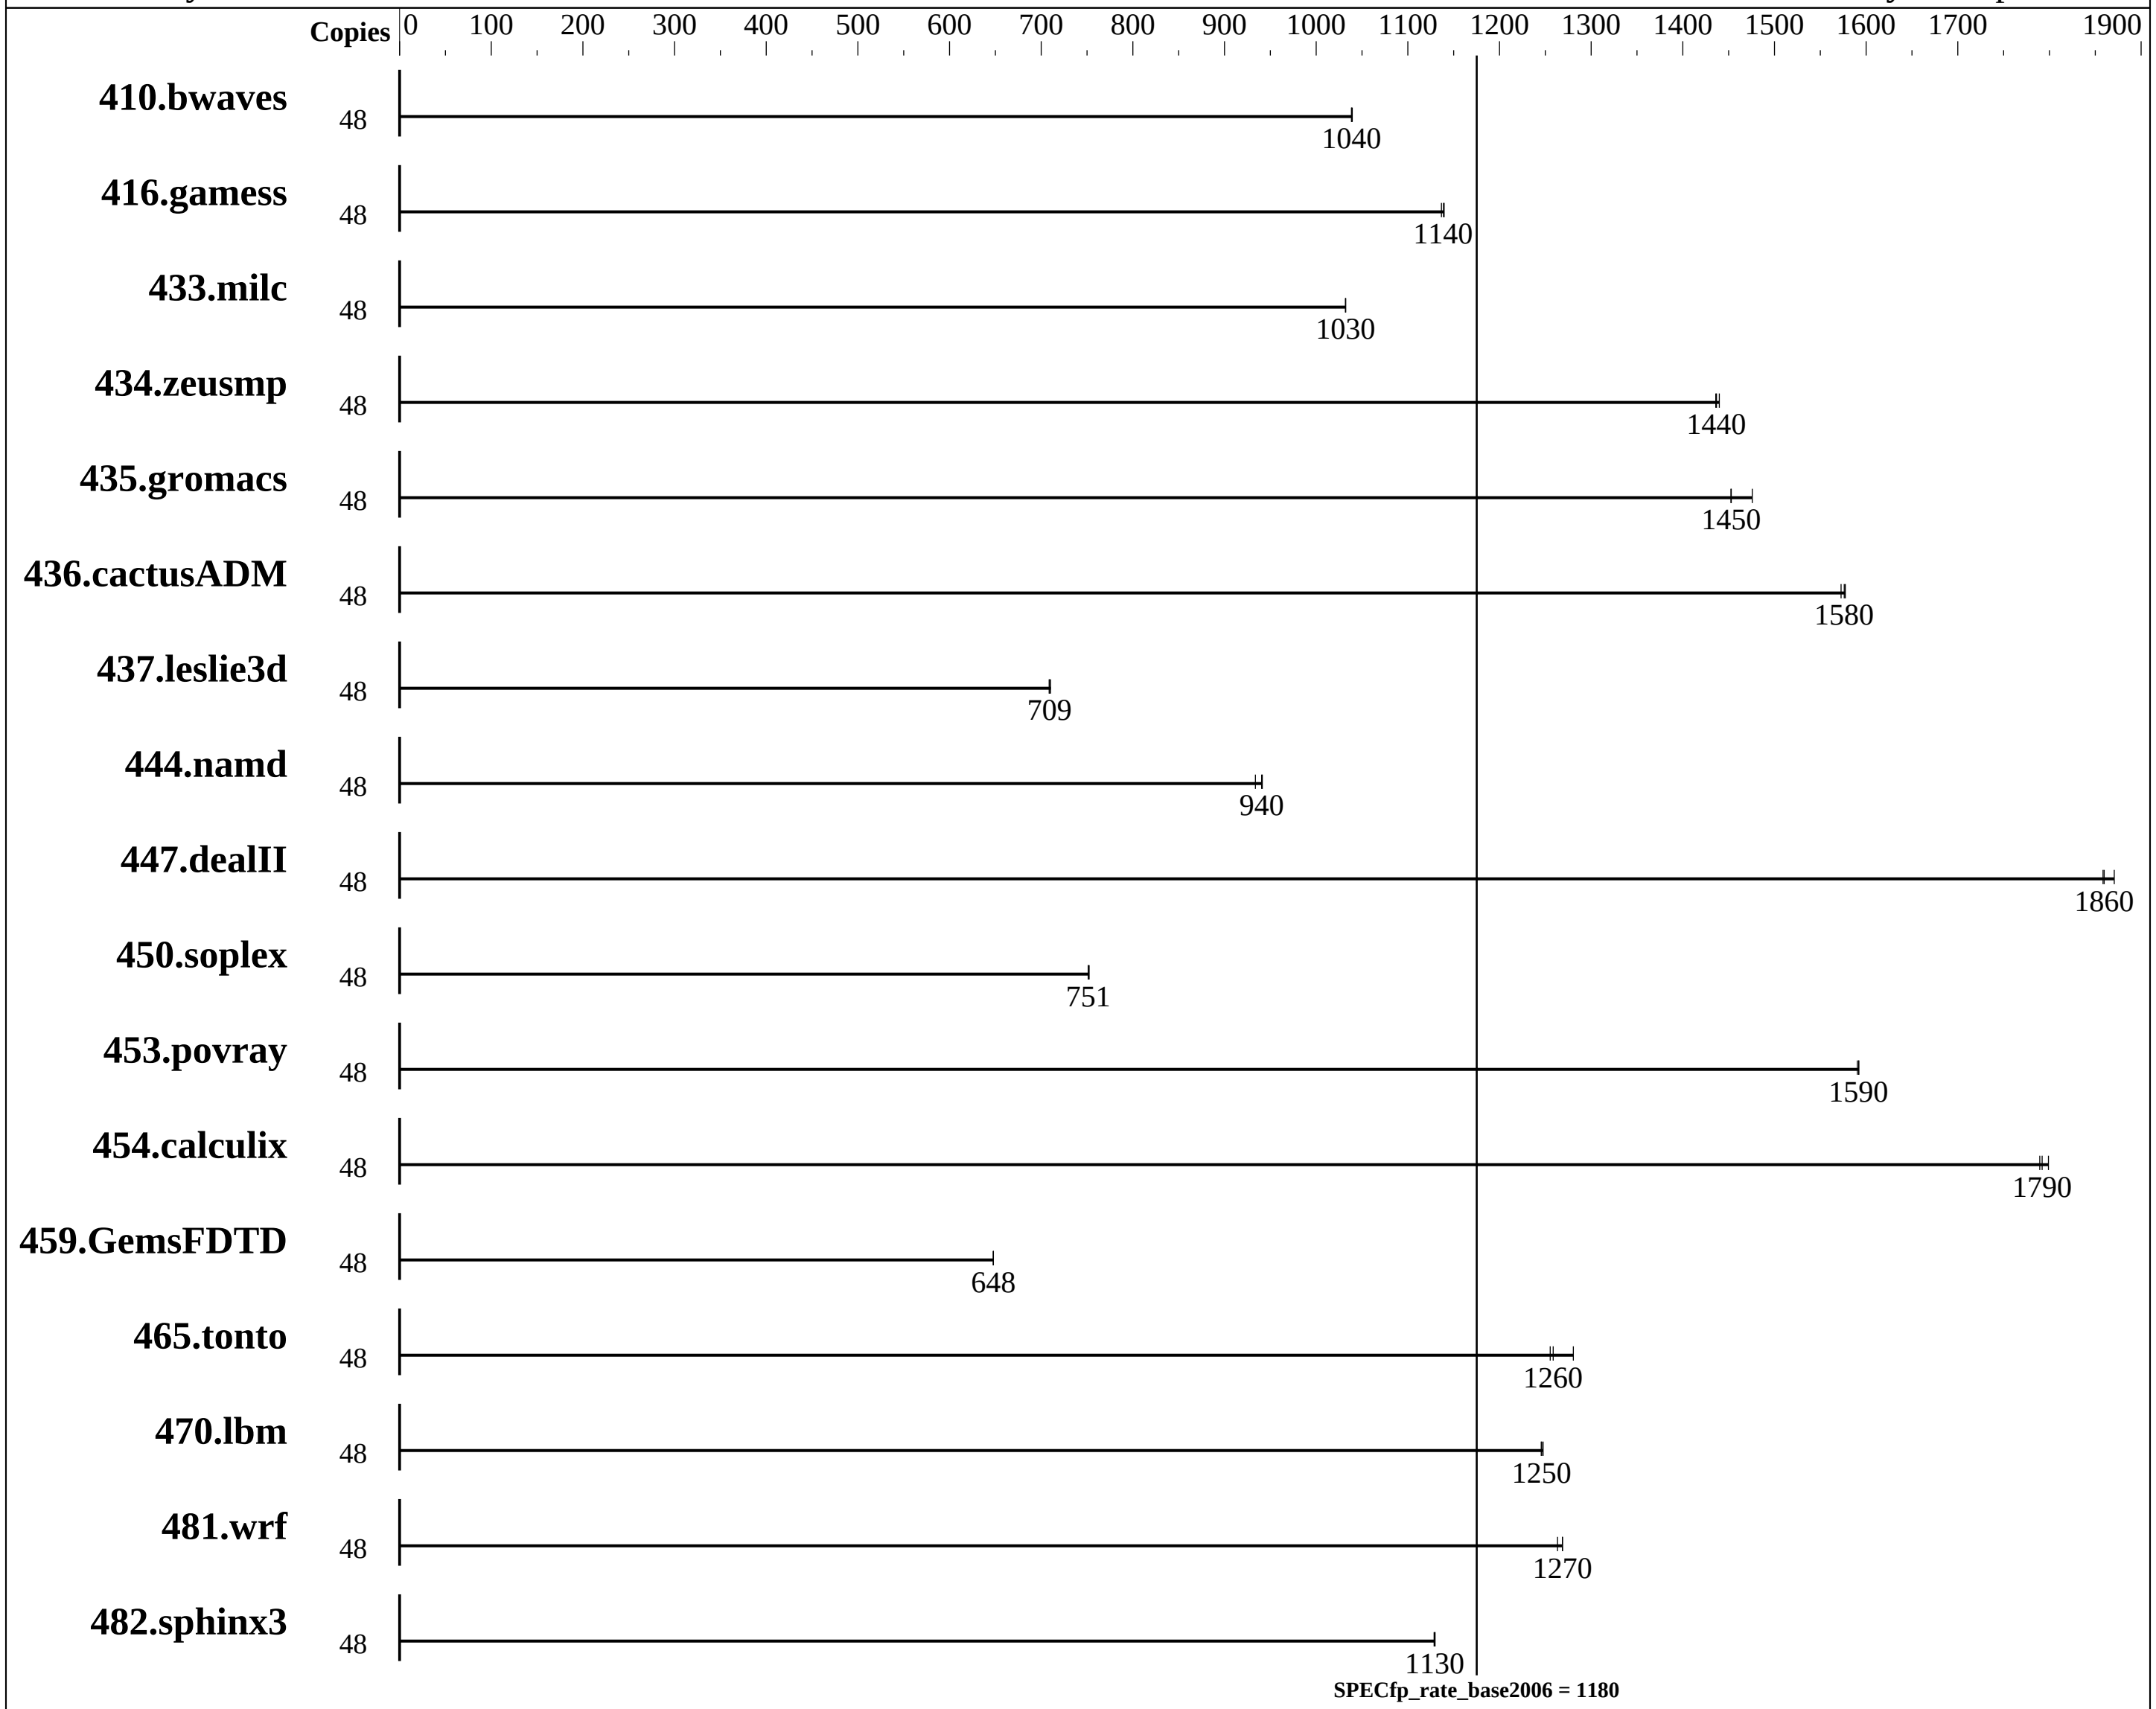


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8158 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.70 GHz |
| CPU MHz: | 3000 |
| FPU: | Integrated |
| CPU(s) enabled: | 24 cores, 2 chips, 12 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1, 2 chip(s) |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 1 MB I+D on chip per core |

Continued on next page

## Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-68-default |
| Compiler: | C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux |
| Auto Parallel: | No |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |

Continued on next page

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL360 Gen10
(3.00 GHz, Intel Xeon Platinum 8158)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1180

**CPU2006 license:** 3
**Test sponsor:** HPE
**Tested by:** HPE

**Test date:** Nov-2017
**Hardware Availability:** Oct-2017
**Software Availability:** Sep-2017

L3 Cache: 24.75 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 400 GB SATA SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

## Results Table

| | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Benchmark | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 48 | 628 | 1040 | 628 | 1040 | **628** | **1040** | | | | | | | |
| 416.gamess | 48 | 825 | 1140 | 827 | 1140 | **825** | **1140** | | | | | | | |
| 433.milc | 48 | 427 | 1030 | 427 | 1030 | **427** | **1030** | | | | | | | |
| 434.zeusmp | 48 | 303 | 1440 | **304** | **1440** | 304 | 1440 | | | | | | | |
| 435.gromacs | 48 | **236** | **1450** | 232 | 1480 | 236 | 1450 | | | | | | | |
| 436.cactusADM | 48 | 365 | 1570 | **364** | **1580** | 364 | 1580 | | | | | | | |
| 437.leslie3d | 48 | **636** | **709** | 637 | 709 | 635 | 710 | | | | | | | |
| 444.namd | 48 | 409 | 941 | 412 | 934 | **409** | **940** | | | | | | | |
| 447.dealII | 48 | **295** | **1860** | 294 | 1870 | 295 | 1860 | | | | | | | |
| 450.soplex | 48 | 533 | 751 | **533** | **751** | 532 | 752 | | | | | | | |
| 453.povray | 48 | 160 | 1590 | 161 | 1590 | **160** | **1590** | | | | | | | |
| 454.calculix | 48 | 220 | 1800 | 221 | 1790 | **221** | **1790** | | | | | | | |
| 459.GemsFDTD | 48 | **786** | **648** | 786 | 648 | 786 | 648 | | | | | | | |
| 465.tonto | 48 | 376 | 1260 | **375** | **1260** | 369 | 1280 | | | | | | | |
| 470.lbm | 48 | **529** | **1250** | 529 | 1250 | 530 | 1250 | | | | | | | |
| 481.wrf | 48 | 424 | 1260 | **423** | **1270** | 423 | 1270 | | | | | | | |
| 482.sphinx3 | 48 | 828 | 1130 | 829 | 1130 | **828** | **1130** | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set wtih "tuned-adm profile throughput-performance"
```

Continued on next page

## Operating System Notes (Continued)

```
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

## Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-rugf Fri Nov 10 06:14:35 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz
       2 "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 12
       siblings  : 24
       physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
       physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
    cache size : 25344 KB

 From /proc/meminfo
    MemTotal:       197744520 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

Continued on next page

# SPEC CFP2006 Result





## Platform Notes (Continued)

```
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-rugf 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
   (63cf368) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 10 01:35

SPEC is set to: /home/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p4 xfs   331G   80G  251G  25% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HPE U32 09/29/2017
  Memory:
   24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

# Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 29 12:30:18 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 November 2017.