SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30 (AMD EPYC 7551P)

SPECfp®_rate2006 = 1020

SPECfp_rate_base2006 = 891

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Oct-2017

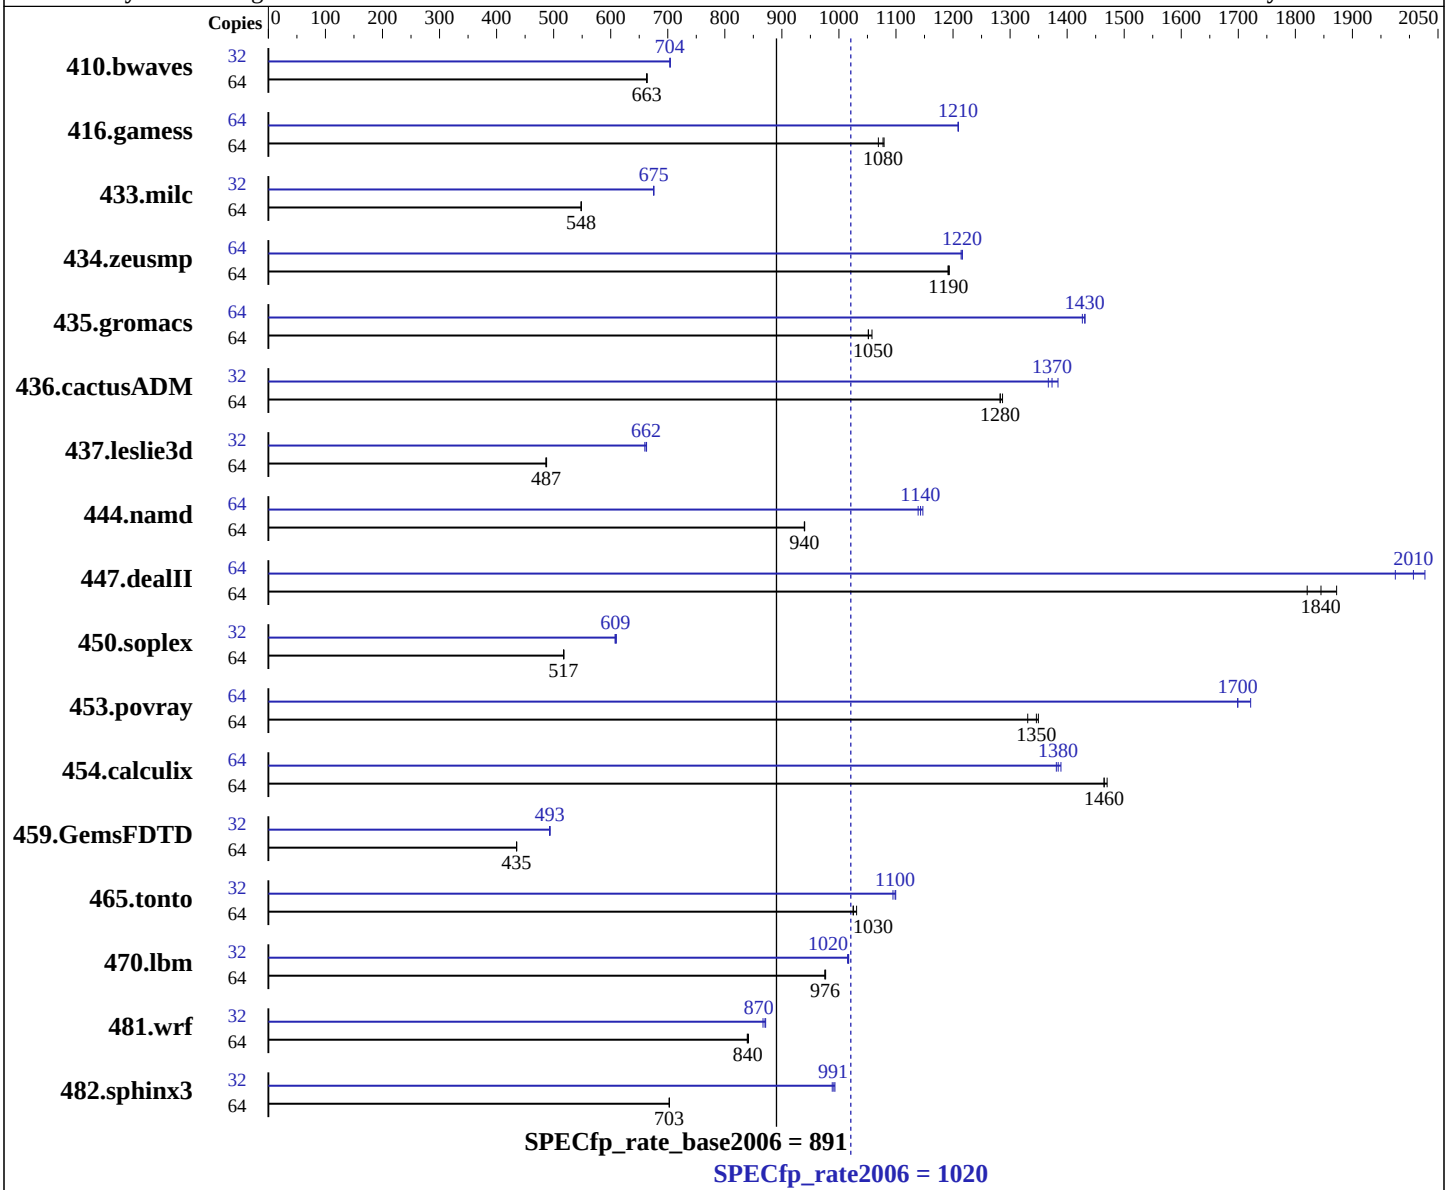

Hardware

CPU Name:	AMD EPYC 7551P
CPU Characteristics:	AMD Turbo CORE technology up to 3.00 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server 7.4 Kernel 3.10.0-693.2.2
Compiler:	C/C++/Fortran: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (Multi User)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30 (AMD EPYC 7551P)

SPECfp_rate2006 = 1020

SPECfp_rate_base2006 = 891

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Oct-2017

L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache: None
Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2667V-L)
Disk Subsystem: 1 x 2000 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1310	664	**1311**	**663**	1312	663	32	617	705	**618**	**704**	618	704
416.gamess	64	**1163**	**1080**	1161	1080	1172	1070	64	1037	1210	1036	1210	**1036**	**1210**
433.milc	64	1071	548	**1072**	**548**	1072	548	32	435	675	**435**	**675**	435	676
434.zeusmp	64	489	1190	**489**	**1190**	488	1190	64	**479**	**1220**	480	1210	479	1220
435.gromacs	64	432	1060	435	1050	**435**	**1050**	64	**319**	**1430**	319	1430	320	1430
436.cactusADM	64	**596**	**1280**	596	1280	594	1290	32	280	1370	276	1380	**278**	**1370**
437.leslie3d	64	1234	488	1236	487	**1236**	**487**	32	456	660	454	663	**454**	**662**
444.namd	64	546	940	546	939	**546**	**940**	64	451	1140	447	1150	**449**	**1140**
447.dealII	64	391	1870	402	1820	**397**	**1840**	64	361	2030	371	1980	**365**	**2010**
450.soplex	64	1030	518	**1032**	**517**	1032	517	32	**439**	**609**	438	610	439	608
453.povray	64	**253**	**1350**	252	1350	256	1330	64	**200**	**1700**	198	1720	200	1700
454.calculix	64	360	1460	**360**	**1460**	359	1470	64	**381**	**1380**	382	1380	380	1390
459.GemsFDTD	64	**1561**	**435**	1561	435	1561	435	32	687	494	689	493	**688**	**493**
465.tonto	64	614	1020	611	1030	**614**	**1030**	32	288	1090	**287**	**1100**	286	1100
470.lbm	64	**901**	**976**	902	975	900	977	32	**432**	**1020**	433	1020	432	1020
481.wrf	64	850	841	852	839	**851**	**840**	32	410	872	412	867	**411**	**870**
482.sphinx3	64	**1775**	**703**	1775	703	1775	703	32	631	988	628	993	**629**	**991**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
```

Continued on next page

Operating System Notes (Continued)

```
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS settings:
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

The binaries were built with the AMD supported x86 Open64 Compiler Suite,
which is only available from AMD at
http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/
Binaries were compiled on a system with 2 x AMD Opteron 6378 chips + 128 GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1 -mno-fma4

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mno-fma4
-mso

482.sphinx3: -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1

Continued on next page

Peak Optimization Flags (Continued)

444.namd (continued):
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver2
-mno-fma4 -WB, -mno-xop -mno-tbm

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1 -mno-fma4

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2 -mno-fma4 -WB, -mno-xop -mno-tbm -Wl,
-z,muldefs

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver2 -mno-fma4

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1 -mno-fma4

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver2 -mno-fma4

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1 -mno-fma4

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525 -HP:bdt=2m:heap=2m -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop`

Benchmarks using both Fortran and C:

435.gromacs: `-Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m -CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on -march=bdver2 -mno-fma4 -LNO:simd=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0 -LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver2 -mno-fma4`

454.calculix: `-Ofast -OPT:unroll_size=256 -OPT:alias=disjoint -GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m -march=bdver1 -mno-fma4`

481.wrf: `-Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP -WOPT:sib=on -march=bdver1 -mno-fma4`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html`
`http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml`
`http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 27 12:04:48 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2017.