SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

Sugon A420-G30 (AMD EPYC 7551)

SPECfp®_rate2006 = 1900

SPECfp_rate_base2006 = 1650

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Oct-2017

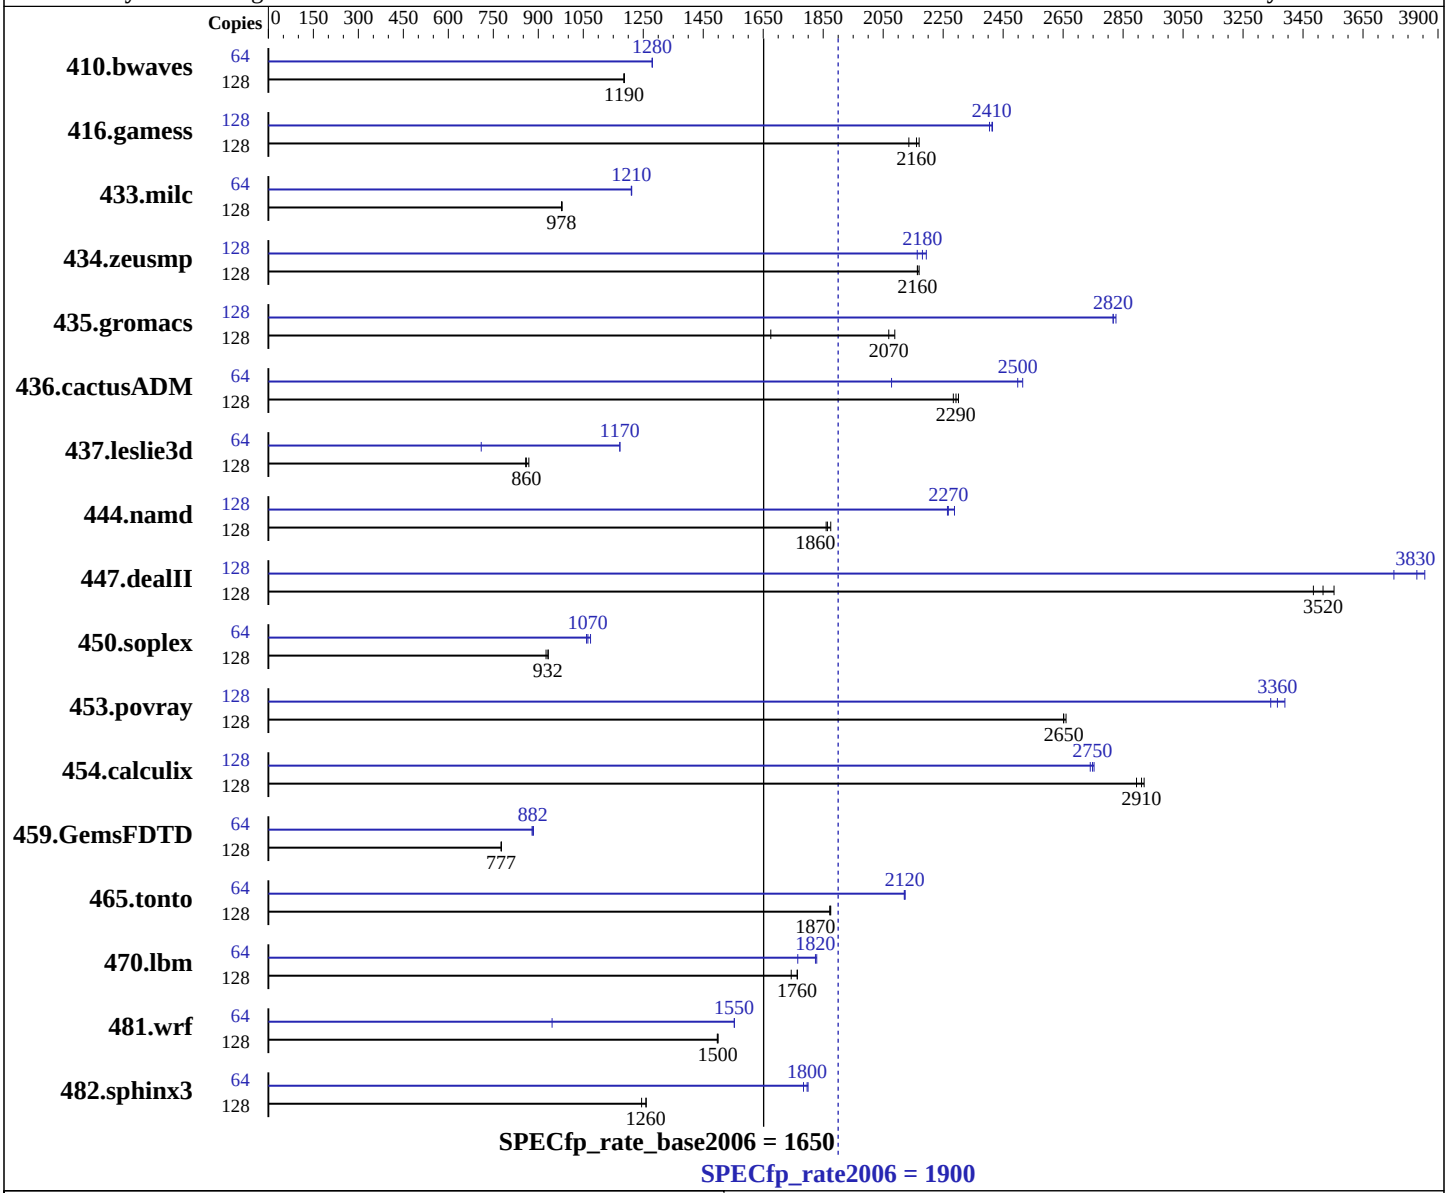

Hardware

CPU Name:	AMD EPYC 7551
CPU Characteristics:	AMD Turbo CORE technology up to 3.00 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	64 cores, 2 chips, 32 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server 7.4 x86_64 Kernel 3.10.0-693.2.2
Compiler:	C/C++/Fortran: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Multi User)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

Sugon A420-G30 (AMD EPYC 7551)

SPECfp_rate2006 = 1900

SPECfp_rate_base2006 = 1650

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Oct-2017

L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache: None
Memory: 1 TB (16 x 64 GB 2S2Rx4 PC4-2667V-R, running at 2400)
Disk Subsystem: 1 x 2000 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1465	1190	**1467**	**1190**	1467	1190	64	**679**	**1280**	679	1280	680	1280
416.gamess	128	1174	2140	1155	2170	**1160**	**2160**	128	1038	2410	1042	2400	**1039**	**2410**
433.milc	128	1200	980	1202	978	**1202**	**978**	64	485	1210	**485**	**1210**	485	1210
434.zeusmp	128	**538**	**2160**	538	2160	537	2170	128	538	2160	531	2190	**534**	**2180**
435.gromacs	128	438	2090	**442**	**2070**	546	1680	128	**324**	**2820**	323	2830	324	2820
436.cactusADM	128	**667**	**2290**	670	2280	665	2300	64	304	2520	368	2080	**306**	**2500**
437.leslie3d	128	1385	869	**1399**	**860**	1402	858	64	**513**	**1170**	513	1170	848	710
444.namd	128	547	1880	552	1860	**551**	**1860**	128	453	2260	449	2290	**453**	**2270**
447.dealII	128	**416**	**3520**	412	3550	420	3480	128	380	3860	390	3750	**382**	**3830**
450.soplex	128	1153	926	1144	933	**1145**	**932**	64	503	1060	**501**	**1070**	497	1070
453.povray	128	256	2660	**257**	**2650**	257	2650	128	204	3340	**202**	**3360**	201	3390
454.calculix	128	362	2920	365	2890	**363**	**2910**	128	**384**	**2750**	385	2740	384	2750
459.GemsFDTD	128	**1749**	**777**	1749	776	1748	777	64	772	879	**770**	**882**	768	884
465.tonto	128	673	1870	672	1880	**672**	**1870**	64	297	2120	297	2120	**297**	**2120**
470.lbm	128	1009	1740	997	1760	**998**	**1760**	64	498	1770	**482**	**1820**	481	1830
481.wrf	128	954	1500	955	1500	**954**	**1500**	64	756	946	**460**	**1550**	460	1550
482.sphinx3	128	**1982**	**1260**	2005	1240	1980	1260	64	699	1780	**694**	**1800**	693	1800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
```

Continued on next page

Operating System Notes (Continued)

```
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=114688 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS settings:
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200
This system Sugon A420-G30 is electrically equal with Sugon A620-G30 populated with the same processors and memories.
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

The binaries were built with the AMD supported x86 Open64 Compiler Suite,
which is only available from AMD at
http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/
Binaries were compiled on a system with 2 x AMD Opteron 6378 chips + 128 GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm -WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1 -mno-fma4

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mno-fma4
-mso

482.sphinx3: -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver2
-mno-fma4 -WB, -mno-xop -mno-tbm

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1 -mno-fma4

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2 -mno-fma4 -WB, -mno-xop -mno-tbm -Wl,
-z,muldefs

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver2 -mno-fma4

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1 -mno-fma4

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver2 -mno-fma4

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-Ofast -IPA:plimit=1500 -OPT:unroll_size=1024 -OPT:unroll_times_max=16 -LNO:fission=2 -CG:local_sched_alg=2 -HP -march=bdver1 -mno-fma4`

465.tonto: `-Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525 -HP:bdt=2m:heap=2m -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop`

Benchmarks using both Fortran and C:

435.gromacs: `-Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m -CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on -march=bdver2 -mno-fma4 -LNO:simd=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0 -LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver2 -mno-fma4`

454.calculix: `-Ofast -OPT:unroll_size=256 -OPT:alias=disjoint -GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m -march=bdver1 -mno-fma4`

481.wrf: `-Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP -WOPT:sib=on -march=bdver1 -mno-fma4`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html
http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml
http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 27 12:04:47 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2017.