



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116, 2.10 GHz)

**SPECfp®\_rate2006 = 951**

**SPECfp\_rate\_base2006 = 934**

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

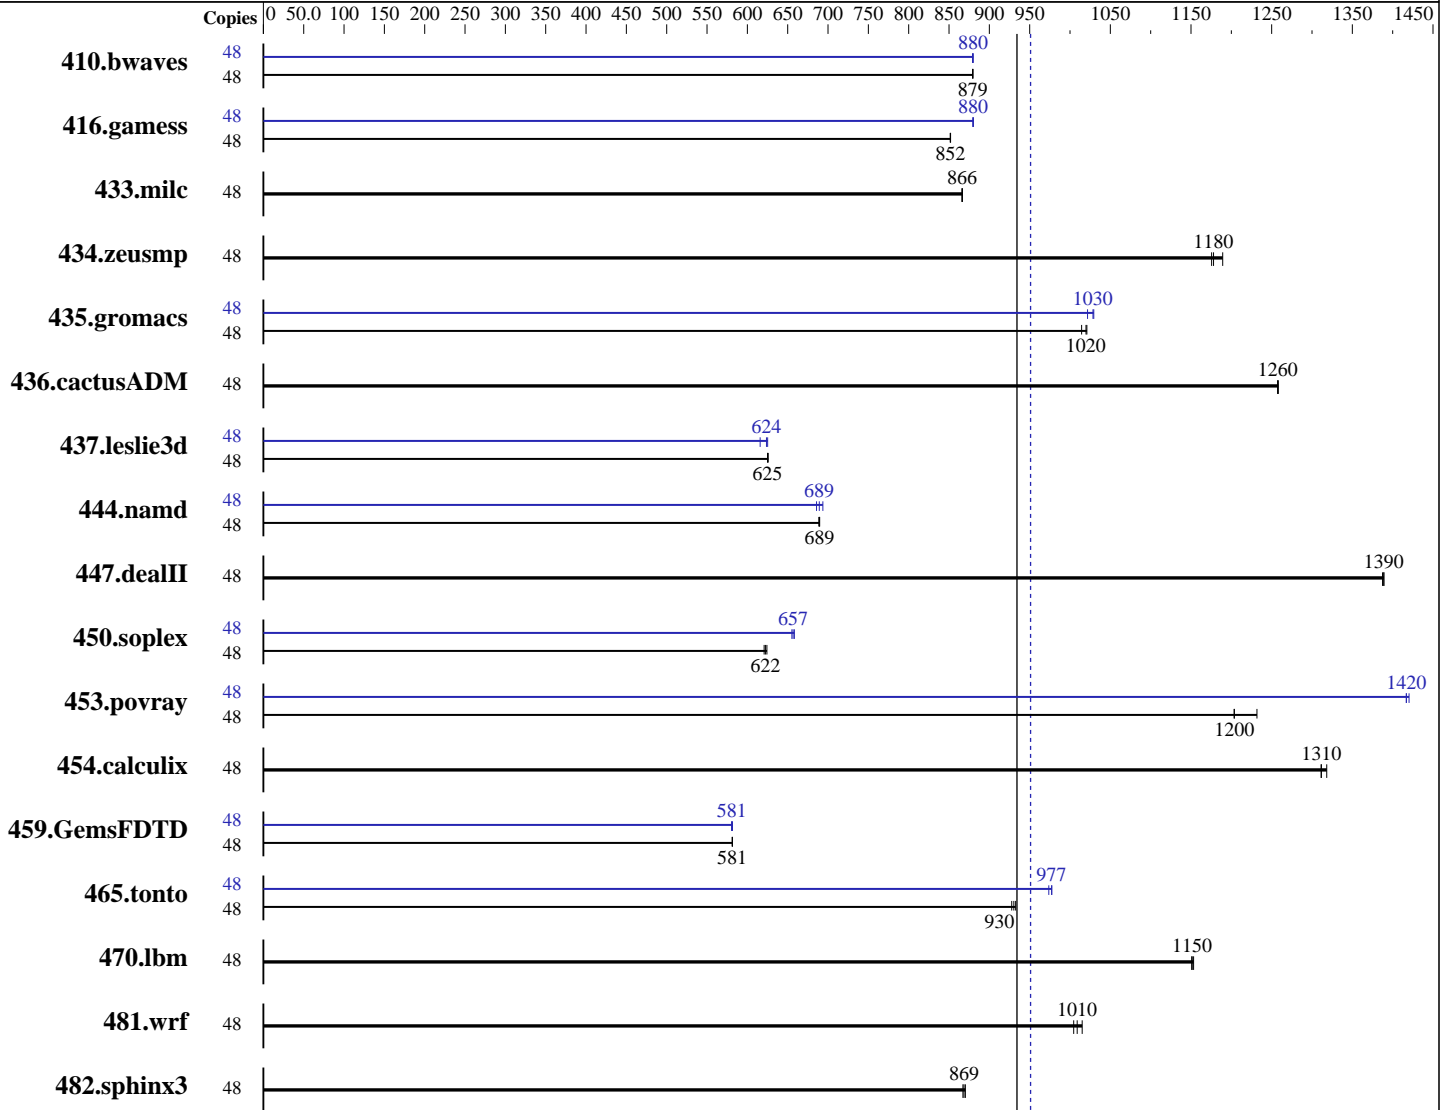

SPECfp\_rate\_base2006 = 934

**SPECfp\_rate2006 = 951**

### Hardware

CPU Name: Intel Xeon Silver 4116  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116, 2.10 GHz)

SPECfp\_rate2006 = 951

SPECfp\_rate\_base2006 = 934

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

L3 Cache: 16.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	742	879	<u>742</u>	<u>879</u>	742	880	48	<u>741</u>	<u>880</u>	742	879	741	880
416.gamess	48	1104	852	<u>1104</u>	<u>852</u>	1103	852	48	1068	880	1068	880	<u>1068</u>	<u>880</u>
433.milc	48	509	866	<u>509</u>	<u>866</u>	508	867	48	509	866	<u>509</u>	<u>866</u>	508	867
434.zeusmp	48	372	1180	<u>371</u>	<u>1180</u>	367	1190	48	372	1180	<u>371</u>	<u>1180</u>	367	1190
435.gromacs	48	338	1010	336	1020	<u>336</u>	<u>1020</u>	48	333	1030	<u>333</u>	<u>1030</u>	335	1020
436.cactusADM	48	<u>456</u>	<u>1260</u>	456	1260	456	1260	48	<u>456</u>	<u>1260</u>	456	1260	456	1260
437.leslie3d	48	722	625	<u>722</u>	<u>625</u>	721	626	48	<u>723</u>	<u>624</u>	722	625	733	616
444.namd	48	558	690	<u>558</u>	<u>689</u>	559	689	48	<u>559</u>	<u>689</u>	561	686	555	694
447.dealII	48	396	1390	<u>395</u>	<u>1390</u>	395	1390	48	396	1390	<u>395</u>	<u>1390</u>	395	1390
450.soplex	48	645	621	<u>643</u>	<u>622</u>	641	624	48	611	655	608	658	<u>610</u>	<u>657</u>
453.povray	48	212	1200	<u>212</u>	<u>1200</u>	207	1230	48	180	1420	<u>180</u>	<u>1420</u>	180	1420
454.calculix	48	<u>302</u>	<u>1310</u>	302	1310	300	1320	48	<u>302</u>	<u>1310</u>	302	1310	300	1320
459.GemsFDTD	48	876	581	<u>876</u>	<u>581</u>	876	581	48	876	582	<u>877</u>	<u>581</u>	877	580
465.tonto	48	<u>508</u>	<u>930</u>	509	928	506	933	48	483	977	485	974	<u>483</u>	<u>977</u>
470.lbm	48	<u>573</u>	<u>1150</u>	572	1150	573	1150	48	<u>573</u>	<u>1150</u>	572	1150	573	1150
481.wrf	48	528	1020	<u>531</u>	<u>1010</u>	534	1000	48	528	1020	<u>531</u>	<u>1010</u>	534	1000
482.sphinx3	48	1079	867	<u>1077</u>	<u>869</u>	1075	870	48	1079	867	<u>1077</u>	<u>869</u>	1075	870

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116, 2.10 GHz)

SPECfp\_rate2006 = 951

SPECfp\_rate\_base2006 = 934

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Platform Notes

### BIOS Settings:

Intel HyperThreading Technology set to Enabled  
 CPU performance set to Enterprise  
 Power Performance Tuning set to OS  
 SNC set to Enabled  
 IMC Interleaving set to 1-way Interleave  
 Patrol Scrub set to Disabled  
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on linux-3joc Wed Dec 6 05:59:32 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 12
  siblings     : 24
  physical 0   : cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1   : cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size    : 16896 KB
```

### From /proc/meminfo

```
MemTotal:      394864160 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

### /usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP2

### From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116, 2.10 GHz)

SPECfp\_rate2006 = 951

SPECfp\_rate\_base2006 = 934

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Apr-2017

### Platform Notes (Continued)

```
uname -a:
Linux linux-3joc 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 5 18:45
```

```
SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   516G  112G  404G  22% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017

Memory:  
24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECfp\_rate2006 = 951

SPECfp\_rate\_base2006 = 934

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Apr-2017

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECfp\_rate2006 = 951

SPECfp\_rate\_base2006 = 934

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECfp\_rate2006 = 951

SPECfp\_rate\_base2006 = 934

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Silver 4116, 2.10 GHz)

**SPECfp\_rate2006 = 951**

**SPECfp\_rate\_base2006 = 934**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 27 12:04:43 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 December 2017.