



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Sugon**

**SPECfp®\_rate2006 = 1770**

I620-G30 (Intel Xeon Platinum 8180)

**SPECfp\_rate\_base2006 = 1710**

CPU2006 license: 9046


Test date: Dec-2017

Test sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Apr-2017

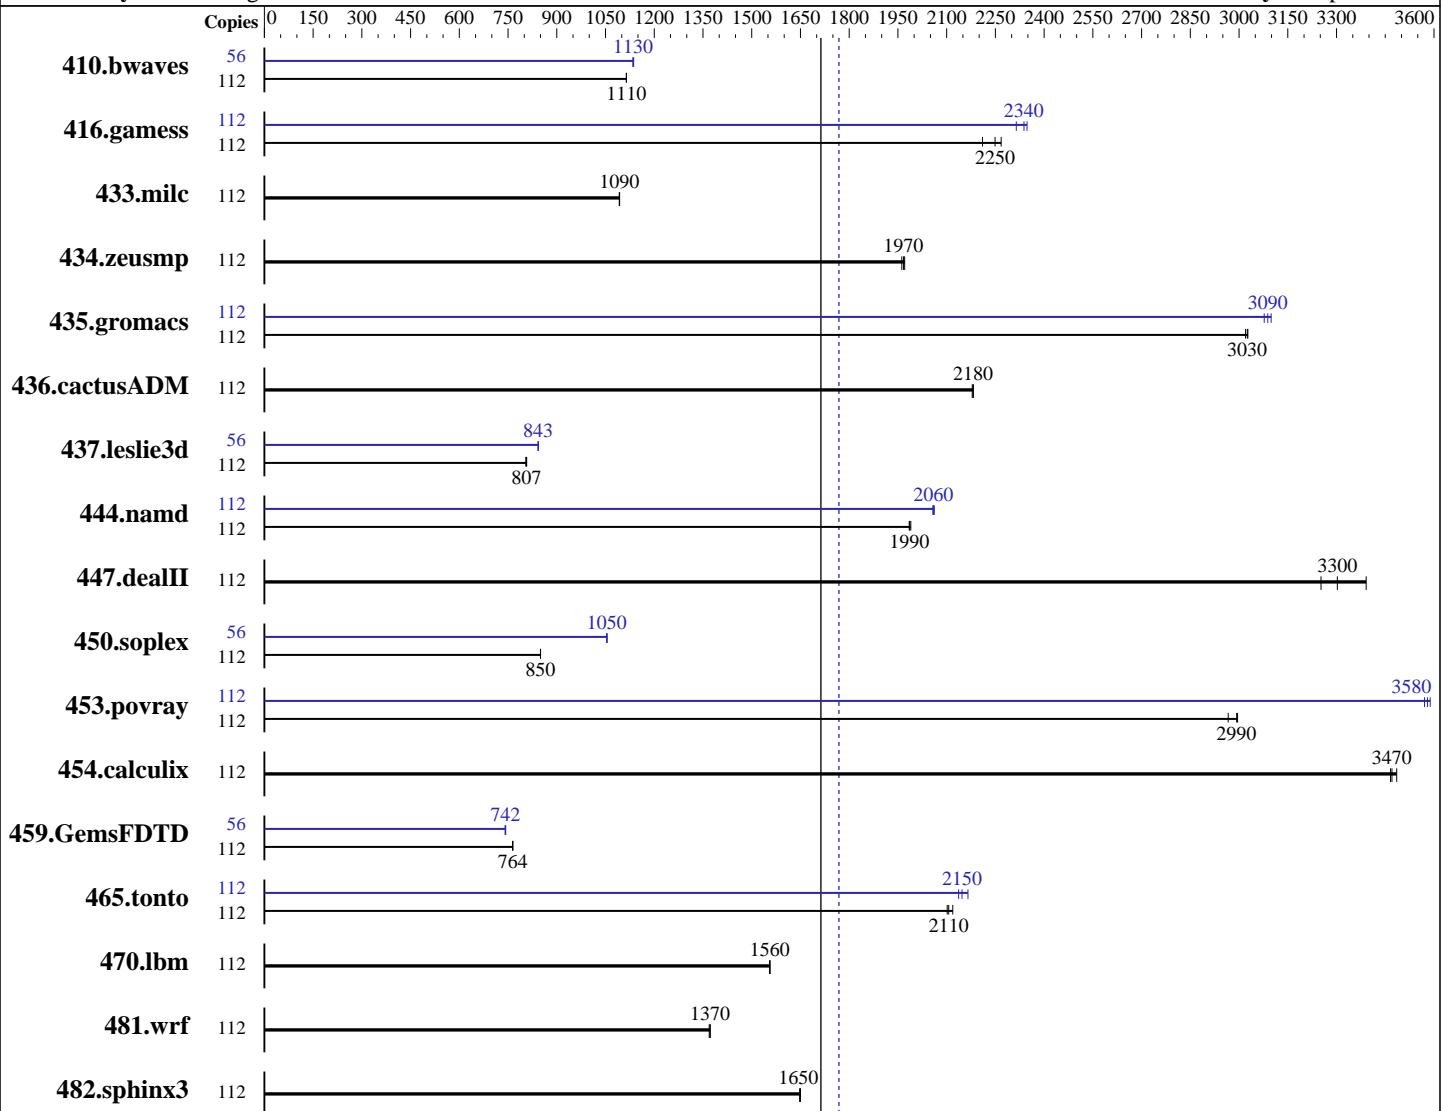

**SPECfp\_rate\_base2006 = 1710**

**SPECfp\_rate2006 = 1770**

## Hardware

CPU Name: Intel Xeon Platinum 8180  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 5 (Multi User with GUI)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Sugon**

**SPECfp\_rate2006 = 1770**

I620-G30 (Intel Xeon Platinum 8180)

**SPECfp\_rate\_base2006 = 1710**

**CPU2006 license:** 9046

**Test date:** Dec-2017

**Test sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2667V-R)  
 Disk Subsystem: 1 x 4.0 TB SATA, 10K RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	<b>1366</b>	<b>1110</b>	1366	1110	1366	1110	56	670	1140	<b>671</b>	<b>1130</b>	671	1130
416.gamess	112	992	2210	<b>975</b>	<b>2250</b>	967	2270	112	934	2350	948	2310	<b>938</b>	<b>2340</b>
433.milc	112	941	1090	<b>941</b>	<b>1090</b>	940	1090	112	941	1090	<b>941</b>	<b>1090</b>	940	1090
434.zeusmp	112	519	1960	<b>518</b>	<b>1970</b>	517	1970	112	519	1960	<b>518</b>	<b>1970</b>	517	1970
435.gromacs	112	<b>264</b>	<b>3030</b>	265	3020	264	3030	112	258	3100	260	3080	<b>259</b>	<b>3090</b>
436.cactusADM	112	614	2180	<b>614</b>	<b>2180</b>	613	2180	112	614	2180	<b>614</b>	<b>2180</b>	613	2180
437.leslie3d	112	1309	805	1304	807	<b>1305</b>	<b>807</b>	56	625	843	<b>625</b>	<b>843</b>	624	843
444.namd	112	453	1980	451	1990	<b>452</b>	<b>1990</b>	112	<b>436</b>	<b>2060</b>	437	2060	436	2060
447.dealII	112	378	3390	394	3250	<b>388</b>	<b>3300</b>	112	378	3390	394	3250	<b>388</b>	<b>3300</b>
450.soplex	112	<b>1099</b>	<b>850</b>	1099	850	1099	850	56	<b>443</b>	<b>1050</b>	443	1050	443	1050
453.povray	112	201	2970	199	3000	<b>199</b>	<b>2990</b>	112	167	3570	166	3590	<b>166</b>	<b>3580</b>
454.calculix	112	265	3490	267	3470	<b>266</b>	<b>3470</b>	112	265	3490	267	3470	<b>266</b>	<b>3470</b>
459.GemsFDTD	112	1555	764	<b>1555</b>	<b>764</b>	1554	765	56	802	741	800	743	<b>801</b>	<b>742</b>
465.tonto	112	524	2100	<b>523</b>	<b>2110</b>	520	2120	112	516	2140	509	2170	<b>513</b>	<b>2150</b>
470.lbm	112	989	1560	<b>989</b>	<b>1560</b>	989	1560	112	989	1560	<b>989</b>	<b>1560</b>	989	1560
481.wrf	112	912	1370	<b>912</b>	<b>1370</b>	914	1370	112	912	1370	<b>912</b>	<b>1370</b>	914	1370
482.sphinx3	112	<b>1324</b>	<b>1650</b>	1325	1650	1323	1650	112	<b>1324</b>	<b>1650</b>	1325	1650	1323	1650

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/tianywan/benchmarks/cpu2006/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on localhost Mon Dec 4 21:30:13 2017

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 1770

I620-G30 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 9046

Test date: Dec-2017

Test sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Apr-2017

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
  2 "physical id"s (chips)
    112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
cache size : 39424 KB
```

From /proc/meminfo

```
MemTotal:      394872828 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux localhost 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Feb 24 15:42

SPEC is set to: /home/tianywan/benchmarks/cpu2006  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

**SPECfp\_rate2006 = 1770**

I620-G30 (Intel Xeon Platinum 8180)

**SPECfp\_rate\_base2006 = 1710**

CPU2006 license: 9046

Test date: Dec-2017

Test sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Apr-2017

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	3.6T	235G	3.4T	7%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0JGST023 11/06/2017

Memory:

24x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/tianyan/benchmarks/cpu2006/lib/ia32:/home/tianyan/benchmarks/cpu2006/lib/intel64:/home/tianyan/benchmarks/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

I620-G30 (Intel Xeon Platinum 8180)

**SPECfp\_rate2006 = 1770**

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Apr-2017

## Base Portability Flags (Continued)

```
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

**SPECfp\_rate2006 = 1770**

I620-G30 (Intel Xeon Platinum 8180)

**SPECfp\_rate\_base2006 = 1710**

CPU2006 license: 9046

Test date: Dec-2017

Test sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
  450.soplex: -D_FILE_OFFSET_BITS=64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
  -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -fno-alias -auto-ilp32
  -qopt-mem-layout-trans=3
```

447.dealII: basepeak = yes

```
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
  -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -qopt-malloc-options=3
  -qopt-mem-layout-trans=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

I620-G30 (Intel Xeon Platinum 8180)

SPECfp\_rate2006 = 1770

CPU2006 license: 9046

Test date: Dec-2017

Test sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Sugon-Purley-Platform-Settings-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Sugon-Purley-Platform-Settings-revA-I.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

**SPECfp\_rate2006 = 1770**

I620-G30 (Intel Xeon Platinum 8180)

**SPECfp\_rate\_base2006 = 1710**

**CPU2006 license:** 9046

**Test date:** Dec-2017

**Test sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:06:18 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.