SPEC® CINT2006 Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10
(2.80 GHz, Intel Xeon Gold 6143)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 3860

CPU2006 license:	3	**Test date:**	Nov-2017
Test sponsor:	HPE	**Hardware Availability:**	Dec-2017
Tested by:	HPE	**Software Availability:**	Sep-2017

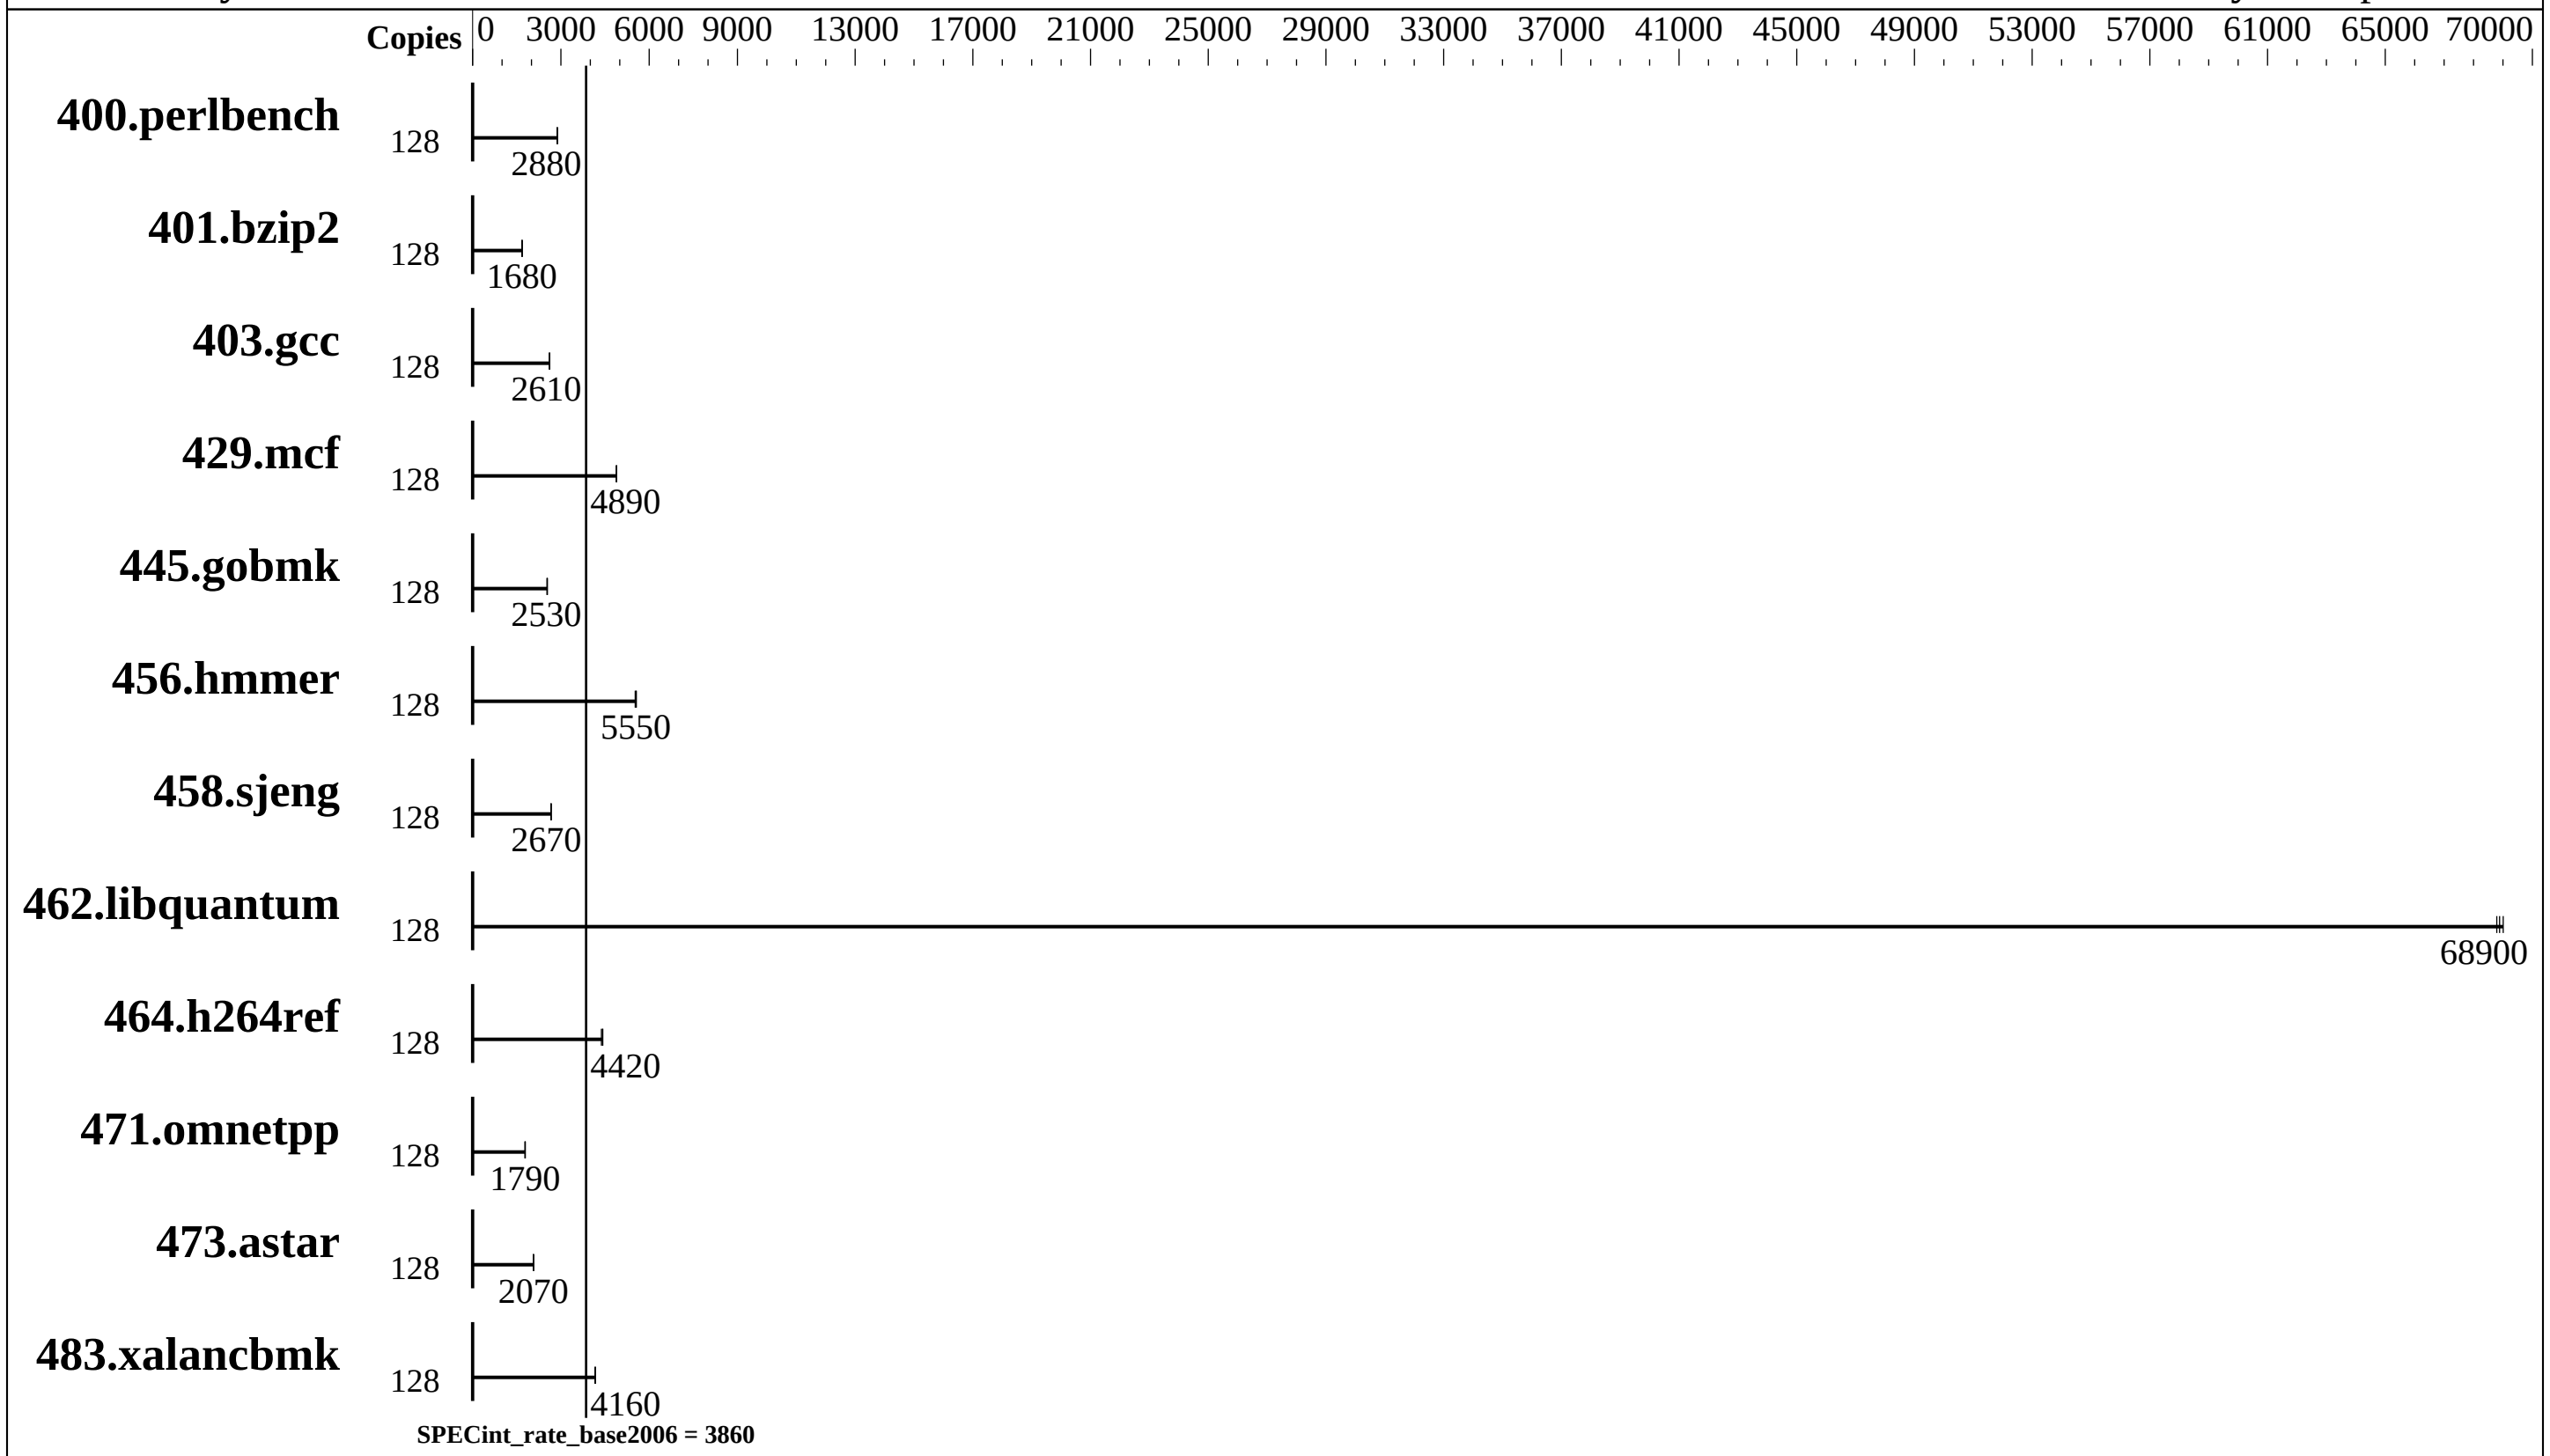

Hardware

CPU Name:	Intel Xeon Gold 6143
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	64 cores, 4 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2, 4 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	22 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (48 x 8 GB 2Rx8 PC4-2666V-R)
Disk Subsystem:	1 x 960 GB SATA SSD, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-68-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL560 Gen10
(2.80 GHz, Intel Xeon Gold 6143)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3860

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	128	435	2870	434	2880	**435**	**2880**							
401.bzip2	128	737	1680	733	1680	**734**	**1680**							
403.gcc	128	**395**	**2610**	395	2610	393	2620							
429.mcf	128	**239**	**4890**	239	4880	239	4890							
445.gobmk	128	529	2540	530	2530	**530**	**2530**							
456.hmmer	128	215	5560	216	5530	**215**	**5550**							
458.sjeng	128	**581**	**2670**	581	2670	581	2660							
462.libquantum	128	38.6	68800	**38.5**	**68900**	38.4	69000							
464.h264ref	128	640	4420	**642**	**4420**	647	4380							
471.omnetpp	128	**448**	**1790**	448	1780	448	1790							
473.astar	128	434	2070	435	2060	**435**	**2070**							
483.xalancbmk	128	212	4170	212	4160	**212**	**4160**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set wtih "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Stale A to S set to Enabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E State
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-mcua Fri Nov 17 09:15:10 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6143 CPU @ 2.80GHz
      4 "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   cache size : 22528 KB

From /proc/meminfo
   MemTotal:       395913880 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-mcua 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
   (63cf368) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 17 08:25

SPEC is set to: /home/cpu2006
```

Continued on next page

SPEC CINT2006 Result

Platform Notes (Continued)

```
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdb4      xfs   852G   37G  816G   5% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS HPE U34 09/29/2017
   Memory:
    48x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
icc -m32 -L/opt/intel/compilers_and_libraries_2018.0.082/linux/lib/ia32

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2018.0.082/linux/lib/ia32

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/home/cpu2006/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 12:09:41 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 January 2018.