SPEC® CFP2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen10
(1.70 GHz, Intel Xeon Bronze 3104)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 352

CPU2006 license:	3	**Test date:**	Dec-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

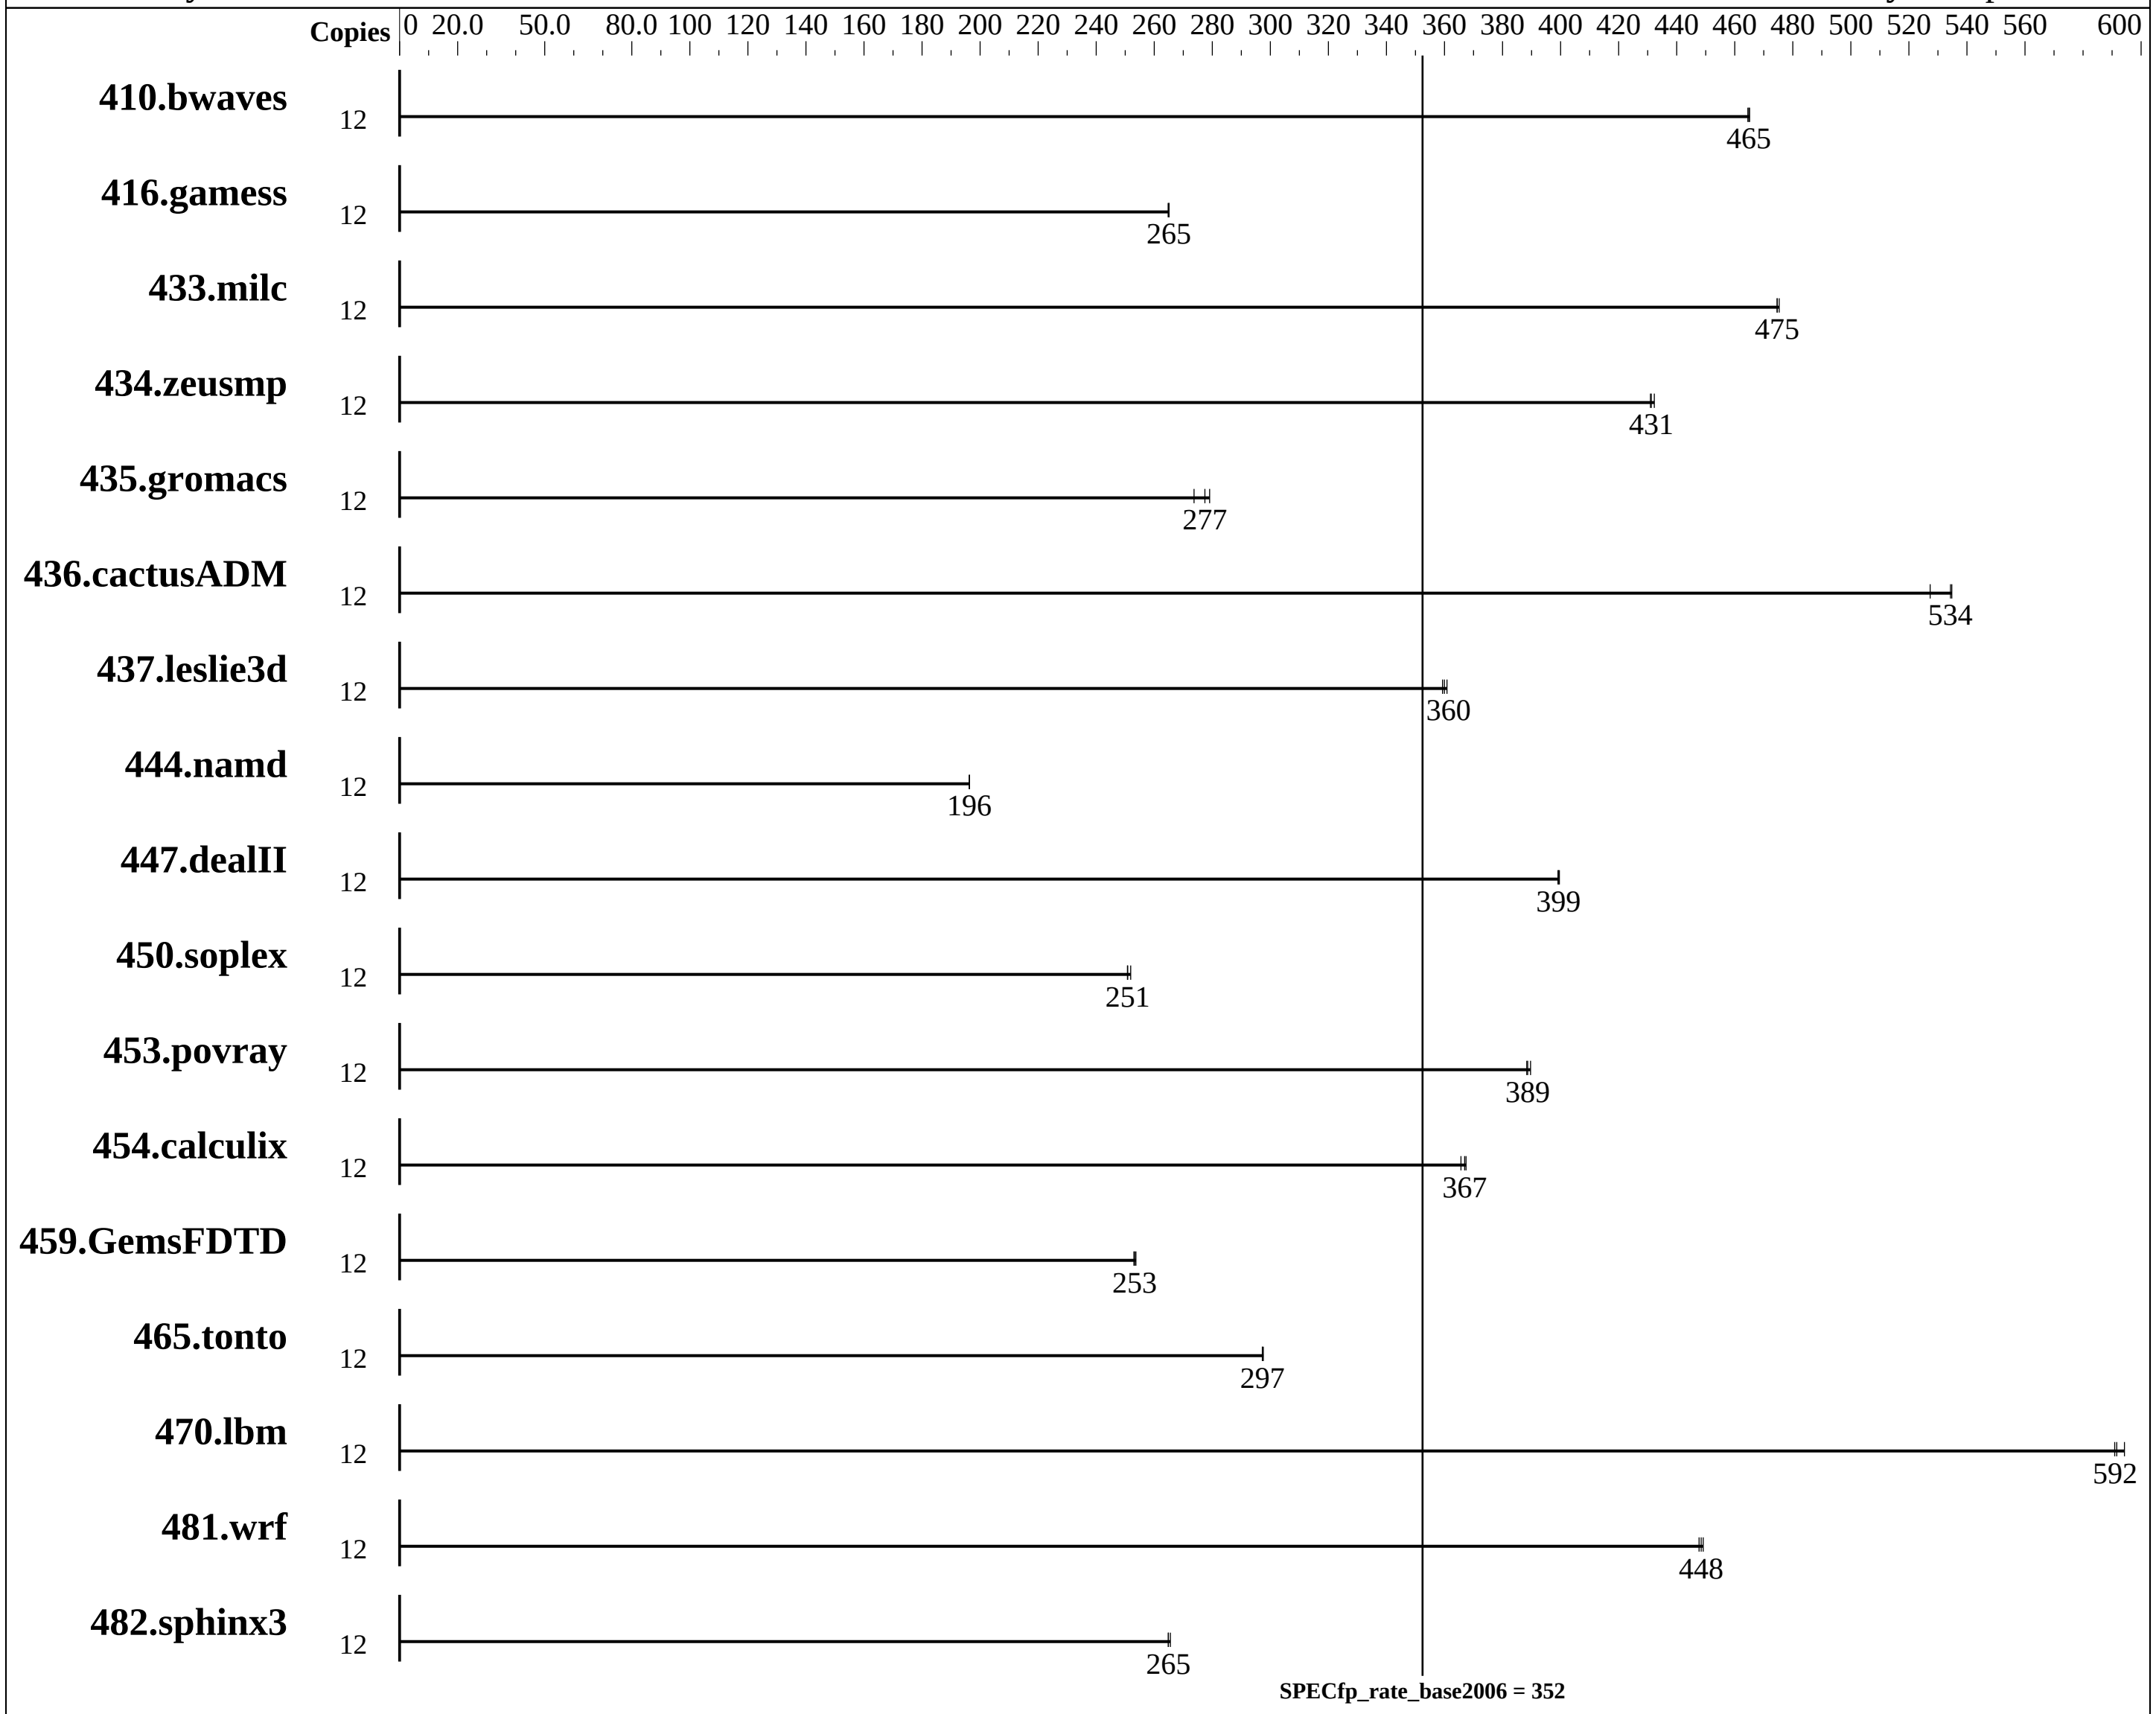

Hardware

CPU Name:	Intel Xeon Bronze 3104
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen10
(1.70 GHz, Intel Xeon Bronze 3104)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 352

CPU2006 license:	3	**Test date:**	Dec-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

L3 Cache:	8.25 MB I+D on chip per chip	Base Pointers:	32/64-bit
Other Cache:	None	Peak Pointers:	Not Applicable
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)	Other Software:	None
Disk Subsystem:	1 x 480 GB SATA SSD, RAID 0		
Other Hardware:	None		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	351	465	351	465	**351**	**465**							
416.gamess	12	886	265	887	265	**886**	**265**							
433.milc	12	232	475	232	475	**232**	**475**							
434.zeusmp	12	**253**	**431**	253	432	253	431							
435.gromacs	12	307	279	**309**	**277**	313	274							
436.cactusADM	12	272	527	268	535	**268**	**534**							
437.leslie3d	12	314	359	**313**	**360**	313	361							
444.namd	12	490	196	490	196	**490**	**196**							
447.dealII	12	344	400	344	399	**344**	**399**							
450.soplex	12	399	251	**399**	**251**	397	252							
453.povray	12	**164**	**389**	164	390	164	388							
454.calculix	12	269	367	**270**	**367**	271	366							
459.GemsFDTD	12	**503**	**253**	503	253	502	254							
465.tonto	12	**397**	**297**	397	297	397	298							
470.lbm	12	279	591	277	594	**279**	**592**							
481.wrf	12	**299**	**448**	298	449	299	448							
482.sphinx3	12	883	265	881	266	**883**	**265**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
```

Continued on next page

Operating System Notes (Continued)

```
tuned profile set wtih "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E State
 Workload Profile set to Custom
  Sub-NUMA Clustering set to Disabled
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on sy480_hjp_suse Sun Dec 10 14:38:58 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
       2 "physical id"s (chips)
       12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 6
       siblings  : 6
       physical 0: cores 0 1 2 3 4 5
       physical 1: cores 0 1 2 3 4 5
    cache size : 8448 KB

 From /proc/meminfo
    MemTotal:       395933012 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
```

Continued on next page

Platform Notes (Continued)

```
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux sy480_hjp_suse 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
    (9464f67) x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Dec 10 14:38

 SPEC is set to: /home/cpu2006
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   407G  122G  285G  30% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS HPE I42 09/27/2017
   Memory:
    24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz, configured at 2133 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
    icc -m64

C++ benchmarks:
    icpc -m64

Fortran benchmarks:
    ifort -m64

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves:	-DSPEC_CPU_LP64
416.gamess:	-DSPEC_CPU_LP64
433.milc:	-DSPEC_CPU_LP64
434.zeusmp:	-DSPEC_CPU_LP64
435.gromacs:	-DSPEC_CPU_LP64 -nofor_main
436.cactusADM:	-DSPEC_CPU_LP64 -nofor_main
437.leslie3d:	-DSPEC_CPU_LP64
444.namd:	-DSPEC_CPU_LP64
447.dealII:	-DSPEC_CPU_LP64
450.soplex:	-DSPEC_CPU_LP64
453.povray:	-DSPEC_CPU_LP64
454.calculix:	-DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD:	-DSPEC_CPU_LP64
465.tonto:	-DSPEC_CPU_LP64
470.lbm:	-DSPEC_CPU_LP64
481.wrf:	-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3:	-DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 12:10:00 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 January 2018.