SPEC® CINT2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.10 GHz, AMD EPYC 7251)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 690

CPU2006 license: 3		**Test date:**	Dec-2017
Test sponsor:	HPE	**Hardware Availability:**	Nov-2017
Tested by:	HPE	**Software Availability:**	Sep-2017

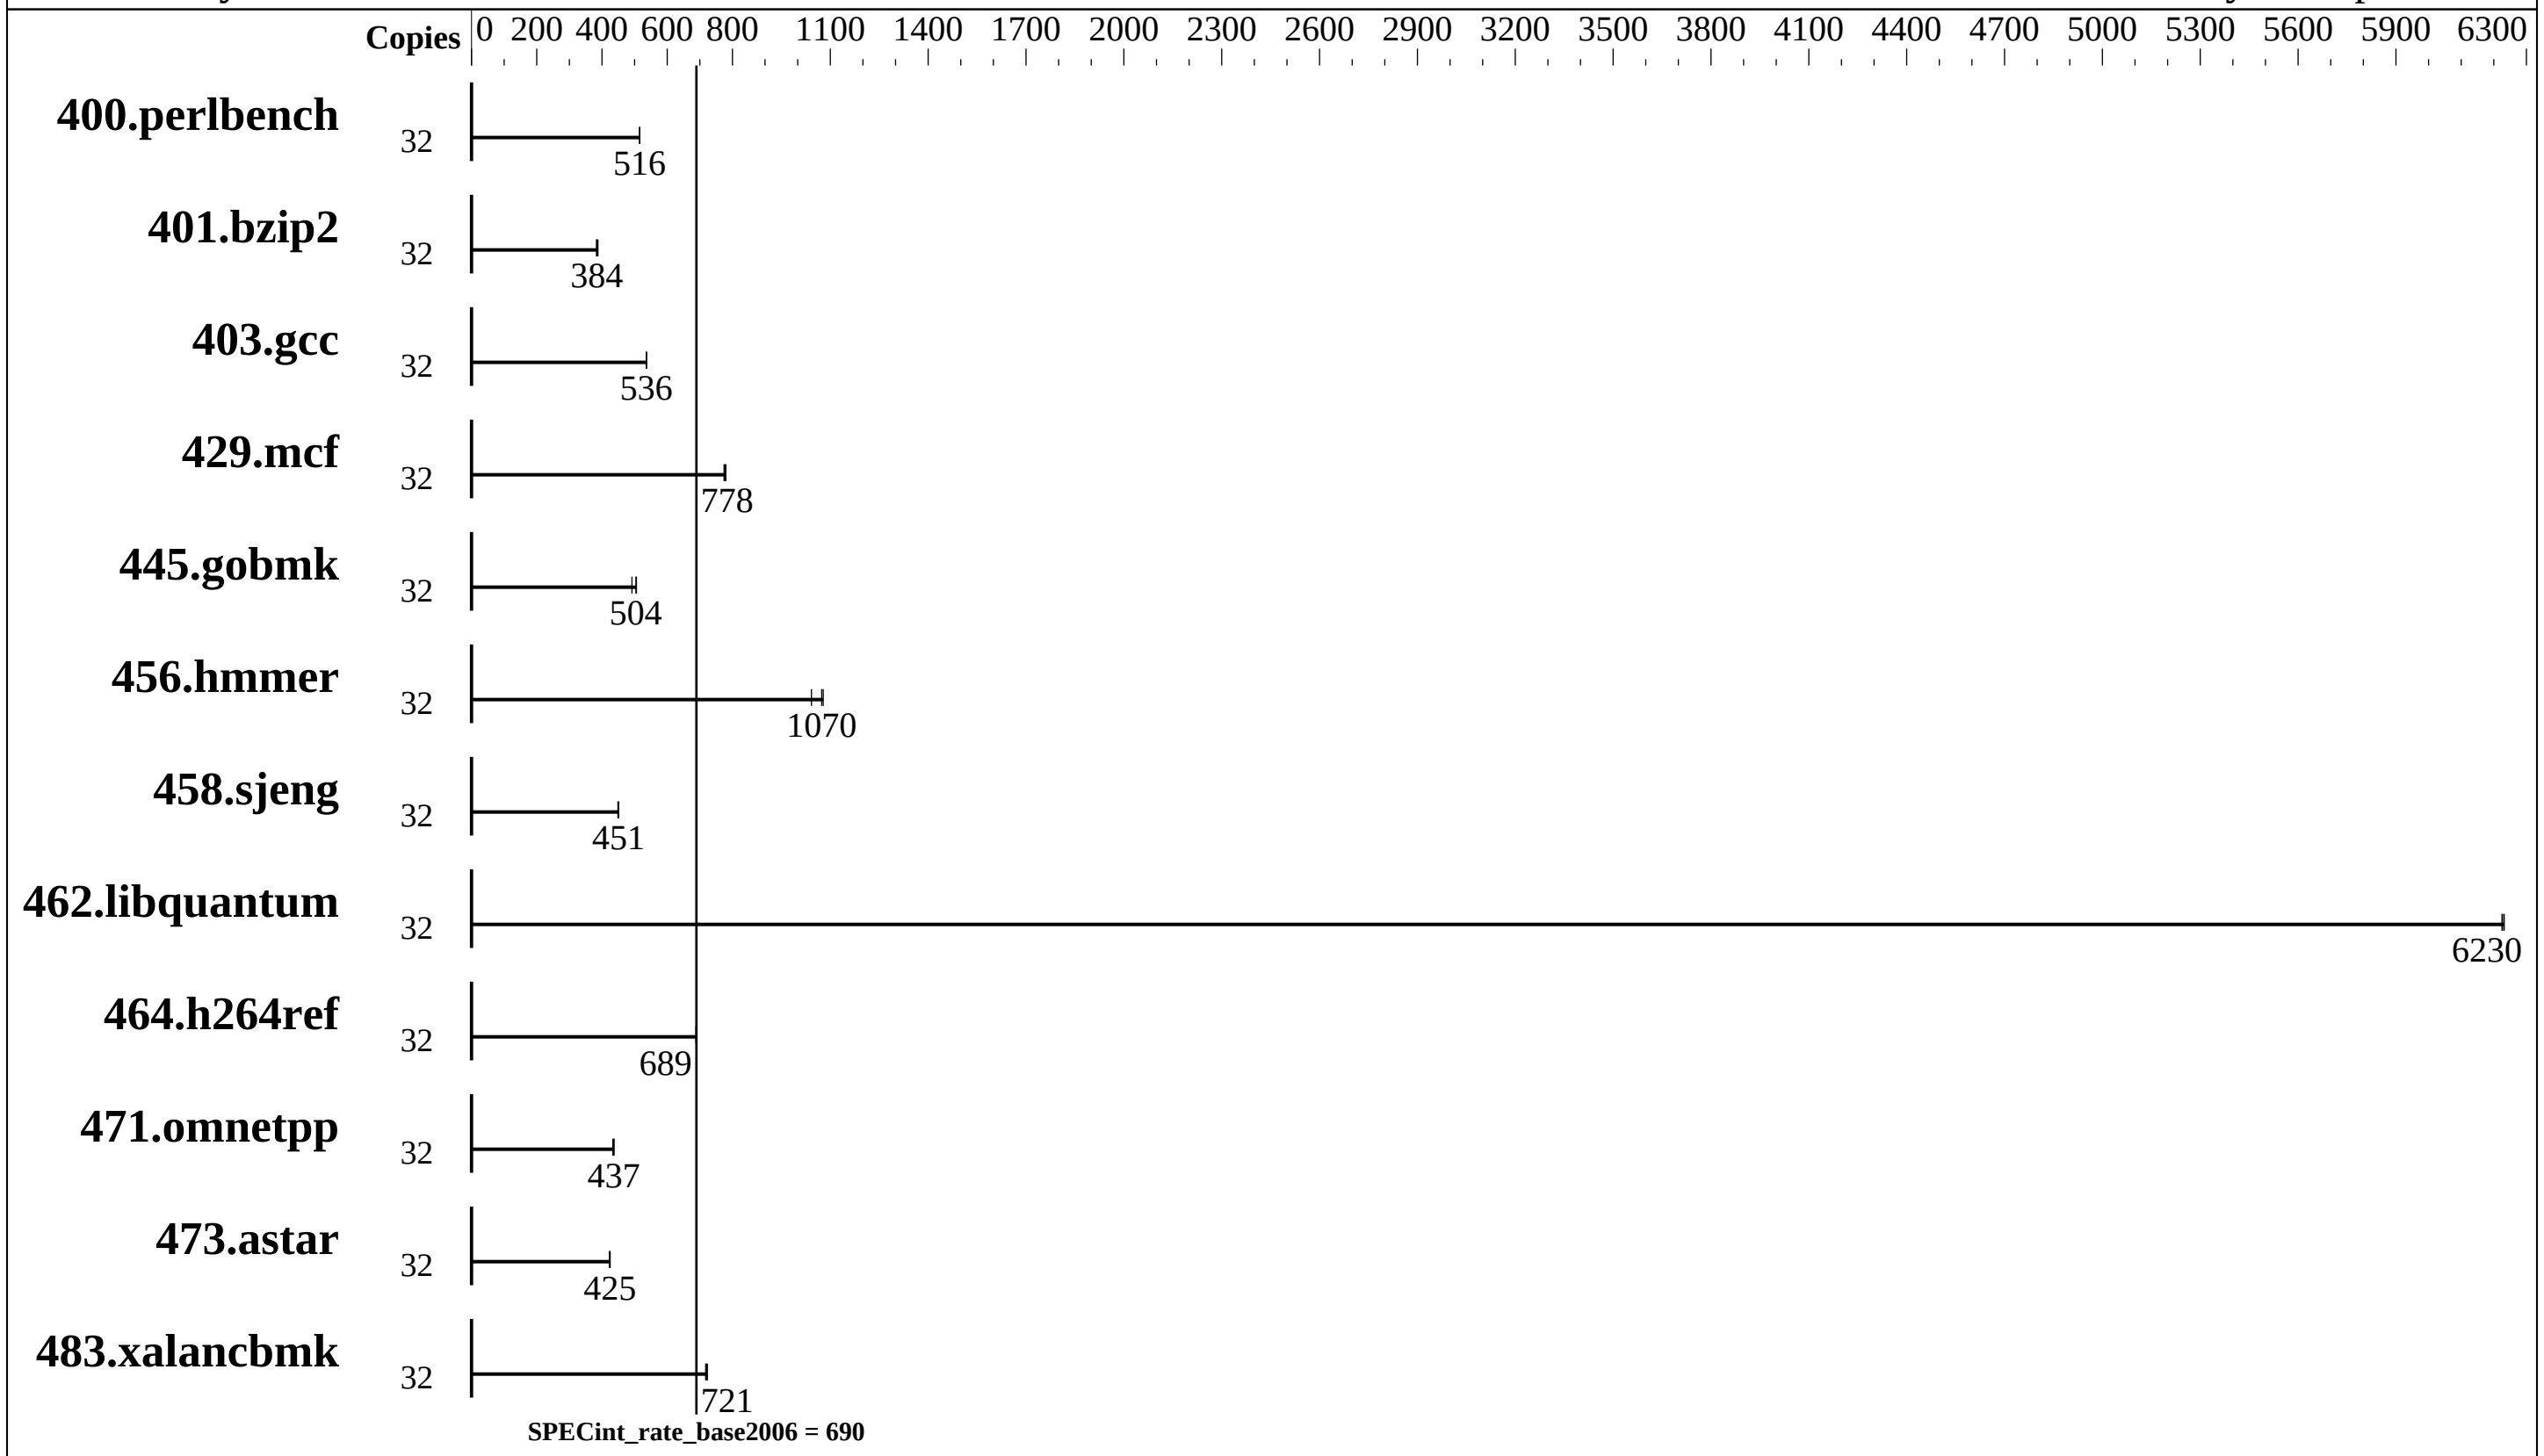

Hardware

CPU Name:	AMD EPYC 7251
CPU Characteristics:	AMD Turbo CORE technology up to 2.90 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	32 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L, running at 2400)
Disk Subsystem:	1 x 400 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.73-5-default
Compiler:	C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	MicroQuill SmartHeap 10.0 32-bit Library for Linux

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	606	516	606	516	**606**	**516**							
401.bzip2	32	806	383	**803**	**384**	797	388							
403.gcc	32	**481**	**536**	480	537	481	536							
429.mcf	32	377	774	374	780	**375**	**778**							
445.gobmk	32	**666**	**504**	664	506	682	492							
456.hmmer	32	**278**	**1070**	277	1080	286	1040							
458.sjeng	32	**859**	**451**	863	449	859	451							
462.libquantum	32	106	6230	107	6230	**106**	**6230**							
464.h264ref	32	**1028**	**689**	1029	688	1028	689							
471.omnetpp	32	458	437	**458**	**437**	461	433							
473.astar	32	529	425	531	423	**529**	**425**							
483.xalancbmk	32	305	723	**306**	**721**	308	718							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
Set vm/nr_hugepages=86016 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
 BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Performance Determinism set to Power Deterministic
  Memory Patrol Scrubbing set to Disabled
  Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C6 State
  Processor Power and Utilization Monitoring set to Disabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"
```

Continued on next page

General Notes (Continued)

```
The binaries were built with the x86 Open64 Compiler Suite,
which is only available from (and supported by) AMD at
http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
```

C++ benchmarks:

```
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 6 12:09:20 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 January 2018.