SPEC® CFP2006 Result

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp®_rate2006 = 1810

SPECfp_rate_base2006 = 1780

CPU2006 license:	9019	**Test date:**	Dec-2017
Test sponsor:	Cisco Systems	**Hardware Availability:**	Aug-2017
Tested by:	Cisco Systems	**Software Availability:**	Jul-2017

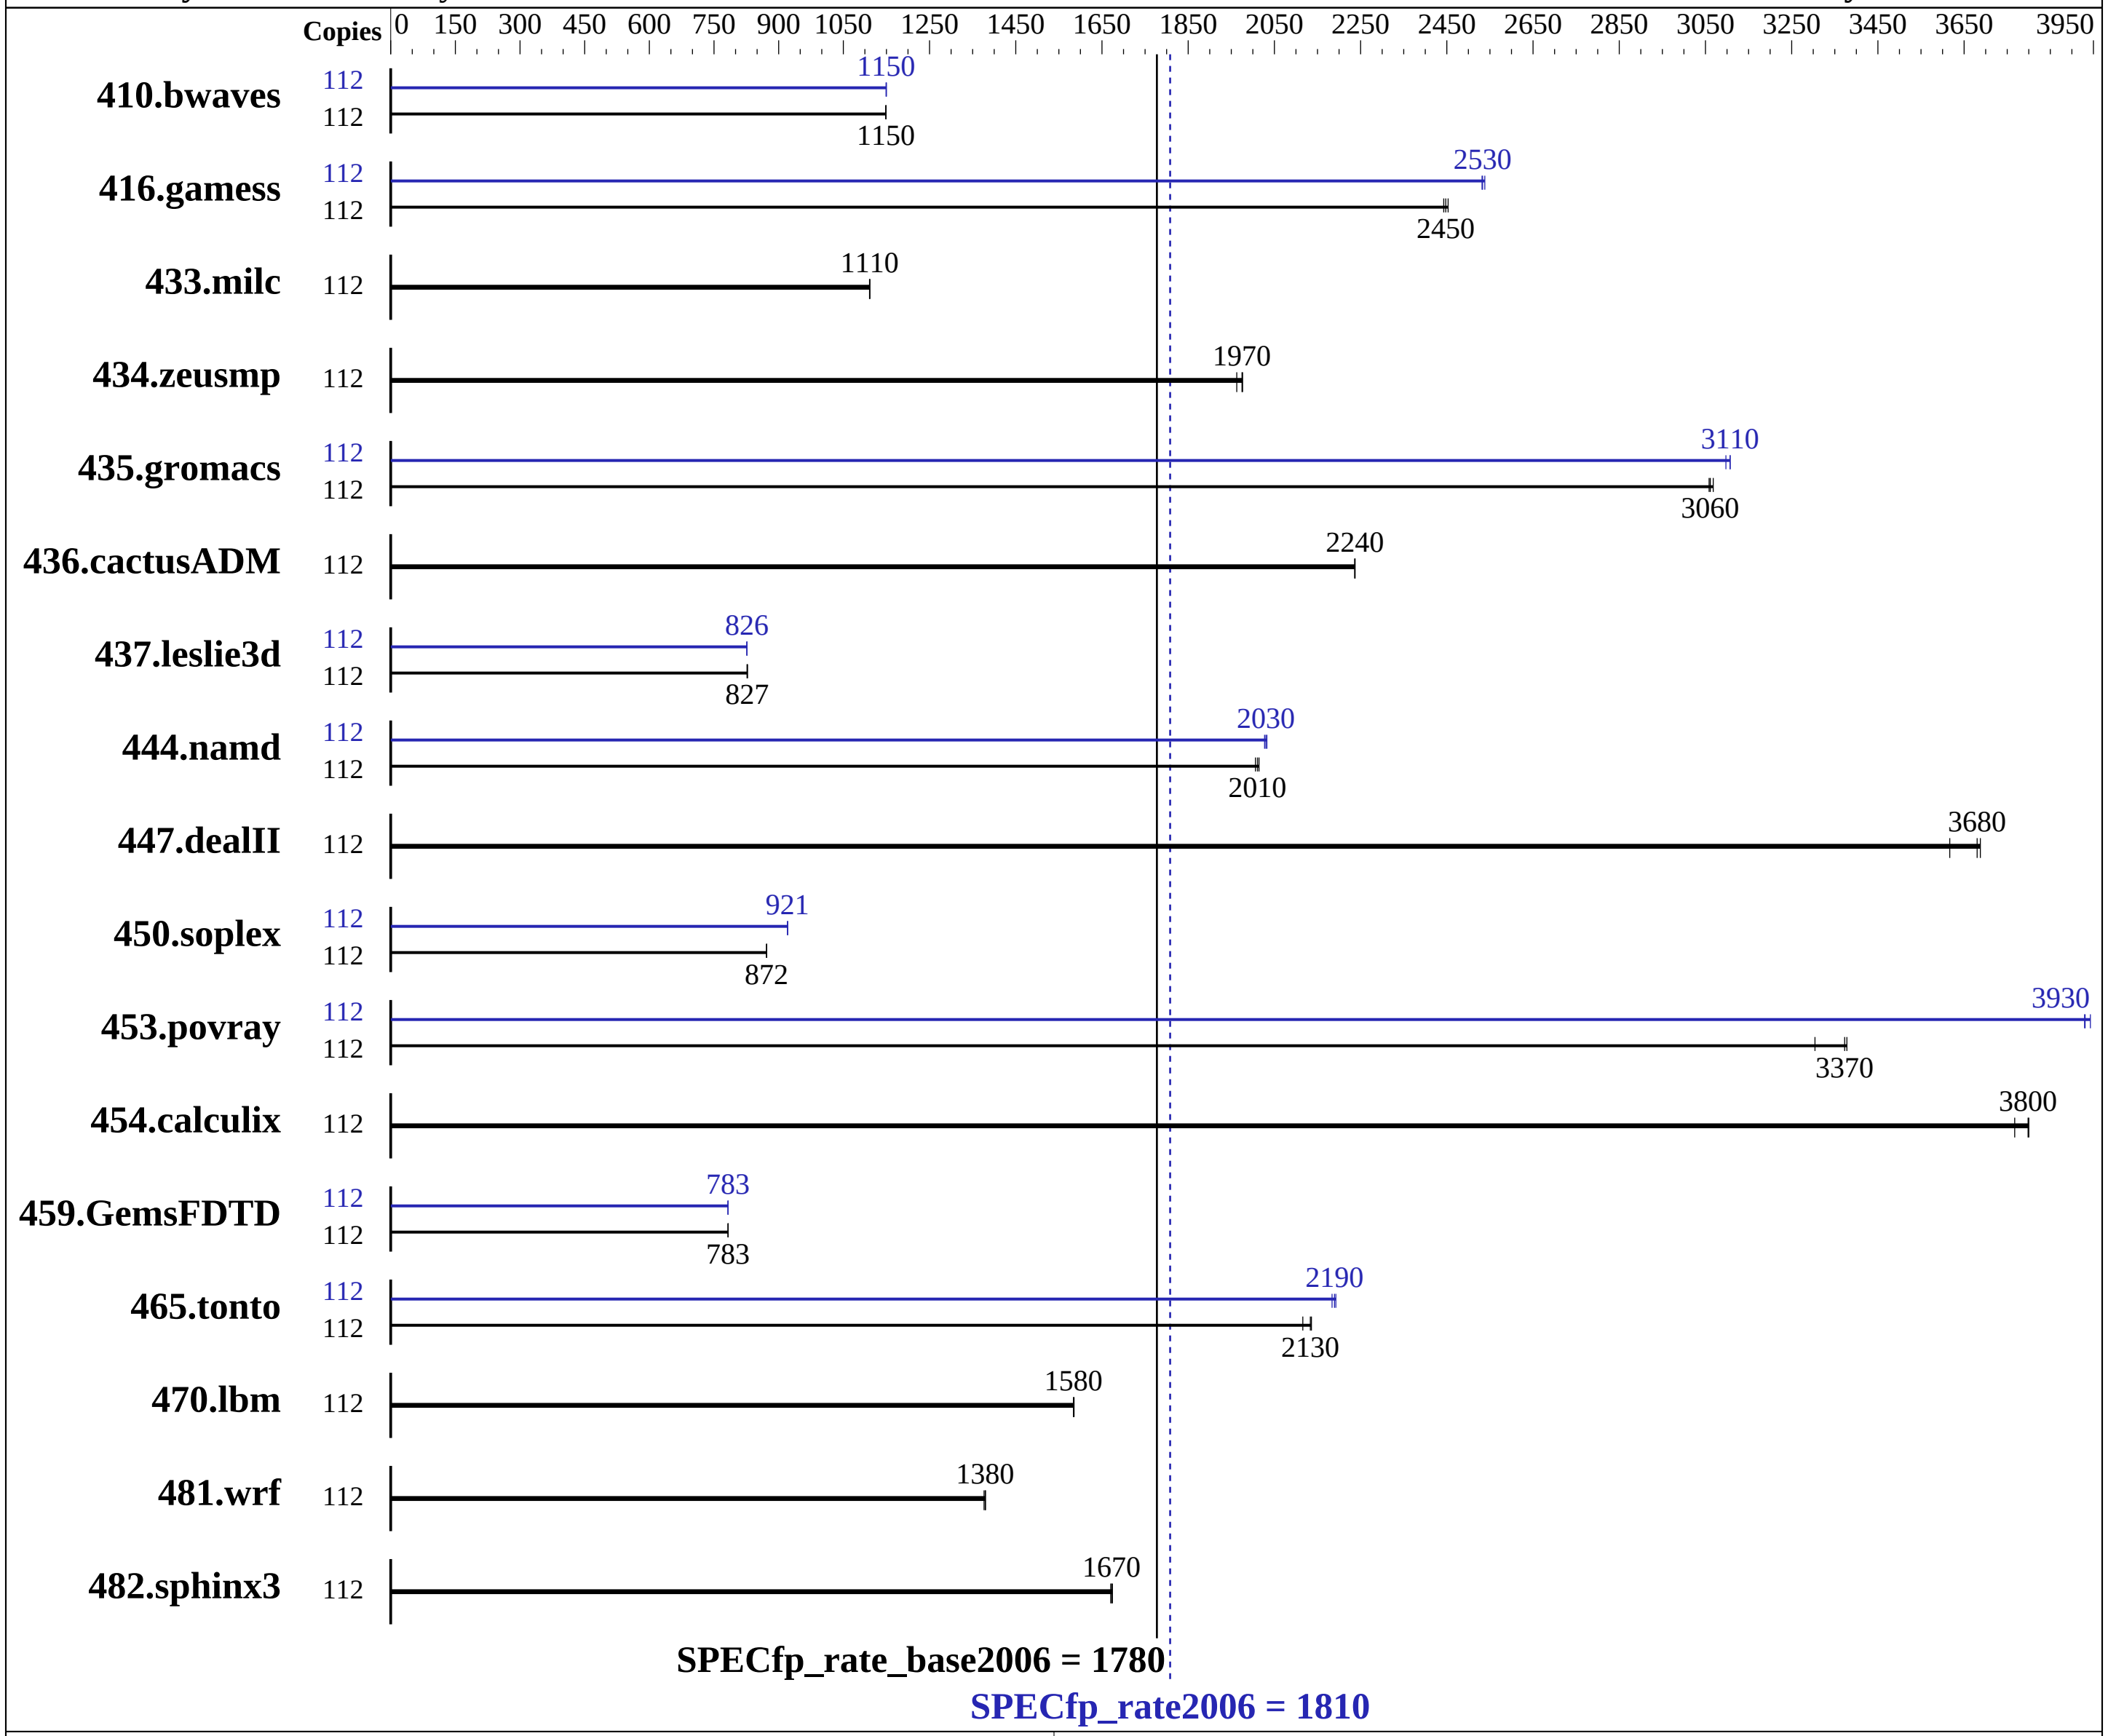

Hardware

CPU Name:	Intel Xeon Platinum 8180M
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	56 cores, 2 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp_rate2006 = 1810

SPECfp_rate_base2006 = 1780

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Jul-2017

L3 Cache:	38.5 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	1 x 1 TB SAS HDD, 7.2K RPM
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	**1325**	**1150**	1325	1150	1325	1150	112	1325	1150	1324	1150	**1324**	**1150**
416.gamess	112	894	2450	**896**	**2450**	898	2440	112	864	2540	**866**	**2530**	866	2530
433.milc	112	925	1110	**925**	**1110**	926	1110	112	925	1110	**925**	**1110**	926	1110
434.zeusmp	112	**516**	**1970**	519	1960	516	1980	112	**516**	**1970**	519	1960	516	1980
435.gromacs	112	**261**	**3060**	261	3060	261	3070	112	257	3110	**257**	**3110**	258	3100
436.cactusADM	112	599	2240	598	2240	**598**	**2240**	112	599	2240	598	2240	**598**	**2240**
437.leslie3d	112	**1273**	**827**	1274	827	1272	828	112	**1274**	**826**	1274	826	1274	827
444.namd	112	**447**	**2010**	448	2010	446	2010	112	442	2030	**442**	**2030**	443	2030
447.dealII	112	354	3620	347	3690	**348**	**3680**	112	354	3620	347	3690	**348**	**3680**
450.soplex	112	**1071**	**872**	1071	872	1071	872	112	1014	921	**1015**	**921**	1015	921
453.povray	112	176	3380	180	3300	**177**	**3370**	112	151	3940	152	3930	**152**	**3930**
454.calculix	112	243	3800	245	3770	**243**	**3800**	112	243	3800	245	3770	**243**	**3800**
459.GemsFDTD	112	1519	783	1518	783	**1518**	**783**	112	1518	783	**1518**	**783**	1519	782
465.tonto	112	**517**	**2130**	521	2120	516	2140	112	505	2180	**503**	**2190**	503	2190
470.lbm	112	972	1580	**971**	**1580**	971	1590	112	972	1580	**971**	**1580**	971	1590
481.wrf	112	909	1380	**907**	**1380**	907	1380	112	909	1380	**907**	**1380**	907	1380
482.sphinx3	112	1304	1670	**1305**	**1670**	1307	1670	112	1304	1670	**1305**	**1670**	1307	1670

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
```

Continued on next page

Platform Notes (Continued)

```
    Power Performance Tuning set to OS Controls
    SNC set to Enabled
    IMC Interleaving set to 1-way Interleave
    Patrol Scrub set to Disabled
     Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
     Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
     running on linux-uezu Tue Dec 19 06:23:40 2017

     This section contains SUT (System Under Test) info as seen by
     some common utilities.  To remove or add to this section, see:
       http://www.spec.org/cpu2006/Docs/config.html#sysinfo

     From /proc/cpuinfo
        model name : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
           2 "physical id"s (chips)
           112 "processors"
        cores, siblings (Caution: counting these is hw and system dependent.  The
        following excerpts from /proc/cpuinfo might not be reliable.  Use with
        caution.)
           cpu cores : 28
           siblings  : 56
           physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
           25 26 27 28 29 30
           physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
           25 26 27 28 29 30
        cache size : 39424 KB

     From /proc/meminfo
        MemTotal:       394831556 kB
        HugePages_Total:       0
        Hugepagesize:       2048 kB

     From /etc/*release* /etc/*version*
        SuSE-release:
           SUSE Linux Enterprise Server 12 (x86_64)
           VERSION = 12
           PATCHLEVEL = 2
           # This file is deprecated and will be removed in a future service pack or
           release.
           # Please check /etc/os-release for details about this release.
        os-release:
           NAME="SLES"
           VERSION="12-SP2"
           VERSION_ID="12.2"
           PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
           ID="sles"
           ANSI_COLOR="0;32"
           CPE_NAME="cpe:/o:suse:sles:12:sp2"

     uname -a:
        Linux linux-uezu 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
        (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Dec 31 19:29

 SPEC is set to: /home/cpu2006-1.2
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda1      xfs   894G  155G  739G  18% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Cisco Systems, Inc. B200M5.3.2.1d.5.0727171353 07/27/2017
   Memory:
    24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on
past performance using the historical hardware and/or
software described on this result page.

The system as described on this result page was formerly
generally available.  At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://www.spec.org/osg/policy.html

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
```

Continued on next page

General Notes (Continued)

and software available as of the publication date.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`
`-qopt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-D_FILE_OFFSET_BITS=64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp_rate2006 = 1810

SPECfp_rate_base2006 = 1780

CPU2006 license: 9019 **Test date:** Dec-2017
Test sponsor: Cisco Systems **Hardware Availability:** Aug-2017
Tested by: Cisco Systems **Software Availability:** Jul-2017

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml