Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Platinum 8164 2.00GHz

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 2350

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

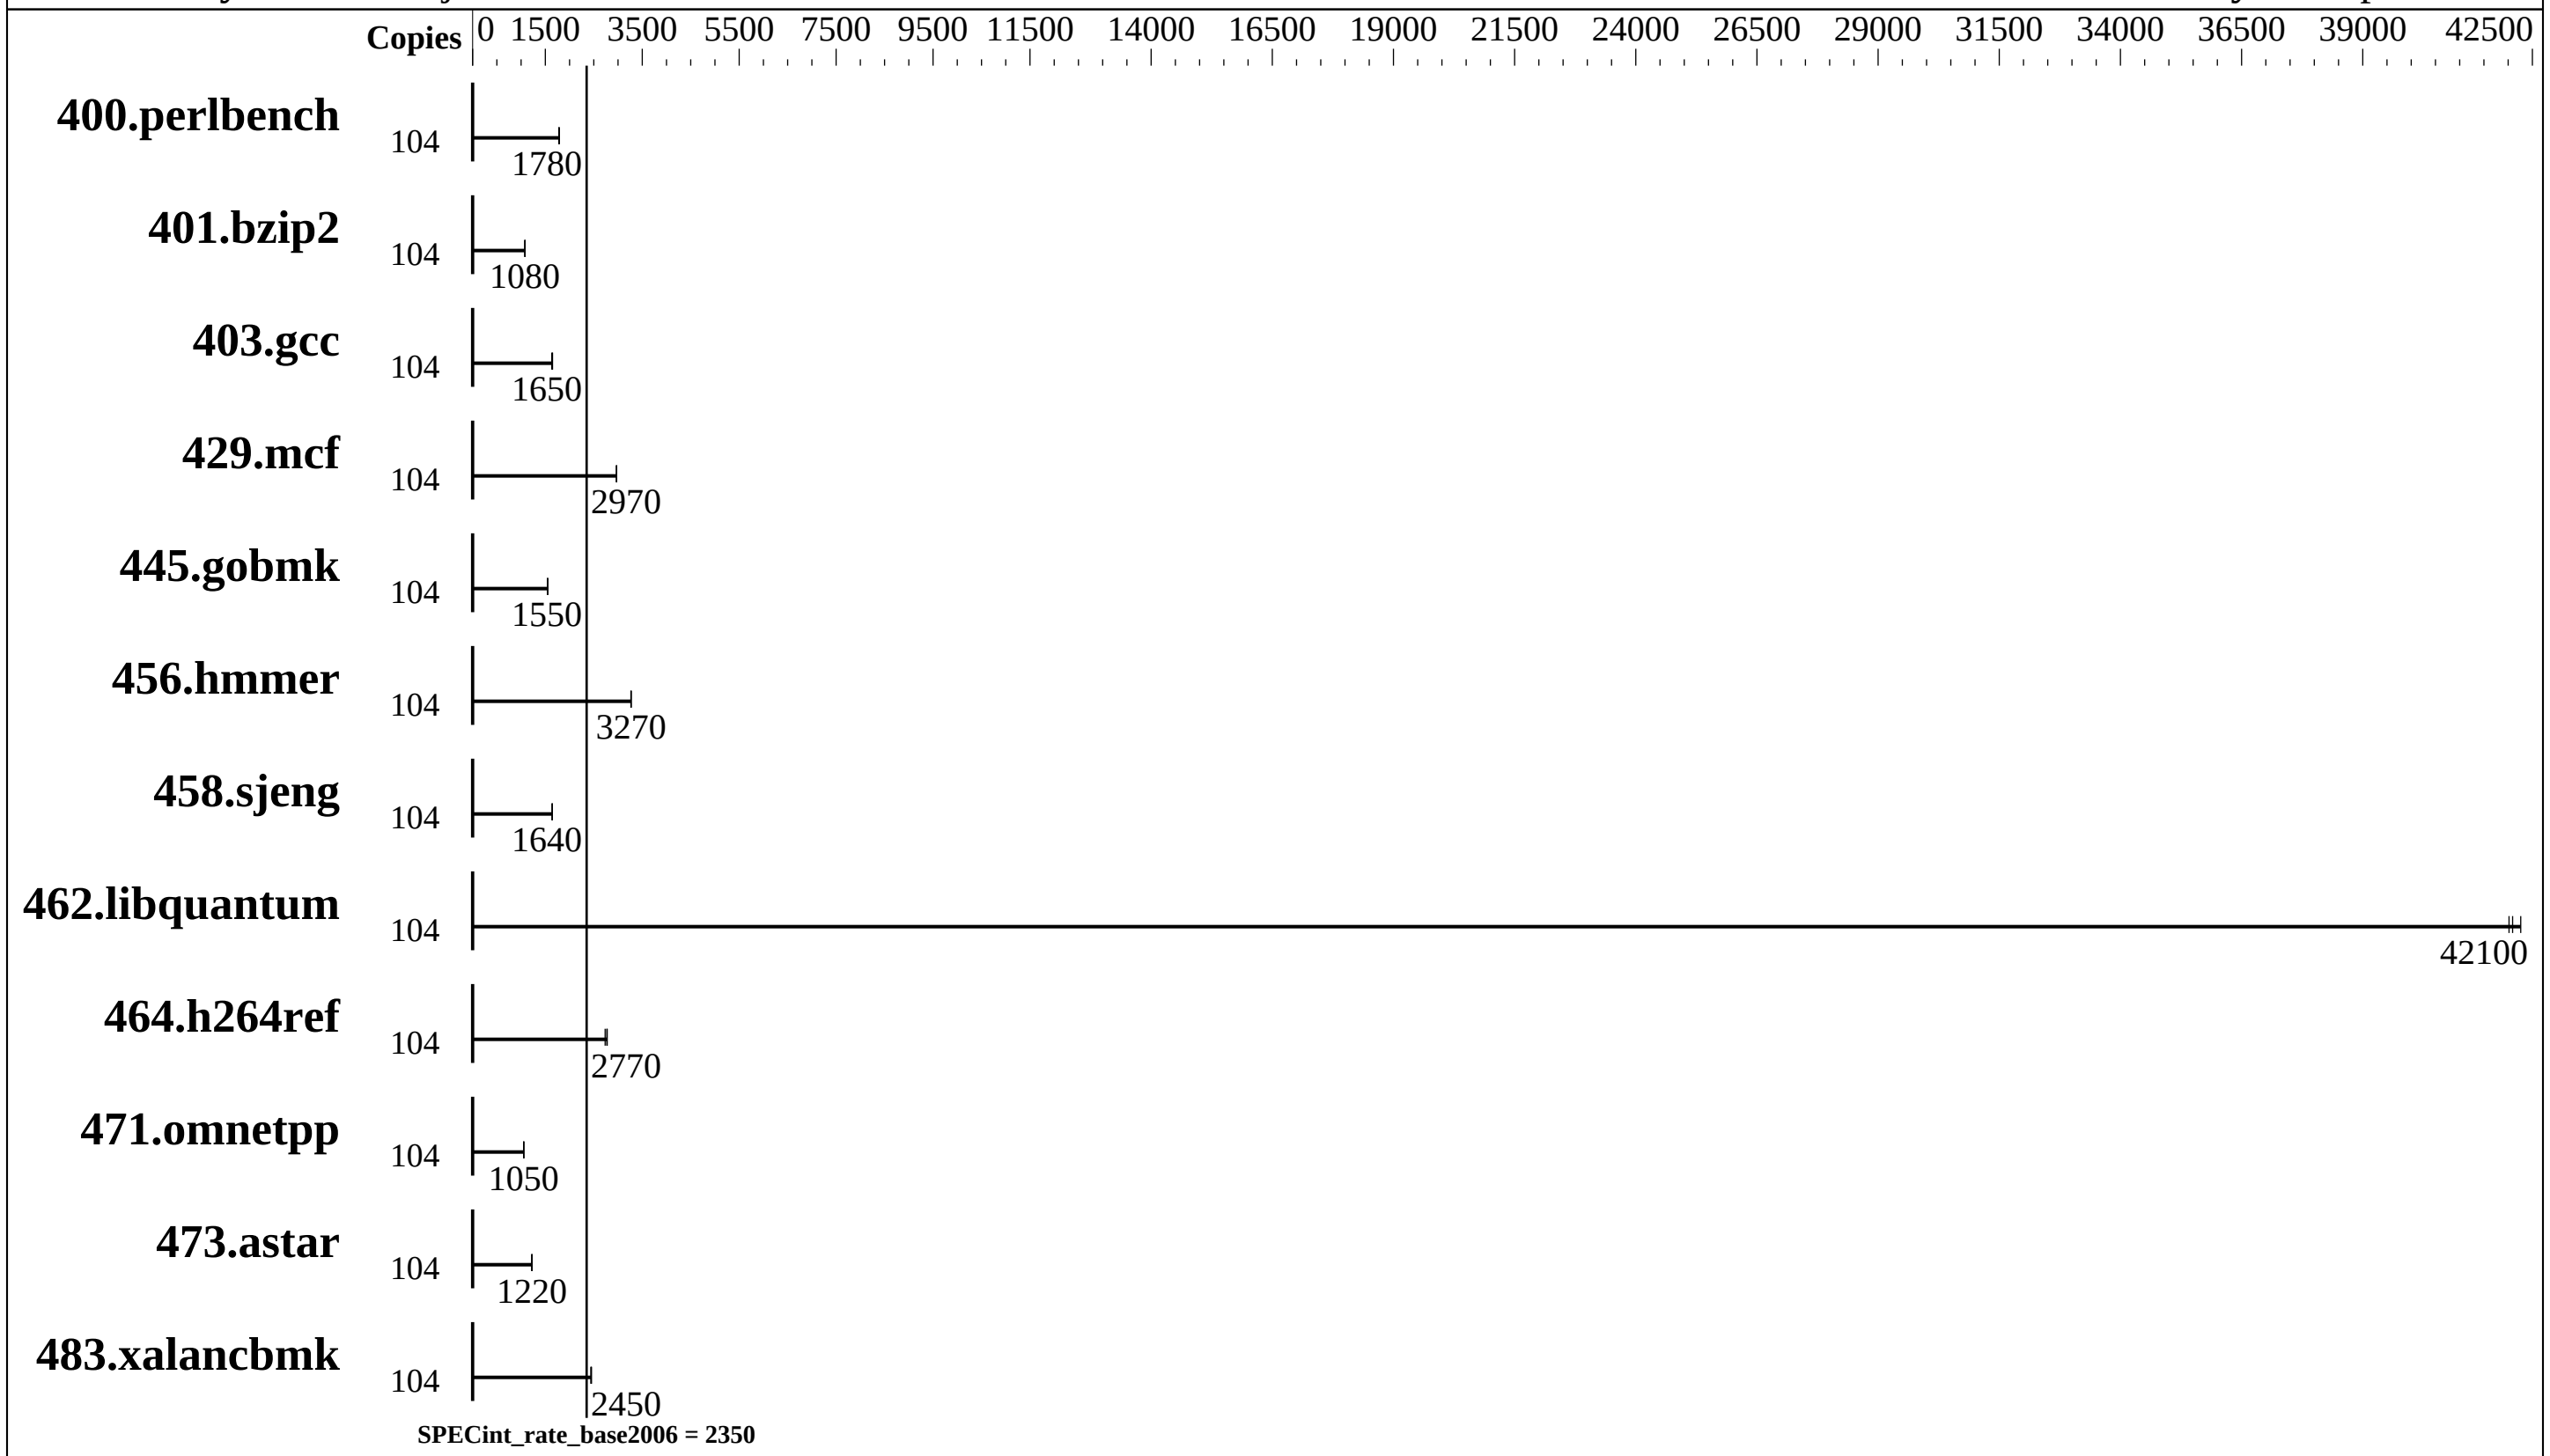

Hardware

CPU Name:	Intel Xeon Platinum 8164
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	52 cores, 2 chips, 26 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	35.75 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	1 x SATA HDD, 1000 GB, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Platinum 8164 2.00GHz

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 2350

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu
Test date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	104	**571**	**1780**	567	1790	571	1780							
401.bzip2	104	932	1080	927	1080	**930**	**1080**							
403.gcc	104	508	1650	513	1630	**509**	**1650**							
429.mcf	104	319	2970	**319**	**2970**	320	2970							
445.gobmk	104	704	1550	**705**	**1550**	705	1550							
456.hmmer	104	297	3270	**297**	**3270**	297	3270							
458.sjeng	104	**766**	**1640**	767	1640	766	1640							
462.libquantum	104	51.3	42000	**51.2**	**42100**	51.0	42300							
464.h264ref	104	842	2730	829	2780	**831**	**2770**							
471.omnetpp	104	**616**	**1050**	616	1060	617	1050							
473.astar	104	597	1220	597	1220	**597**	**1220**							
483.xalancbmk	104	293	2450	**293**	**2450**	294	2440							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter : nohz_full=1-103
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

Platform Notes

```
BIOS configuration:
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Link Frequency Select = 10.4 GT/s
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
```

Continued on next page

Platform Notes (Continued)

```
Fan Control = Full
Sysinfo program /home/Benchmark/speccpu-icc18-20171020/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on TX2550M4 Tue Dec 19 17:40:16 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
      2 "physical id"s (chips)
      104 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 26
      siblings  : 52
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
   cache size : 36608 KB

From /proc/meminfo
   MemTotal:       394412136 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux TX2550M4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Dec 19 17:36

 SPEC is set to: /home/Benchmark/speccpu-icc18-20171020
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   889G   44G  846G   5% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.13.0 for D3386-A1x
   11/02/2017
   Memory:
    12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu-icc18-20171020/icc2018lib/ia32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu-icc18-20171020/icc2018lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu-icc18-20171020/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2018.0.128/linux/compiler/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2018.0.128/linux/compiler/lib/ia32
```

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 11:54:52 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 January 2018.