SPEC® CINT2006 Result

Fujitsu

PRIMERGY RX2520 M4, Intel Xeon Gold 5120 2.20GHz

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 1350

CPU2006 license:	19	**Test date:**	Dec-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Nov-2017
Tested by:	Fujitsu	**Software Availability:**	Sep-2017

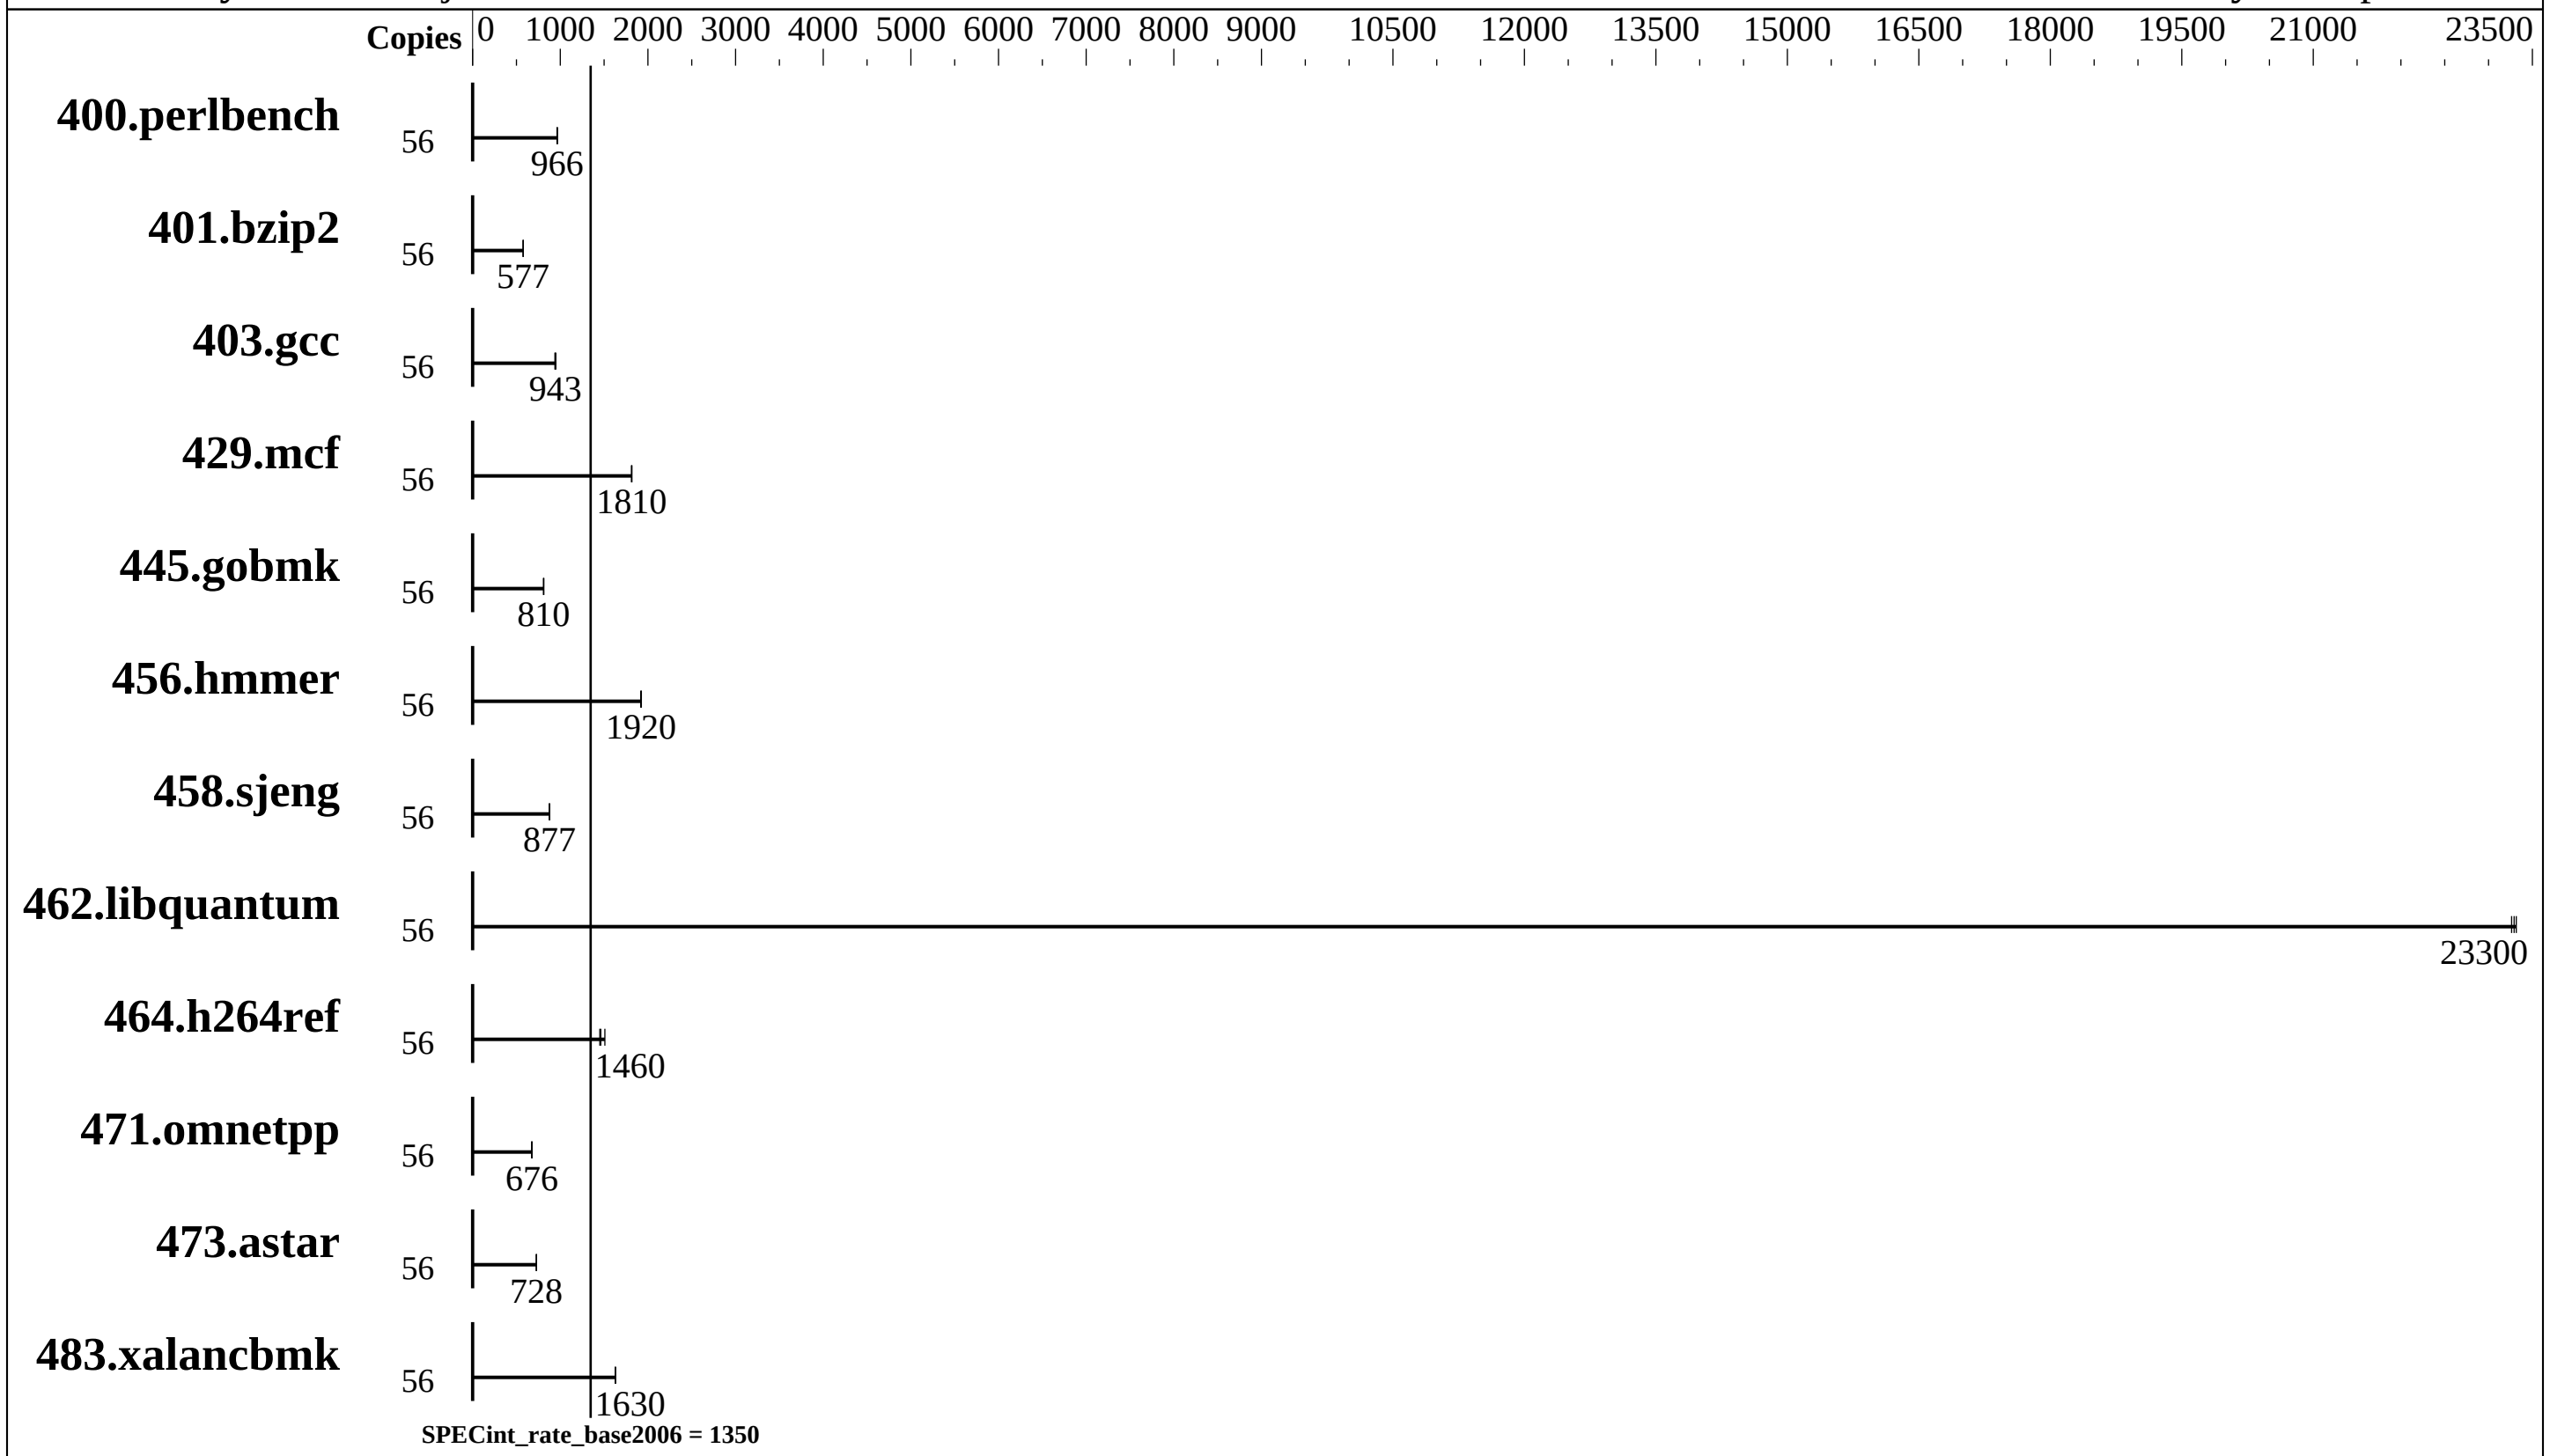

Hardware

CPU Name:	Intel Xeon Gold 5120
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	19.25 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Disk Subsystem:	384 GB tmpfs
Other Hardware:	1 x SATA HDD, 1000 GB, 7200 RPM, used for swap

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	566	967	**567**	**966**	568	963							
401.bzip2	56	936	577	937	577	**937**	**577**							
403.gcc	56	**478**	**943**	475	949	480	939							
429.mcf	56	281	1820	**281**	**1810**	282	1810							
445.gobmk	56	725	811	725	810	**725**	**810**							
456.hmmer	56	272	1920	271	1930	**272**	**1920**							
458.sjeng	56	**773**	**877**	773	876	773	877							
462.libquantum	56	49.9	23300	**49.8**	**23300**	49.8	23300							
464.h264ref	56	821	1510	854	1450	**847**	**1460**							
471.omnetpp	56	518	676	**518**	**676**	518	675							
473.astar	56	540	727	540	729	**540**	**728**							
483.xalancbmk	56	237	1630	237	1630	**237**	**1630**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter:  nohz_full=1-55
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=384g,rw tmpfs /home/memory
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

Platform Notes

```
BIOS configuration:
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Link Frequency Select = 10.4 GT/s
Sub NUMA Clustering = Enabled
```

Continued on next page

Platform Notes (Continued)

```
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on TX2550M4 Tue Dec 12 10:03:58 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
      2 "physical id"s (chips)
      56 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 14
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
   cache size : 19712 KB

From /proc/meminfo
   MemTotal:       394412872 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux TX2550M4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Dec 12 08:31

 SPEC is set to: /home/memory/speccpu
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  384G  4.9G  380G   2% /home/memory
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.13.0 for D3386-A1x
   11/02/2017
   Memory:
    12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz, configured at 2400 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/icc2018lib/ia32:/home/memory/speccpu/icc2018lib/intel64:/home/memory/speccpu/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/compilers_and_libraries_2018.0.128/linux/compiler/lib/ia32`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2018.0.128/linux/compiler/lib/ia32`

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Base Portability Flags (Continued)

403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 11:54:52 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 January 2018.