SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sun Microsystems

(Test Sponsor: Oracle Corporation)

Sun Fire V490

SPECspeed®2017_int_base =	1.00
SPECspeed®2017_int_energy_base =	1.00
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	--

CPU2017 License: 6
Test Sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test Date: Dec-2016
Hardware Availability: Feb-2007
Software Availability: Jul-2016

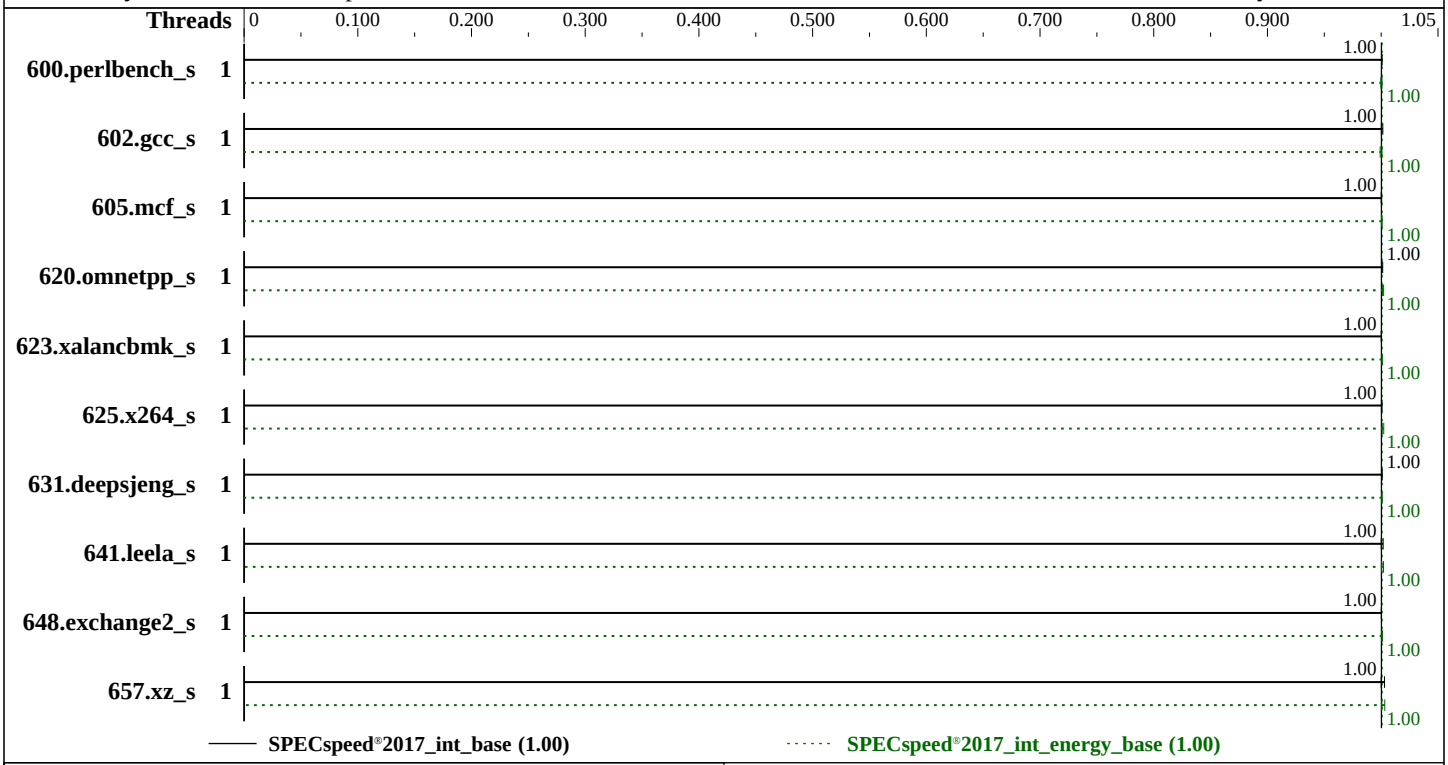

Hardware

CPU Name:	UltraSPARC-IV+
Max MHz:	2100
Nominal:	2100
Enabled:	8 cores, 4 chips
Orderable:	2 or 4 chips
Cache L1:	64 KB I + 64 KB D on chip per core
L2:	2 MB I+D on chip per chip
L3:	32 MB I+D off chip per chip
Other:	None
Memory:	32 GB (32 x 1 GB SDRAM Registered, ECC, 232-pin, Samsung M323S6459ET2-C1LC2)
Storage:	300 GB ZFS mirror on 2x 15K RPM 300 GB Fibre Channel drives
Other:	None

Software

OS:	Solaris 10 1/13
Compiler:	C/C++/Fortran: Version 12.5 of Oracle Developer Studio
Parallel:	Yes
Firmware:	Sun OpenBoot PROM (patch 121689-02) version 4.22.24, released Feb-2010
File System:	zfs
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	Set to defaults

Power

Max. Power (W):	1141.4
Idle Power (W):	1082.92
Min. Temperature (C):	20.81
Elevation (m):	67
Line Standard:	208 V / 60 Hz / 1 phase / 2 wire

(Continued on next page)

Power (Continued)

Provisioning: Line powered

Power Settings

Management FW: Version 2.2.2 of Sun Remote System Control (RSC)
Memory Mode: Normal

Power-Relevant Hardware

Power Supply:	2 x 1448 W (redundant)
Details:	Type A187 1448 Watt AC Input Power Supply
Backplane:	N/A
Other Storage:	Sun Slimline 8x DVD-ROM (370-4412)
Storage Model #s:	2 x XTC-FC1CF-300G15KZ, connected to on-board FC HBA
NICs Installed:	2 x on-board @ 1 GbE
NICs Enabled (FW/OS):	2 / 1
NICs Connected/Speed:	1 @ 1 Gbps
Other HW Model #s:	None

Power Analyzer

Power Analyzer:	bur-x4170m2-002:8888
Hardware Vendor:	Yokogawa
Model:	WT210
Serial Number:	91GC38245
Input Connection:	Serial over USB
Metrology Institute:	NIST
Calibration By:	Yokogawa USA
Calibration Label:	110316-91GC38245
Calibration Date:	3-Nov-2016
PTDaemon™ Version:	1.8.1 (f3ad5467; 2016-09-07)
Setup Description:	Directly connected
Current Ranges Used:	10A
Voltage Range Used:	300V

Temperature Meter

Temperature Meter:	bur-x4170m2-002:8889
Hardware Vendor:	Digi
Model:	WATCHPORT/H
Serial Number:	--
Input Connection:	USB
PTDaemon Version:	1.8.1 (f3ad5467; 2016-09-07)
Setup Description:	In front of SUT front panel primary air inlet

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	1	1774	1.00	1930	1.00	1090	1100	**1774**	**1.00**	**1920**	**1.00**	**1080**	**1090**						
602.gcc_s	1	3976	1.00	4330	0.999	1090	1110	**3981**	**1.00**	**4330**	**1.00**	**1090**	**1110**						
605.mcf_s	1	**4721**	**1.00**	**5150**	**1.00**	**1090**	**1120**	4719	1.00	5150	1.00	1090	1120						
620.omnetpp_s	1	**1630**	**1.00**	**1770**	**1.00**	**1090**	**1090**	1629	1.00	1770	1.00	1090	1090						
623.xalancbmk_s	1	**1417**	**1.00**	**1540**	**1.00**	**1090**	**1090**	1417	1.00	1540	1.00	1090	1090						
625.x264_s	1	1763	1.00	1910	1.00	1090	1100	**1764**	**1.00**	**1920**	**1.00**	**1090**	**1100**						
631.deepsjeng_s	1	**1432**	**1.00**	**1560**	**1.00**	**1090**	**1130**	1432	1.00	1560	1.00	1090	1130						
641.leela_s	1	1703	1.00	1840	1.00	1080	1090	**1706**	**1.00**	**1850**	**1.00**	**1080**	**1090**						
648.exchange2_s	1	2939	1.00	3200	1.00	1090	1090	**2939**	**1.00**	**3200**	**1.00**	**1090**	**1090**						
657.xz_s	1	**6182**	**1.00**	**6730**	**1.00**	**1090**	**1140**	6164	1.00	6710	1.00	1090	1140						

SPECspeed®2017_int_base = 1.00

SPECspeed®2017_int_energy_base = 1.00

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
/etc/system settings
   The ZFS cache may use 1 to 2 GB:
      zfs:zfs_arc_min=0x40000000
      zfs:zfs_arc_max=0x80000000
   Once every 10 seconds, the page flusher
   may write pages older than 600 seconds:
      autoup=600
      tune_t_fsflushr=10
   Prefer local pages, and allow extra
   memory to manage page metadata:
      lpg_alloc_prefer=1
      tsb_rss_factor=128
```

General Notes

```
Environment variables set by runcpu before the start of the run:
OMP_STACKSIZE = "120M"
```

Platform Notes

```
Sysinfo program /cpu2017/rc4/Docs/sysinfo
Rev: r5007 of 2016-11-15 fc8dc82f217779bedfed4d694d580ba9
running on bur408-84 Fri Dec  2 16:27:34 2016

This section contains SUT (System Under Test) info as seen by some common
utilities.
For more information on this section, see
http://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /usr/sbin/psrinfo
   UltraSPARC-IV+ (portid 0 impl 0x19 ver 0x22 clock 2100 MHz)
   UltraSPARC-IV+ (portid 1 impl 0x19 ver 0x22 clock 2100 MHz)
   UltraSPARC-IV+ (portid 2 impl 0x19 ver 0x22 clock 2100 MHz)
   UltraSPARC-IV+ (portid 3 impl 0x19 ver 0x22 clock 2100 MHz)
   4 chips
   8 threads
   2100 MHz

From kstat:        8 cores

From prtconf: 32768 Megabytes
```

(Continued on next page)

Platform Notes (Continued)

```
 /etc/release:
      Oracle Solaris 10 1/13 s10s_u11wos_24a SPARC
 uname -a:
    SunOS bur408-84 5.10 Generic_147147-26 sun4u sparc SUNW,Sun-Fire-V490

 disk: df -h /cpu2017/rc4
 Filesystem             size   used  avail capacity  Mounted on
 rpool/cpu2017/rc4      213G   1.2G   137G     1%    /cpu2017/rc4

 (End of data from sysinfo program)
```

Power Settings Notes

```
Device power management is disabled by default for server systems.
The UltraSPARC IV+ CPU does not support power management.
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
        | 625.x264_s(base) 657.xz_s(base)
------------------------------------------------------------------------------
cc: Studio 12.5 Sun C 5.14 SunOS_sparc 2016/05/31
cc: Warning: -xchip=native detection failed, falling back to -xchip=generic
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
        | 641.leela_s(base)
------------------------------------------------------------------------------
CC: Studio 12.5 Sun C++ 5.14 SunOS_sparc 2016/05/31
CC: Warning: -xchip=native detection failed, falling back to -xchip=generic
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base)
------------------------------------------------------------------------------
f90: Studio 12.5 Fortran 95 8.8 SunOS_sparc 2016/05/31
f90: Warning: -xchip=native detection failed, falling back to -xchip=generic
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f95

Base Portability Flags

600.perlbench_s: -DSPEC_SOLARIS_SPARC -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_GCC_MANGLE -DSPEC_LP64
623.xalancbmk_s: -DSPEC_SOLARIS -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-fast -xpagesize=4M -xprefetch_level=3 -xarch=sparcvis2
-xcache=64/32/4/1:2048/64/4/2:32768/64/4/2 -g1 -m64 -DSPEC_OPENMP
-xopenmp

C++ benchmarks:
-std=c++03 -fast -xpagesize=4M -xprefetch_level=3 -xarch=sparcvis2
-xcache=64/32/4/1:2048/64/4/2:32768/64/4/2 -g -m64 -DSPEC_OPENMP
-xopenmp

Fortran benchmarks:
-fast -xpagesize=4M -xprefetch_level=3 -xarch=sparcvis2
-xcache=64/32/4/1:2048/64/4/2:32768/64/4/2 -g1 -DSPEC_OPENMP -m64
-xopenmp

Base Other Flags

C benchmarks:
`-xjobs=6 -errfmt`

C++ benchmarks:
`-xjobs=6`

Fortran benchmarks:
`-xjobs=6`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Oracle-Solaris-Studio12.5.html`
`http://www.spec.org/cpu2017/flags/Oracle-SPARC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Oracle-Solaris-Studio12.5.xml`
`http://www.spec.org/cpu2017/flags/Oracle-SPARC.xml`

PTDaemon, SPEC CPU, and SPECspeed are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v0.904.0 on 2016-12-02 16:27:31-0500.
Report generated on 2019-09-11 09:48:53 by CPU2017 PS formatter v6255.
Originally published on 2017-06-19.