



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.00 GHz, Intel Xeon Platinum 8158)

SPECspeed2017_fp_base = 150

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

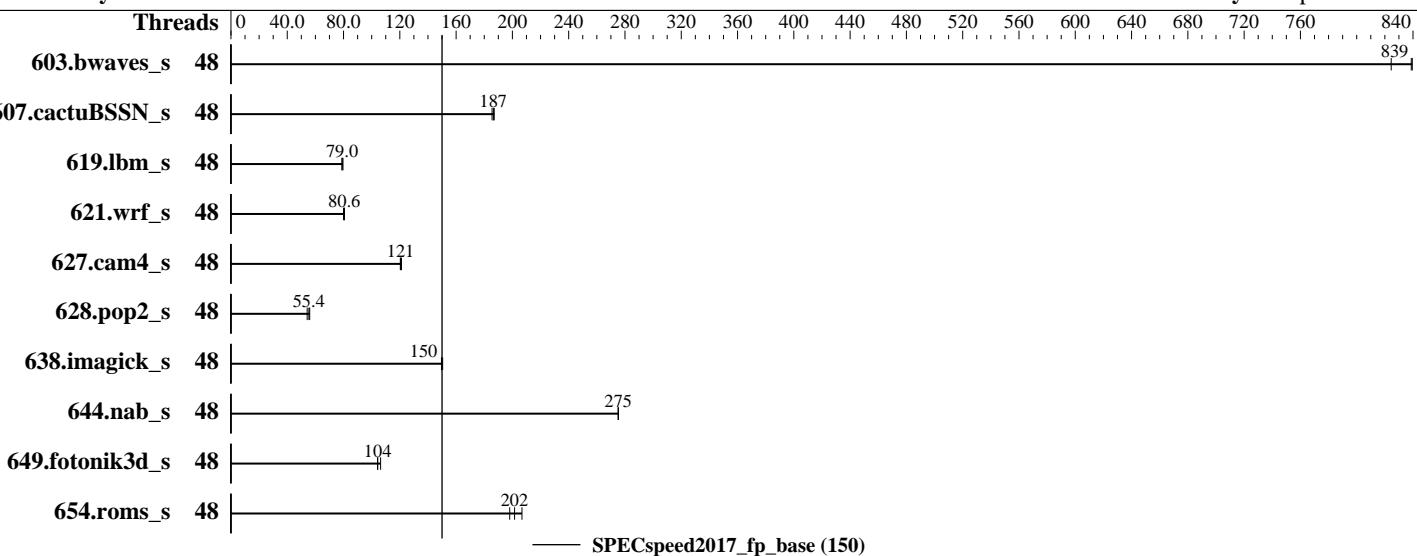

Hardware

CPU Name: Intel Xeon Platinum 8158
 Max MHz.: 3700
 Nominal: 3000
 Enabled: 48 cores, 4 chips
 Orderable: 1, 2, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 480 GB SSD SATA, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3
 Compiler: Kernel 4.4.73-5-default
 C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version U34 released Oct-2017 (tested with U34 9/29/2017)
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.00 GHz, Intel Xeon Platinum 8158)

SPECspeed2017_fp_base = 150

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Date: Oct-2017

Test Sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Sep-2017

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|--|---------|-------------|-------------|-------------|-------------|-------------|-------------|-------|---------|-------|---------|---------|-------|---------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds |
| 603.bwaves_s | 48 | 71.6 | 825 | 70.3 | 839 | 70.3 | 839 | | | | | | | |
| 607.cactuBSSN_s | 48 | 89.8 | 186 | 89.4 | 187 | | 89.1 | 187 | | | | | | |
| 619.lbm_s | 48 | 66.3 | 79.0 | 66.4 | 78.9 | | 65.8 | 79.6 | | | | | | |
| 621.wrf_s | 48 | 165 | 80.0 | 164 | 80.6 | | 164 | 80.7 | | | | | | |
| 627.cam4_s | 48 | 73.5 | 121 | 73.1 | 121 | | 73.6 | 120 | | | | | | |
| 628.pop2_s | 48 | 212 | 56.0 | 219 | 54.2 | 214 | 55.4 | | | | | | | |
| 638.imagick_s | 48 | 96.3 | 150 | 95.9 | 150 | | 96.4 | 150 | | | | | | |
| 644.nab_s | 48 | 63.5 | 275 | 63.5 | 275 | 63.5 | 275 | | | | | | | |
| 649.fotonik3d_s | 48 | 87.5 | 104 | 85.7 | 106 | 87.4 | 104 | | | | | | | |
| 654.roms_s | 48 | 78.1 | 202 | 79.5 | 198 | | 76.1 | 207 | | | | | | |
| SPECspeed2017_fp_base = 150 | | | | | | | | | | | | | | |
| SPECspeed2017_fp_peak = Not Run | | | | | | | | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"
```

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetcher set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Enabled

Workload Pofile set to General Peak Frequency Compute

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

| | |
|---|--|
| Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (3.00 GHz, Intel Xeon Platinum 8158) | SPECspeed2017_fp_base = 150 |
| | SPECspeed2017_fp_peak = Not Run |
| CPU2017 License: 3 | Test Date: Oct-2017 |
| Test Sponsor: HPE | Hardware Availability: Oct-2017 |
| Tested by: HPE | Software Availability: Sep-2017 |

Platform Notes (Continued)

Energy/Performance Bias set to Maximum Performance

Uncore Frequency Scaling set to Auto

Workload Pofile set to General Peak Frequency Compute

NUMA Group Size Optimization set to Flat

```
Sysinfo program /cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on DL560-Gen10 Fri Oct 20 16:18:43 2017
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz
        4 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 12
    siblings : 12
    physical 0: cores 0 1 3 9 10 16 18 19 24 25 26 27
    physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
    physical 2: cores 0 1 2 3 4 9 10 16 18 19 25 26
    physical 3: cores 0 1 2 3 4 9 10 16 18 19 25 26
```

From lscpu:

| | |
|----------------------|--|
| Architecture: | x86_64 |
| CPU op-mode(s): | 32-bit, 64-bit |
| Byte Order: | Little Endian |
| CPU(s): | 48 |
| On-line CPU(s) list: | 0-47 |
| Thread(s) per core: | 1 |
| Core(s) per socket: | 12 |
| Socket(s): | 4 |
| NUMA node(s): | 4 |
| Vendor ID: | GenuineIntel |
| CPU family: | 6 |
| Model: | 85 |
| Model name: | Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz |
| Stepping: | 4 |
| CPU MHz: | 3000.000 |
| BogoMIPS: | 6006.11 |
| Virtualization: | VT-x |
| L1d cache: | 32K |
| L1i cache: | 32K |
| L2 cache: | 1024K |

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.00 GHz, Intel Xeon Platinum 8158)

SPECspeed2017_fp_base = 150

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

| | |
|--------------------|--------|
| L3 cache: | 25344K |
| NUMA node0 CPU(s): | 0-11 |
| NUMA node1 CPU(s): | 12-23 |
| NUMA node2 CPU(s): | 24-35 |
| NUMA node3 CPU(s): | 36-47 |

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 196266 MB
node 0 free: 191252 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 196608 MB
node 1 free: 191756 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35
node 2 size: 196608 MB
node 2 free: 191451 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47
node 3 size: 196607 MB
node 3 free: 190075 MB
node distances:
node 0 1 2 3
 0: 10 21 21 21
 1: 21 10 21 21
 2: 21 21 10 21
 3: 21 21 21 10
```

From /proc/meminfo

```
MemTotal: 792074900 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

| | |
|---|---|
| Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (3.00 GHz, Intel Xeon Platinum 8158) | SPECspeed2017_fp_base = 150 SPECspeed2017_fp_peak = Not Run |
| CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE | Test Date: Oct-2017 Hardware Availability: Oct-2017 Software Availability: Sep-2017 |

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux DL560-Gen10 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 20 11:54
```

```
SPEC is set to: /cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        xfs   447G   32G  416G   7%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U34 09/29/2017
```

```
Memory:
```

```
48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
FC 607.cactubSSN_s(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

| | |
|---|---|
| Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (3.00 GHz, Intel Xeon Platinum 8158) | SPECspeed2017_fp_base = 150 SPECspeed2017_fp_peak = Not Run |
| CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE | Test Date: Oct-2017 Hardware Availability: Oct-2017 Software Availability: Sep-2017 |

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

| | |
|---|---|
| Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (3.00 GHz, Intel Xeon Platinum 8158) | SPECspeed2017_fp_base = 150 SPECspeed2017_fp_peak = Not Run |
| CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE | Test Date: Oct-2017 Hardware Availability: Oct-2017 Software Availability: Sep-2017 |

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.00 GHz, Intel Xeon Platinum 8158)

SPECspeed2017_fp_base = 150

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-20 17:18:43-0400.

Report generated on 2018-10-31 12:56:32 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-14.