# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_int_base = 8.91

SPECspeed2017_int_peak = 9.11

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2017
**Hardware Availability:** Aug-2017
**Software Availability:** Sep-2017

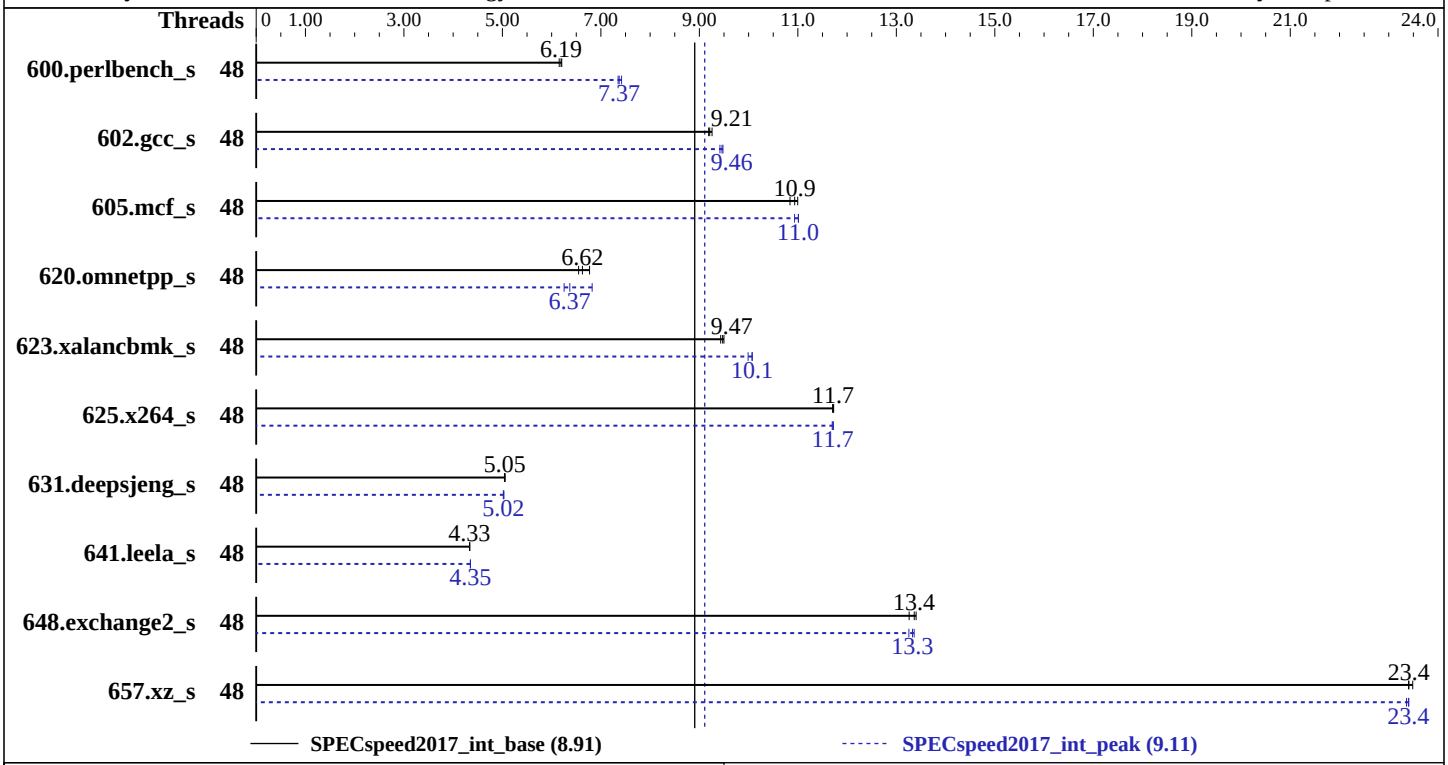


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6136 |
| Max MHz.: | 3700 |
| Nominal: | 3000 |
| Enabled: | 48 cores, 4 chips |
| Orderable: | 2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 24.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R) |
| Storage: | 1 x 800 GB SAS SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP2 (x86_64)<br>Kernel 4.4.21-69-default |
| Compiler: | C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Lenovo BIOS Version IVE111I 1.01 released Aug-2017 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library V5.0.1;<br>jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;<br>jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;<br>jemalloc: sources avilable from jemalloc.net or releases |

# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_int_base = 8.91

SPECspeed2017_int_peak = 9.11

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2017
**Hardware Availability:** Aug-2017
**Software Availability:** Sep-2017

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 48 | 288 | 6.15 | 286 | 6.21 | **287** | **6.19** | 48 | 242 | 7.35 | 239 | 7.42 | **241** | **7.37** |
| 602.gcc_s | 48 | 430 | 9.26 | 433 | 9.19 | **432** | **9.21** | 48 | 423 | 9.42 | **421** | **9.46** | 420 | 9.48 |
| 605.mcf_s | 48 | 429 | 11.0 | 435 | 10.8 | **432** | **10.9** | 48 | 429 | 11.0 | **429** | **11.0** | 432 | 10.9 |
| 620.omnetpp_s | 48 | 241 | 6.77 | **246** | **6.62** | 249 | 6.55 | 48 | 239 | 6.82 | **256** | **6.37** | 261 | 6.25 |
| 623.xalancbmk_s | 48 | 149 | 9.50 | 150 | 9.43 | **150** | **9.47** | 48 | **141** | **10.1** | 141 | 10.1 | 142 | 9.99 |
| 625.x264_s | 48 | 150 | 11.7 | 151 | 11.7 | **151** | **11.7** | 48 | 151 | 11.7 | 150 | 11.7 | **151** | **11.7** |
| 631.deepsjeng_s | 48 | **284** | **5.05** | 284 | 5.04 | 283 | 5.06 | 48 | 286 | 5.02 | **285** | **5.02** | 285 | 5.03 |
| 641.leela_s | 48 | 393 | 4.34 | **394** | **4.33** | 394 | 4.33 | 48 | **392** | **4.35** | 392 | 4.35 | 392 | 4.35 |
| 648.exchange2_s | 48 | **220** | **13.4** | 219 | 13.4 | 222 | 13.3 | 48 | 222 | 13.3 | **221** | **13.3** | 220 | 13.4 |
| 657.xz_s | 48 | 264 | 23.4 | **264** | **23.4** | 263 | 23.5 | 48 | **264** | **23.4** | 264 | 23.4 | 265 | 23.4 |

**SPECspeed2017_int_base = 8.91**

**SPECspeed2017_int_peak = 9.11**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Hyper-Threading set to Disable
DCU Streamer Prefetcher set to Disable
MONITORMWAIT set to Enable
XPT Prefetcher set to Enable
DCA set to Enable
Stale AtoS set to Enable
LLC Deadline Alloc set to Disable
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on SN850 Thu Nov  9 17:29:57 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
      4  "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 12
      siblings  : 12
      physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
      physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
      physical 2: cores 0 1 2 3 4 9 10 16 18 19 25 26
      physical 3: cores 0 1 2 3 4 9 10 16 18 19 25 26

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                48
     On-line CPU(s) list:   0-47
     Thread(s) per core:    1
     Core(s) per socket:    12
     Socket(s):             4
     NUMA node(s):          4
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
     Stepping:              4
     CPU MHz:               2992.975
     BogoMIPS:              5985.95
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              25344K
     NUMA node0 CPU(s):     0-11
     NUMA node1 CPU(s):     12-23
     NUMA node2 CPU(s):     24-35
     NUMA node3 CPU(s):     36-47
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
    node 0 size: 386659 MB
    node 0 free: 385684 MB
    node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
    node 1 size: 387057 MB
    node 1 free: 386141 MB
    node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35
    node 2 size: 387057 MB
    node 2 free: 386033 MB
    node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47
    node 3 size: 387054 MB
    node 3 free: 386082 MB
    node distances:
    node   0   1   2   3
      0:  10  21  21  21
      1:  21  10  21  21
      2:  21  21  10  21
      3:  21  21  21  10

  From /proc/meminfo
     MemTotal:       1584975708 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux SN850 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Nov 9 17:28

 SPEC is set to: /home/cpu2017.1.0.2.ic18.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   836G   20G  816G   3% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[IVE111I-1.01]- 08/11/2017
   Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
      peak) 657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```


**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
     641.leela_s(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

## Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

## Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

**(Continued on next page)**

## Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

## Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

**(Continued on next page)**

## Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

623.xalancbmk_s: `-L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc`

631.deepsjeng_s: `Same as 620.omnetpp_s`

641.leela_s: `Same as 620.omnetpp_s`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

## Peak Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks (except as noted below):
`-m64`

623.xalancbmk_s: `-m32`

Fortran benchmarks:
`-m64`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-09 04:29:56-0500.
Report generated on 2018-10-31 15:56:35 by CPU2017 PS formatter v6067.
Originally published on 2017-12-21.