# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.70 GHz, Intel Xeon Gold 6150)

SPECspeed2017_fp_base = 115

SPECspeed2017_fp_peak = Not Run

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Nov-2017
**Hardware Availability:** Oct-2017
**Software Availability:** Sep-2017

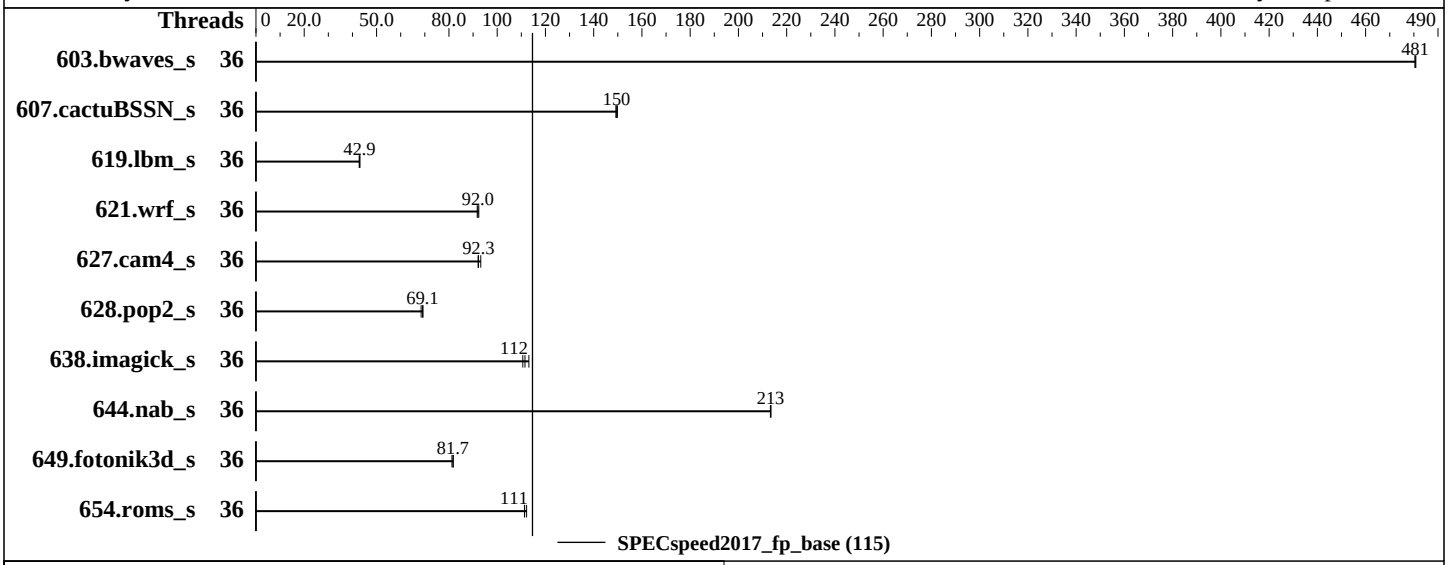


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6150 |
| Max MHz.: | 3700 |
| Nominal: | 2700 |
| Enabled: | 36 cores, 2 chips |
| Orderable: | 1, 2 chip(s) |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 24.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R) |
| Storage: | 1 x 960 GB SATA SSD, RAID 0 |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 (x86_64) SP2<br>Kernel 4.4.21-69-default |
| Compiler: | C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | HPE BIOS Version I42 released Oct-2017 (tested with I42 9/27/2017) |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | None |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 36 | 123 | 481 | 123 | 481 | **123** | **481** | | | | | | | |
| 607.cactuBSSN_s | 36 | **111** | **150** | 111 | 150 | 112 | 149 | | | | | | | |
| 619.lbm_s | 36 | **122** | **42.9** | 122 | 42.8 | 121 | 43.1 | | | | | | | |
| 621.wrf_s | 36 | 143 | 92.4 | 144 | 91.7 | **144** | **92.0** | | | | | | | |
| 627.cam4_s | 36 | **96.1** | **92.3** | 96.3 | 92.1 | 95.1 | 93.2 | | | | | | | |
| 628.pop2_s | 36 | 171 | 69.2 | 173 | 68.5 | **172** | **69.1** | | | | | | | |
| 638.imagick_s | 36 | 130 | 111 | 128 | 113 | **129** | **112** | | | | | | | |
| 644.nab_s | 36 | **81.9** | **213** | 81.8 | 213 | 81.9 | 213 | | | | | | | |
| 649.fotonik3d_s | 36 | **112** | **81.7** | 111 | 81.8 | 112 | 81.2 | | | | | | | |
| 654.roms_s | 36 | 140 | 112 | 141 | 111 | **141** | **111** | | | | | | | |

**SPECspeed2017_fp_base = 115**

**SPECspeed2017_fp_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set wtih "tuned-adm profile throughput-performance"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=core,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
```

## Platform Notes

```
BIOS Configuration:
 Intel Hyperthreading set to Disabled
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Peak Frequency Compute
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 Energy/Performance Bias set to Maximum Performance
Workload Profile set to Custom
 NUMA Group Size Optimization set to Flat
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-0f29 Mon Nov  6 12:28:44 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
      2  "physical id"s (chips)
      36 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 18
      siblings  : 18
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                36
     On-line CPU(s) list:   0-35
     Thread(s) per core:    1
     Core(s) per socket:    18
     Socket(s):             2
     NUMA node(s):          2
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
     Stepping:              4
     CPU MHz:               2693.690
     BogoMIPS:              5387.38
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              25344K
     NUMA node0 CPU(s):     0-17
     NUMA node1 CPU(s):     18-35
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
    node 0 size: 193116 MB
    node 0 free: 189395 MB
    node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
    node 1 size: 193532 MB
    node 1 free: 192122 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       395928244 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP2

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-0f29 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Nov 6 09:52

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   852G   16G  837G   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE I42 08/19/2017
   Memory:
    24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:
```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:
```
-m64 -std=c11
```

Fortran benchmarks:
```
-m64
```

Benchmarks using both Fortran and C:
```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:
```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU2017 v1.0.2 on 2017-11-06 13:28:44-0500.
Report generated on 2018-10-31 14:41:20 by CPU2017 PS formatter v6067.
Originally published on 2017-11-29.