SPEC® CPU2017 Integer Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(2.10 GHz, AMD EPYC 7251)

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = Not Run

CPU2017 License: 3		**Test Date:**	Nov-2017
Test Sponsor:	HPE	**Hardware Availability:**	Nov-2017
Tested by:	HPE	**Software Availability:**	Sep-2017

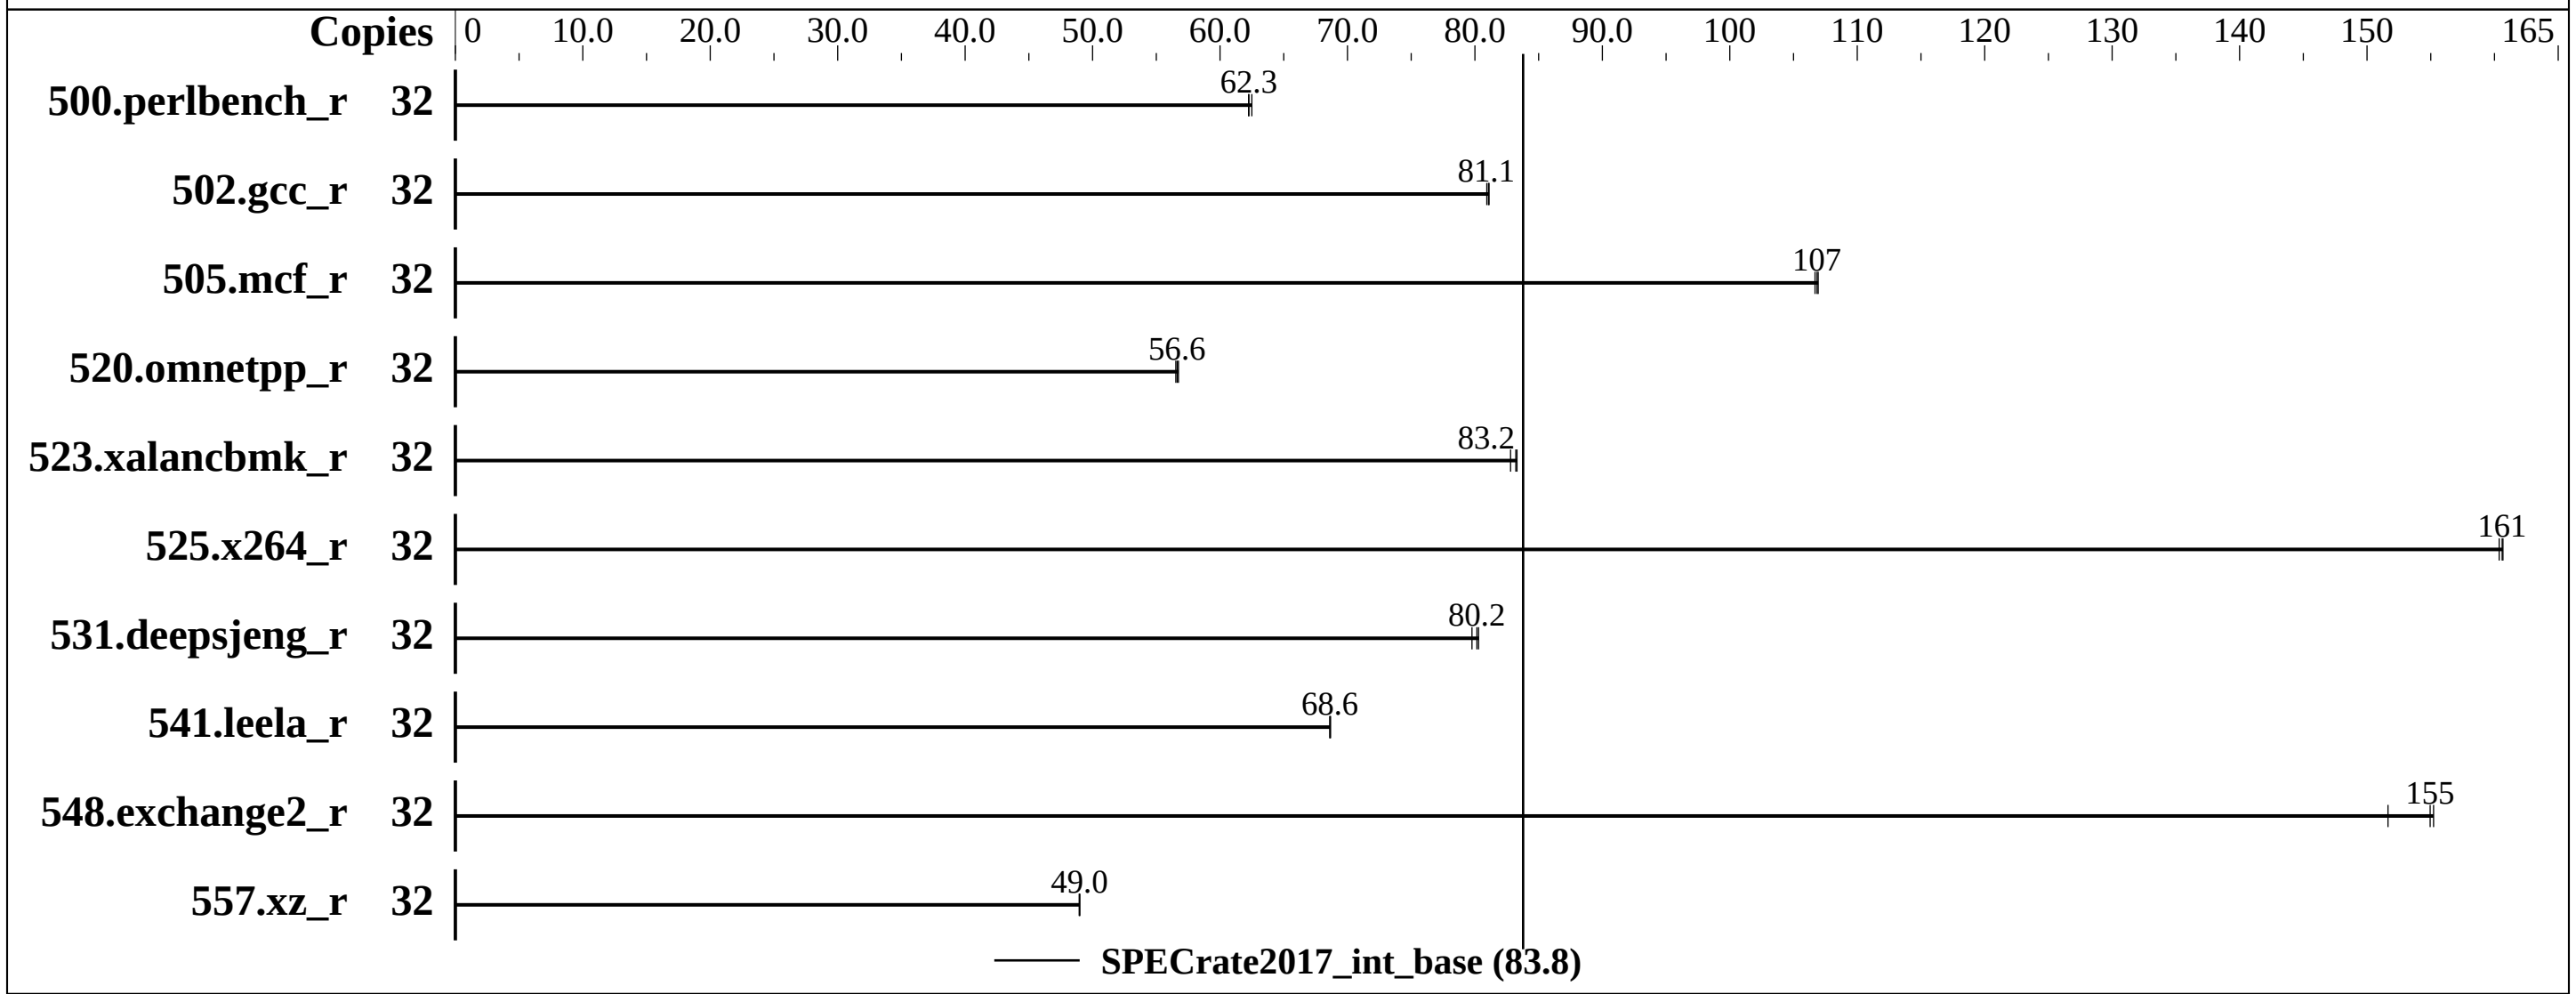

Hardware

CPU Name:	AMD EPYC 7251
Max MHz.:	2900
Nominal:	2100
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L, running at 2400)
Storage:	1 x 400 GB SAS SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.73-5-default
Compiler:	C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	HPE BIOS Version A40 released Nov-2017 (tested with A40 11/10/2017)
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc general purpose malloc implementation v4.5.0

SPEC CPU2017 Integer Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(2.10 GHz, AMD EPYC 7251)

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE
Test Date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	**818**	**62.3**	815	62.5	818	62.2							
502.gcc_r	32	559	81.1	**559**	**81.1**	560	80.9							
505.mcf_r	32	484	107	**484**	**107**	485	107							
520.omnetpp_r	32	740	56.7	743	56.5	**741**	**56.6**							
523.xalancbmk_r	32	**406**	**83.2**	406	83.3	408	82.8							
525.x264_r	32	349	160	349	161	**349**	**161**							
531.deepsjeng_r	32	460	79.8	457	80.3	**458**	**80.2**							
541.leela_r	32	772	68.6	**772**	**68.6**	772	68.7							
548.exchange2_r	32	540	155	553	152	**541**	**155**							
557.xz_r	32	705	49.0	**706**	**49.0**	706	48.9							

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:26"

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
 Minimum Processor Idle Power Core C-State set to C6 State
 Processor Power and Utilization Monitoring set to Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on dl385g10-1 Mon Jun 12 10:00:06 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7251 8-Core Processor
      2  "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)

Platform Notes (Continued)

```
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0
       physical 1: cores 0

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                32
      On-line CPU(s) list:   0-31
      Thread(s) per core:    2
      Core(s) per socket:    8
      Socket(s):             2
      NUMA node(s):          8
      Vendor ID:             AuthenticAMD
      CPU family:            23
      Model:                 1
      Model name:            AMD EPYC 7251 8-Core Processor
      Stepping:              2
      CPU MHz:               2100.000
      CPU max MHz:           2100.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              4191.93
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             64K
      L2 cache:              512K
      L3 cache:              4096K
      NUMA node0 CPU(s):     0,1,16,17
      NUMA node1 CPU(s):     2,3,18,19
      NUMA node2 CPU(s):     4,5,20,21
      NUMA node3 CPU(s):     6,7,22,23
      NUMA node4 CPU(s):     8,9,24,25
      NUMA node5 CPU(s):     10,11,26,27
      NUMA node6 CPU(s):     12,13,28,29
      NUMA node7 CPU(s):     14,15,30,31
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
      clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```


(Continued on next page)

Platform Notes (Continued)

```
/proc/cpuinfo cache data
   cache size : 512 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 16 17
  node 0 size: 128776 MB
  node 0 free: 127772 MB
  node 1 cpus: 2 3 18 19
  node 1 size: 129022 MB
  node 1 free: 128007 MB
  node 2 cpus: 4 5 20 21
  node 2 size: 129022 MB
  node 2 free: 128027 MB
  node 3 cpus: 6 7 22 23
  node 3 size: 129022 MB
  node 3 free: 128018 MB
  node 4 cpus: 8 9 24 25
  node 4 size: 129022 MB
  node 4 free: 128022 MB
  node 5 cpus: 10 11 26 27
  node 5 size: 129022 MB
  node 5 free: 128019 MB
  node 6 cpus: 12 13 28 29
  node 6 size: 129022 MB
  node 6 free: 128001 MB
  node 7 cpus: 14 15 30 31
  node 7 size: 128869 MB
  node 7 free: 127843 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  16  16  16  32  32  32  32
    1:  16  10  16  16  32  32  32  32
    2:  16  16  10  16  32  32  32  32
    3:  16  16  16  10  32  32  32  32
    4:  32  32  32  32  10  16  16  16
    5:  32  32  32  32  16  10  16  16
    6:  32  32  32  32  16  16  10  16
    7:  32  32  32  32  16  16  16  10

From /proc/meminfo
   MemTotal:       1056544904 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux dl385g10-1 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
   x86_64 x86_64 GNU/Linux

run-level 3 Dec 31 19:01

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   331G   28G  304G   9% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE A40 11/10/2017
  Memory:
   16x UNKNOWN NOT AVAILABLE
   16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666, configured at 2400

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

(Continued on next page)

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(2.10 GHz, AMD EPYC 7251)

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Base Portability Flags (Continued)

502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc

Fortran benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-06-12 10:00:03-0400.
Report generated on 2019-02-21 12:44:26 by CPU2017 PS formatter v6067.
Originally published on 2018-01-14.