



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(3.90 GHz, Intel Xeon Gold 6137)

**SPECrate2017\_int\_base = 118**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3


**Test Date:** Dec-2017

Test Sponsor: HPE

**Hardware Availability:** Dec-2017

Tested by: HPE

**Software Availability:** Sep-2017

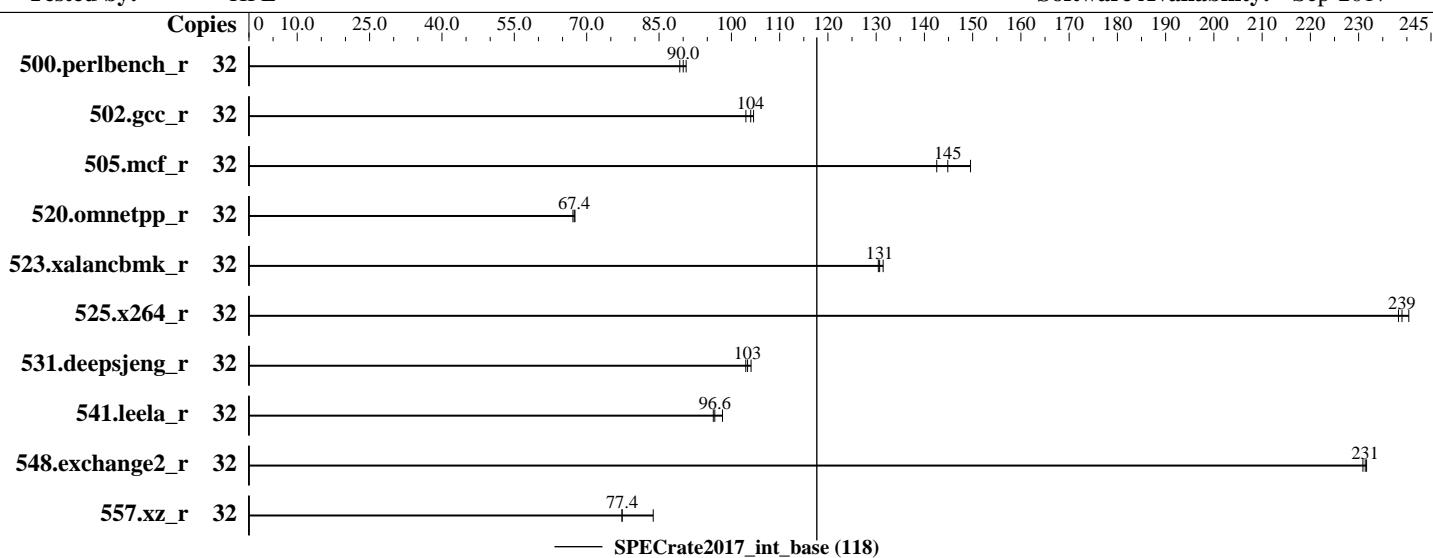

## Hardware

CPU Name: Intel Xeon Gold 6137  
 Max MHz.: 4100  
 Nominal: 3900  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 960 GB SSD SATA, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP2  
 Compiler: Kernel 4.4.21-69-default  
 C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library V5.0.1;  
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or releases



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(3.90 GHz, Intel Xeon Gold 6137)

**SPECrate2017\_int\_base = 118**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Date: Dec-2017

Test Sponsor: HPE

Hardware Availability: Dec-2017

Tested by: HPE

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	571	89.3	562	90.6	<b>566</b>	<b>90.0</b>							
502.gcc_r	32	433	105	<b>436</b>	<b>104</b>	440	103							
505.mcf_r	32	346	150	<b>357</b>	<b>145</b>	363	143							
520.omnetpp_r	32	625	67.2	<b>623</b>	<b>67.4</b>	621	67.6							
523.xalancbmk_r	32	257	131	259	130	<b>259</b>	<b>131</b>							
525.x264_r	32	233	240	<b>234</b>	<b>239</b>	235	238							
531.deepsjeng_r	32	352	104	<b>355</b>	<b>103</b>	356	103							
541.leela_r	32	540	98.1	<b>549</b>	<b>96.6</b>	551	96.2							
548.exchange2_r	32	363	231	362	232	<b>362</b>	<b>231</b>							
557.xz_r	32	412	83.8	447	77.3	<b>447</b>	<b>77.4</b>							

**SPECrate2017\_int\_base = 118**

**SPECrate2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
irqbalance service stopped using "systemctl stop irqbalance.service"

Used throughput-performance profile for tuned-adm: "tuned-adm profile throughput-performance profile"

Numa Balancing disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (3.90 GHz, Intel Xeon Gold 6137)	SPECrate2017_int_base = 118  SPECrate2017_int_peak = Not Run
CPU2017 License: 3  Test Sponsor: HPE Tested by: HPE	Test Date: Dec-2017  Hardware Availability: Dec-2017 Software Availability: Sep-2017

## General Notes (Continued)

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Memory Patrol Scrubbing set to Disabled  
Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Stale A to S set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on dl380gen10-2 Fri Dec 1 22:41:46 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6137 CPU @ 3.90GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings : 16
  physical 0: cores 0 5 16 18 19 20 21
  physical 1: cores 0 2 3 9 16 19 26 27
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(3.90 GHz, Intel Xeon Gold 6137)

**SPECrate2017\_int\_base = 118**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3

**Test Date:** Dec-2017

Test Sponsor: HPE

**Hardware Availability:** Dec-2017

Tested by: HPE

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Model:	85
Model name:	Intel(R) Xeon(R) Gold 6137 CPU @ 3.90GHz
Stepping:	4
CPU MHz:	3890.871
BogoMIPS:	7781.74
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	1024K
L3 cache:	25344K
NUMA node0 CPU(s):	0-3,16-19
NUMA node1 CPU(s):	4-7,20-23
NUMA node2 CPU(s):	8-11,24-27
NUMA node3 CPU(s):	12-15,28-31
Flags:	fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occrap_llc

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19
node 0 size: 47892 MB
node 0 free: 47248 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 48382 MB
node 1 free: 48152 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 48382 MB
node 2 free: 48161 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 48266 MB
node 3 free: 48077 MB
node distances:
node 0 1 2 3
 0: 10 21 31 31
 1: 21 10 31 31
 2: 31 31 10 21
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (3.90 GHz, Intel Xeon Gold 6137)	SPECrate2017_int_base = 118  SPECrate2017_int_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Dec-2017 Hardware Availability: Dec-2017 Software Availability: Sep-2017

## Platform Notes (Continued)

3: 31 31 21 10

```
From /proc/meminfo
  MemTotal:      197554680 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
  SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
  os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
  Linux dl380gen10-2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 1 22:41

SPEC is set to: /home/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda4        xfs   517G  103G  414G  20%  /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U30 09/29/2017
  Memory:
    24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666

(End of data from sysinfo program)
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (3.90 GHz, Intel Xeon Gold 6137)	SPECrate2017_int_base = 118  SPECrate2017_int_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Dec-2017 Hardware Availability: Dec-2017 Software Availability: Sep-2017

## Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)
```

```
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)
```

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====  
FC 548.exchange2_r(base)
```

```
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(3.90 GHz, Intel Xeon Gold 6137)

SPECrate2017\_int\_base = 118

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

## Base Portability Flags (Continued)

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(3.90 GHz, Intel Xeon Gold 6137)

SPECrate2017\_int\_base = 118

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-01 22:41:46-0500.

Report generated on 2018-10-31 16:42:27 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-15.