# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

## Huawei 2288H V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_base = 6.97

SPECspeed2017_int_peak = 7.20

**CPU2017 License:** 3175
**Test Sponsor:** Huawei
**Tested by:** Huawei

**Test Date:** Dec-2017
**Hardware Availability:** Jul-2017
**Software Availability:** Sep-2017

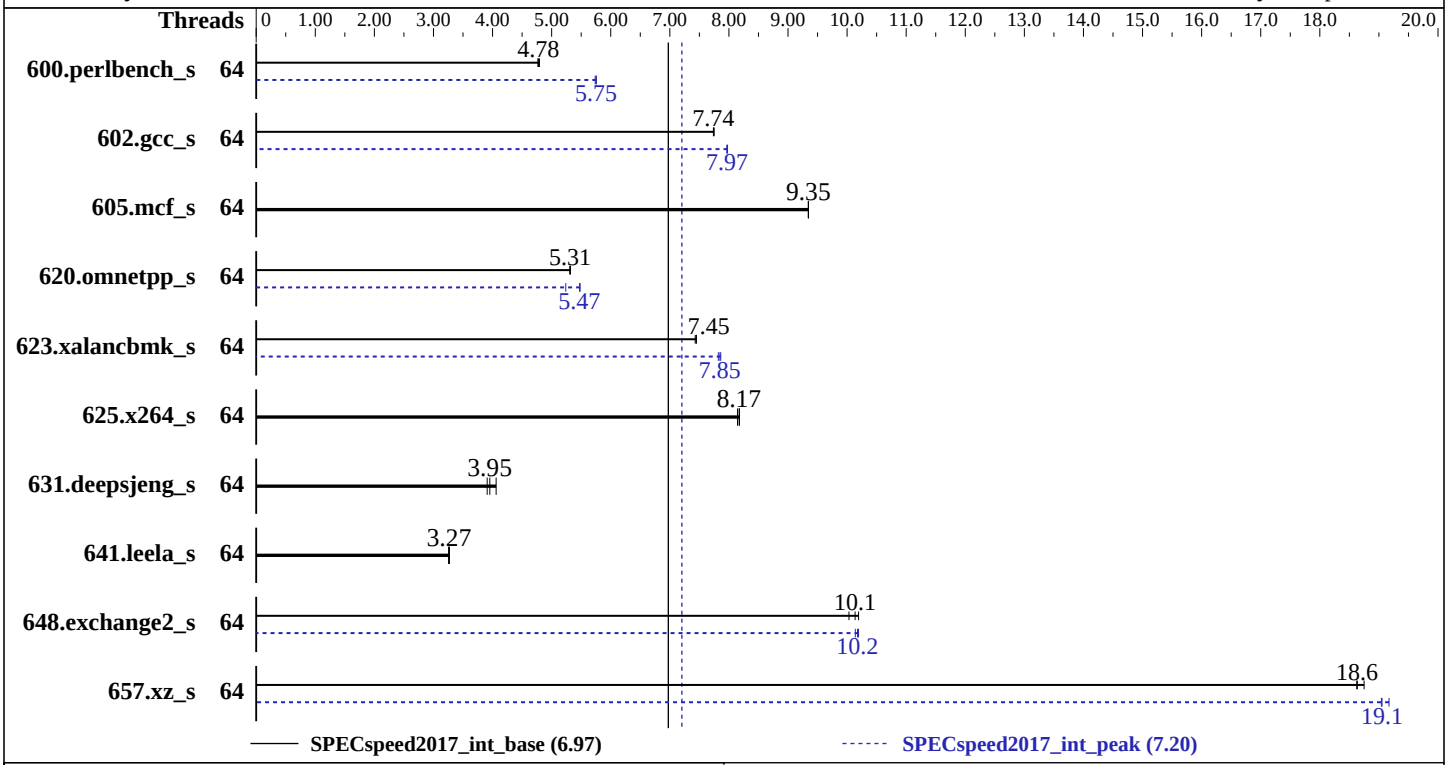


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6130 |
| Max MHz.: | 3700 |
| Nominal: | 2100 |
| Enabled: | 32 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 22 MB I+D on chip per chip |
| Other: | None |
| Memory: | 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R) |
| Storage: | 1 x 1200 GB SAS, 10000 RPM |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux Server release 7.3 (Maipo)<br>3.10.0-514.el7.x86_64 |
| Compiler: | C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Version 0.31 Released Sep-2017 |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library V5.0.1;<br>jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;<br>jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;<br>jemalloc: sources avilable from jemalloc.net or releases |

# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

## Huawei 2288H V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_base = 6.97

SPECspeed2017_int_peak = 7.20

**CPU2017 License:** 3175
**Test Sponsor:** Huawei
**Tested by:** Huawei

**Test Date:** Dec-2017
**Hardware Availability:** Jul-2017
**Software Availability:** Sep-2017

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 64 | **372** | **4.78** | 370 | 4.79 | 372 | 4.77 | 64 | **309** | **5.75** | 308 | 5.76 | 309 | 5.74 |
| 602.gcc_s | 64 | 515 | 7.74 | **515** | **7.74** | 514 | 7.75 | 64 | **500** | **7.97** | 499 | 7.98 | 500 | 7.97 |
| 605.mcf_s | 64 | 505 | 9.35 | 505 | 9.34 | **505** | **9.35** | 64 | 505 | 9.35 | 505 | 9.34 | **505** | **9.35** |
| 620.omnetpp_s | 64 | **307** | **5.31** | 307 | 5.31 | 307 | 5.32 | 64 | **298** | **5.47** | 311 | 5.24 | 298 | 5.48 |
| 623.xalancbmk_s | 64 | 190 | 7.45 | 191 | 7.43 | **190** | **7.45** | 64 | **181** | **7.85** | 181 | 7.82 | 180 | 7.86 |
| 625.x264_s | 64 | **216** | **8.17** | 217 | 8.15 | 216 | 8.18 | 64 | **216** | **8.17** | 217 | 8.15 | 216 | 8.18 |
| 631.deepsjeng_s | 64 | 367 | 3.91 | 353 | 4.06 | **362** | **3.95** | 64 | 367 | 3.91 | 353 | 4.06 | **362** | **3.95** |
| 641.leela_s | 64 | **522** | **3.27** | 522 | 3.27 | 524 | 3.26 | 64 | **522** | **3.27** | 522 | 3.27 | 524 | 3.26 |
| 648.exchange2_s | 64 | **290** | **10.1** | 288 | 10.2 | 293 | 10.0 | 64 | **289** | **10.2** | 290 | 10.1 | 288 | 10.2 |
| 657.xz_s | 64 | 330 | 18.7 | **332** | **18.6** | 332 | 18.6 | 64 | **324** | **19.1** | 325 | 19.0 | 322 | 19.2 |

**SPECspeed2017_int_base = 6.97**

**SPECspeed2017_int_peak = 7.20**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
```

## Platform Notes

```
 BIOS configuration:
 Power Efficiency Mode Set to Custom
 Hyper-Threading Set to Disable
 Sysinfo program /spec2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on localhost.localdomain Fri Dec 15 02:15:24 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
        2  "physical id"s (chips)
        32 "processors"
     cores, siblings (Caution: counting these is hw and system dependent. The following
     excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
        cpu cores : 16
        siblings  : 16
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

  From lscpu:
       Architecture:          x86_64
       CPU op-mode(s):        32-bit, 64-bit
       Byte Order:            Little Endian
       CPU(s):                32
       On-line CPU(s) list:   0-31
       Thread(s) per core:    1
       Core(s) per socket:    16
       Socket(s):             2
       NUMA node(s):          2
       Vendor ID:             GenuineIntel
       CPU family:            6
       Model:                 85
       Model name:            Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
       Stepping:              4
       CPU MHz:               2101.000
       BogoMIPS:              4205.14
       Virtualization:        VT-x
       L1d cache:             32K
       L1i cache:             32K
       L2 cache:              1024K
       L3 cache:              22528K
       NUMA node0 CPU(s):     0-15
       NUMA node1 CPU(s):     16-31

  /proc/cpuinfo cache data
     cache size : 22528 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    node 0 size: 194709 MB
    node 0 free: 189372 MB
```


**(Continued on next page)**

## Platform Notes (Continued)

```
  node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
  node 1 size: 196608 MB
  node 1 free: 191643 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

From /proc/meminfo
   MemTotal:       394144876 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.3 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.3"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 14 19:50

SPEC is set to: /spec2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  689G   26G  629G   4% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS INSYDE Corp. 0.31 09/29/2017
  Memory:
   24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
      peak) 657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
     641.leela_s(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

## Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

**(Continued on next page)**

## Base Other Flags (Continued)

Fortran benchmarks:
-m64

## Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

## Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp

**(Continued on next page)**

## Peak Optimization Flags (Continued)

602.gcc_s (continued):
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: basepeak = yes

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks (except as noted below):
-m64

623.xalancbmk_s: -m32

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml


SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-15 02:15:23-0500.
Report generated on 2018-10-31 17:01:01 by CPU2017 PS formatter v6067.
Originally published on 2018-01-10.