SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.20 GHz, Intel Xeon Silver 4114)

SPECrate2017_fp_base = 102

SPECrate2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

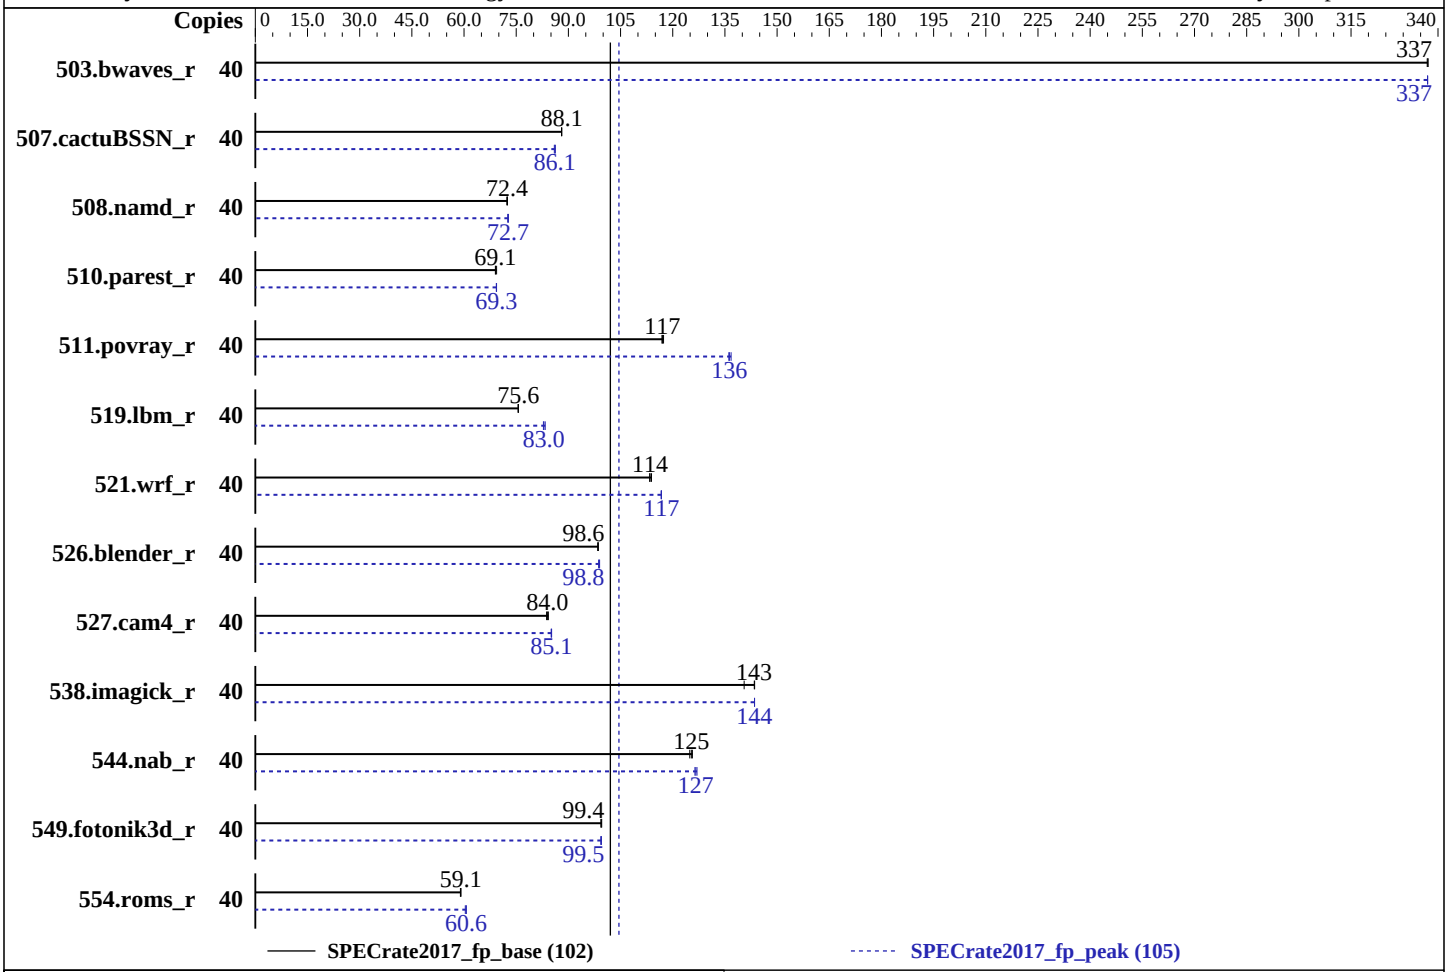

Hardware

CPU Name:	Intel Xeon Silver 4114
Max MHz.:	3000
Nominal:	2200
Enabled:	20 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	13.75 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage:	1 x 800 GB SAS SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) Kernel 4.4.73-5-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version TEE119J 1.20 released Sep-2017
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.20 GHz, Intel Xeon Silver 4114)

SPECrate2017_fp_base = 102

SPECrate2017_fp_peak = 105

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	40	1191	337	1190	337	**1190**	**337**	40	1190	337	1190	337	**1190**	**337**
507.cactuBSSN_r	40	575	88.0	**575**	**88.1**	575	88.1	40	**588**	**86.1**	587	86.2	589	86.0
508.namd_r	40	525	72.3	**525**	**72.4**	524	72.5	40	522	72.7	**523**	**72.7**	524	72.6
510.parest_r	40	1509	69.4	1516	69.0	**1515**	**69.1**	40	1509	69.3	1510	69.3	**1509**	**69.3**
511.povray_r	40	796	117	799	117	**798**	**117**	40	**685**	**136**	683	137	686	136
519.lbm_r	40	**558**	**75.6**	558	75.6	558	75.6	40	506	83.3	509	82.8	**508**	**83.0**
521.wrf_r	40	787	114	**789**	**114**	790	113	40	**768**	**117**	767	117	768	117
526.blender_r	40	618	98.6	619	98.4	**618**	**98.6**	40	**616**	**98.8**	616	99.0	617	98.7
527.cam4_r	40	**833**	**84.0**	830	84.2	836	83.7	40	822	85.1	821	85.2	**822**	**85.1**
538.imagick_r	40	**694**	**143**	708	141	693	144	40	693	144	693	144	**693**	**144**
544.nab_r	40	539	125	536	126	**537**	**125**	40	530	127	533	126	**532**	**127**
549.fotonik3d_r	40	**1568**	**99.4**	1565	99.6	1569	99.4	40	**1567**	**99.5**	1569	99.3	1567	99.5
554.roms_r	40	1075	59.1	**1076**	**59.1**	1078	59.0	40	1048	60.7	**1049**	**60.6**	1053	60.4

SPECrate2017_fp_base = 102

SPECrate2017_fp_peak = 105

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
DCU Streamer Prefetcher set to Disable
MONITORMWAIT set to Enable
XPT Prefetcher set to Enable
Stale AtoS set to Enable
LLC Deadline Alloc set to Disable
 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on SR590-2 Sat Dec 16 06:39:32 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
       2  "physical id"s (chips)
       40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 10
       siblings  : 20
       physical 0: cores 0 1 2 3 4 8 9 10 11 12
       physical 1: cores 0 1 2 3 4 8 9 10 11 12

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                40
      On-line CPU(s) list:   0-39
      Thread(s) per core:    2
      Core(s) per socket:    10
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
      Stepping:              4
      CPU MHz:               2194.845
      BogoMIPS:              4389.69
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
```

(Continued on next page)

Platform Notes (Continued)

```
      L3 cache:              14080K
      NUMA node0 CPU(s):     0-9,20-29
      NUMA node1 CPU(s):     10-19,30-39
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

/proc/cpuinfo cache data
   cache size : 14080 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
  node 0 size: 192984 MB
  node 0 free: 191838 MB
  node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
  node 1 size: 193516 MB
  node 1 free: 192423 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

From /proc/meminfo
   MemTotal:       395777108 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
```

(Continued on next page)

Platform Notes (Continued)

```
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux SR590-2 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Dec 15 19:51

 SPEC is set to: /home/cpu2017.1.0.2.ic18.0
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sdb2      btrfs  744G   96G  647G  13% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[TEE119J-1.20]- 09/06/2017
   Memory:
    12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666, configured at 2400
    4x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs

(Continued on next page)

Peak Optimization Flags (Continued)

554.roms_r (continued):
-align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-15 17:39:31-0500.
Report generated on 2018-10-31 17:04:03 by CPU2017 PS formatter v6067.
Originally published on 2018-01-10.