



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

**SPECrate2017\_int\_base = 33.8**

**SPECrate2017\_int\_peak = 34.6**

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

**Test Date:** Jan-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

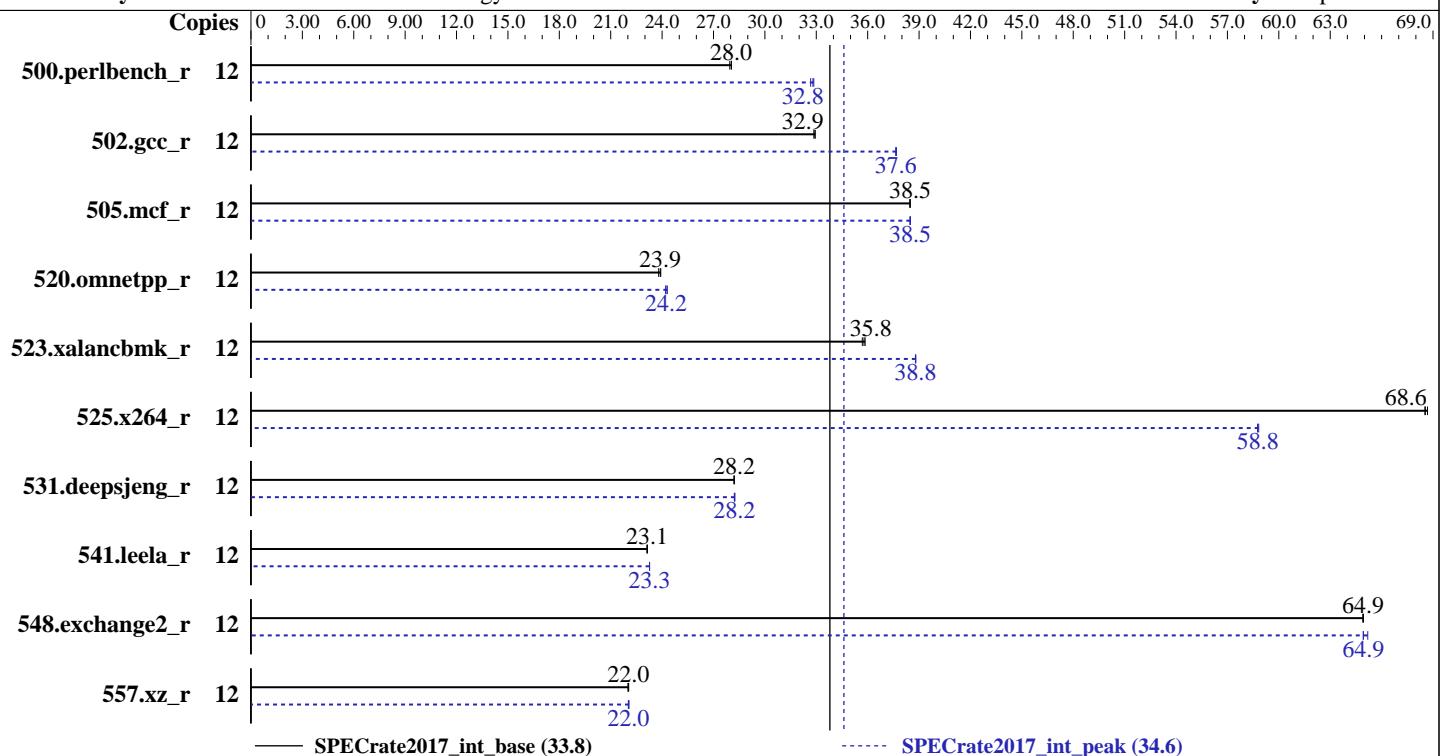

Hardware		Software	
CPU Name:	Intel Xeon Bronze 3104	OS:	SUSE Linux Enterprise Server 12 SP2 (x86_64)
Max MHz.:	1700		Kernel 4.4.21-69-default
Nominal:	1700	Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Enabled:	12 cores, 2 chips		Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Lenovo BIOS Version IVE113K 1.10 released Sep-2017
L2:	1 MB I+D on chip per core	File System:	btrfs
L3:	8.25 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)	Peak Pointers:	32/64-bit
Storage:	1 x 800 GB SAS SSD	Other:	jemalloc: jemalloc memory allocator library V5.0.1
Other:	None		



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

**SPECrate2017\_int\_base = 33.8**

**SPECrate2017\_int\_peak = 34.6**

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	<b>681</b>	<b>28.0</b>	681	28.0	684	27.9	12	585	32.7	<b>582</b>	<b>32.8</b>	581	32.9
502.gcc_r	12	<b>516</b>	<b>32.9</b>	516	32.9	517	32.9	12	451	37.7	451	37.6	<b>451</b>	<b>37.6</b>
505.mcf_r	12	504	38.5	504	38.5	<b>504</b>	<b>38.5</b>	12	504	38.5	<b>504</b>	<b>38.5</b>	504	38.5
520.omnetpp_r	12	658	23.9	<b>659</b>	<b>23.9</b>	662	23.8	12	<b>650</b>	<b>24.2</b>	650	24.2	648	24.3
523.xalancbmk_r	12	<b>354</b>	<b>35.8</b>	353	35.9	355	35.7	12	<b>327</b>	<b>38.8</b>	327	38.8	327	38.8
525.x264_r	12	306	68.7	<b>307</b>	<b>68.6</b>	307	68.5	12	358	58.8	<b>358</b>	<b>58.8</b>	357	58.8
531.deepsjeng_r	12	<b>488</b>	<b>28.2</b>	488	28.2	488	28.2	12	487	28.3	487	28.2	<b>487</b>	<b>28.2</b>
541.leela_r	12	<b>859</b>	<b>23.1</b>	859	23.1	860	23.1	12	<b>854</b>	<b>23.3</b>	854	23.3	<b>854</b>	<b>23.3</b>
548.exchange2_r	12	484	64.9	<b>484</b>	<b>64.9</b>	484	64.9	12	482	65.2	<b>484</b>	<b>64.9</b>	484	64.9
557.xz_r	12	589	22.0	<b>588</b>	<b>22.0</b>	588	22.1	12	<b>588</b>	<b>22.0</b>	587	22.1	<b>588</b>	22.0

**SPECrate2017\_int\_base = 33.8**

**SPECrate2017\_int\_peak = 34.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>. This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITOR/MWAIT set to Enable

Execute Disable Bit set to Disable

Trusted Execution Technology set to Enable

Stale AtoS set to Enable

LLC Deadline Alloc set to Disable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on Cable-SPECcpu2006-SUSE12SP2 Tue Jan 9 02:29:50 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                12
On-line CPU(s) list:   0-11
Thread(s) per core:    1
Core(s) per socket:    6
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
Stepping:               4
CPU MHz:                1696.019
BogoMIPS:               3392.03
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                8448K
NUMA node0 CPU(s):      0-5
NUMA node1 CPU(s):      6-11
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                        aperf mperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
                        fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb pln pts dtherm intel_pt
                        tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                        erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
                        avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 8448 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 193110 MB
node 0 free: 192332 MB
node 1 cpus: 6 7 8 9 10 11
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 1 size: 193504 MB
node 1 free: 192823 MB
node distances:
node   0   1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      395893876 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux Cable-SPECcpu2006-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 9 02:27

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2      btrfs  744G  191G  553G  26%  /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Lenovo -[IVE113K-1.10]- 09/06/2017
Memory:
 24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/jet5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Base Other Flags (Continued)

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

505.mcf\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 34.6

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Other Flags (Continued)

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-01-08 13:29:48-0500.

Report generated on 2018-10-31 16:55:06 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.