SPEC® CPU2017 Floating Point Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL560 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_fp_base = 235

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

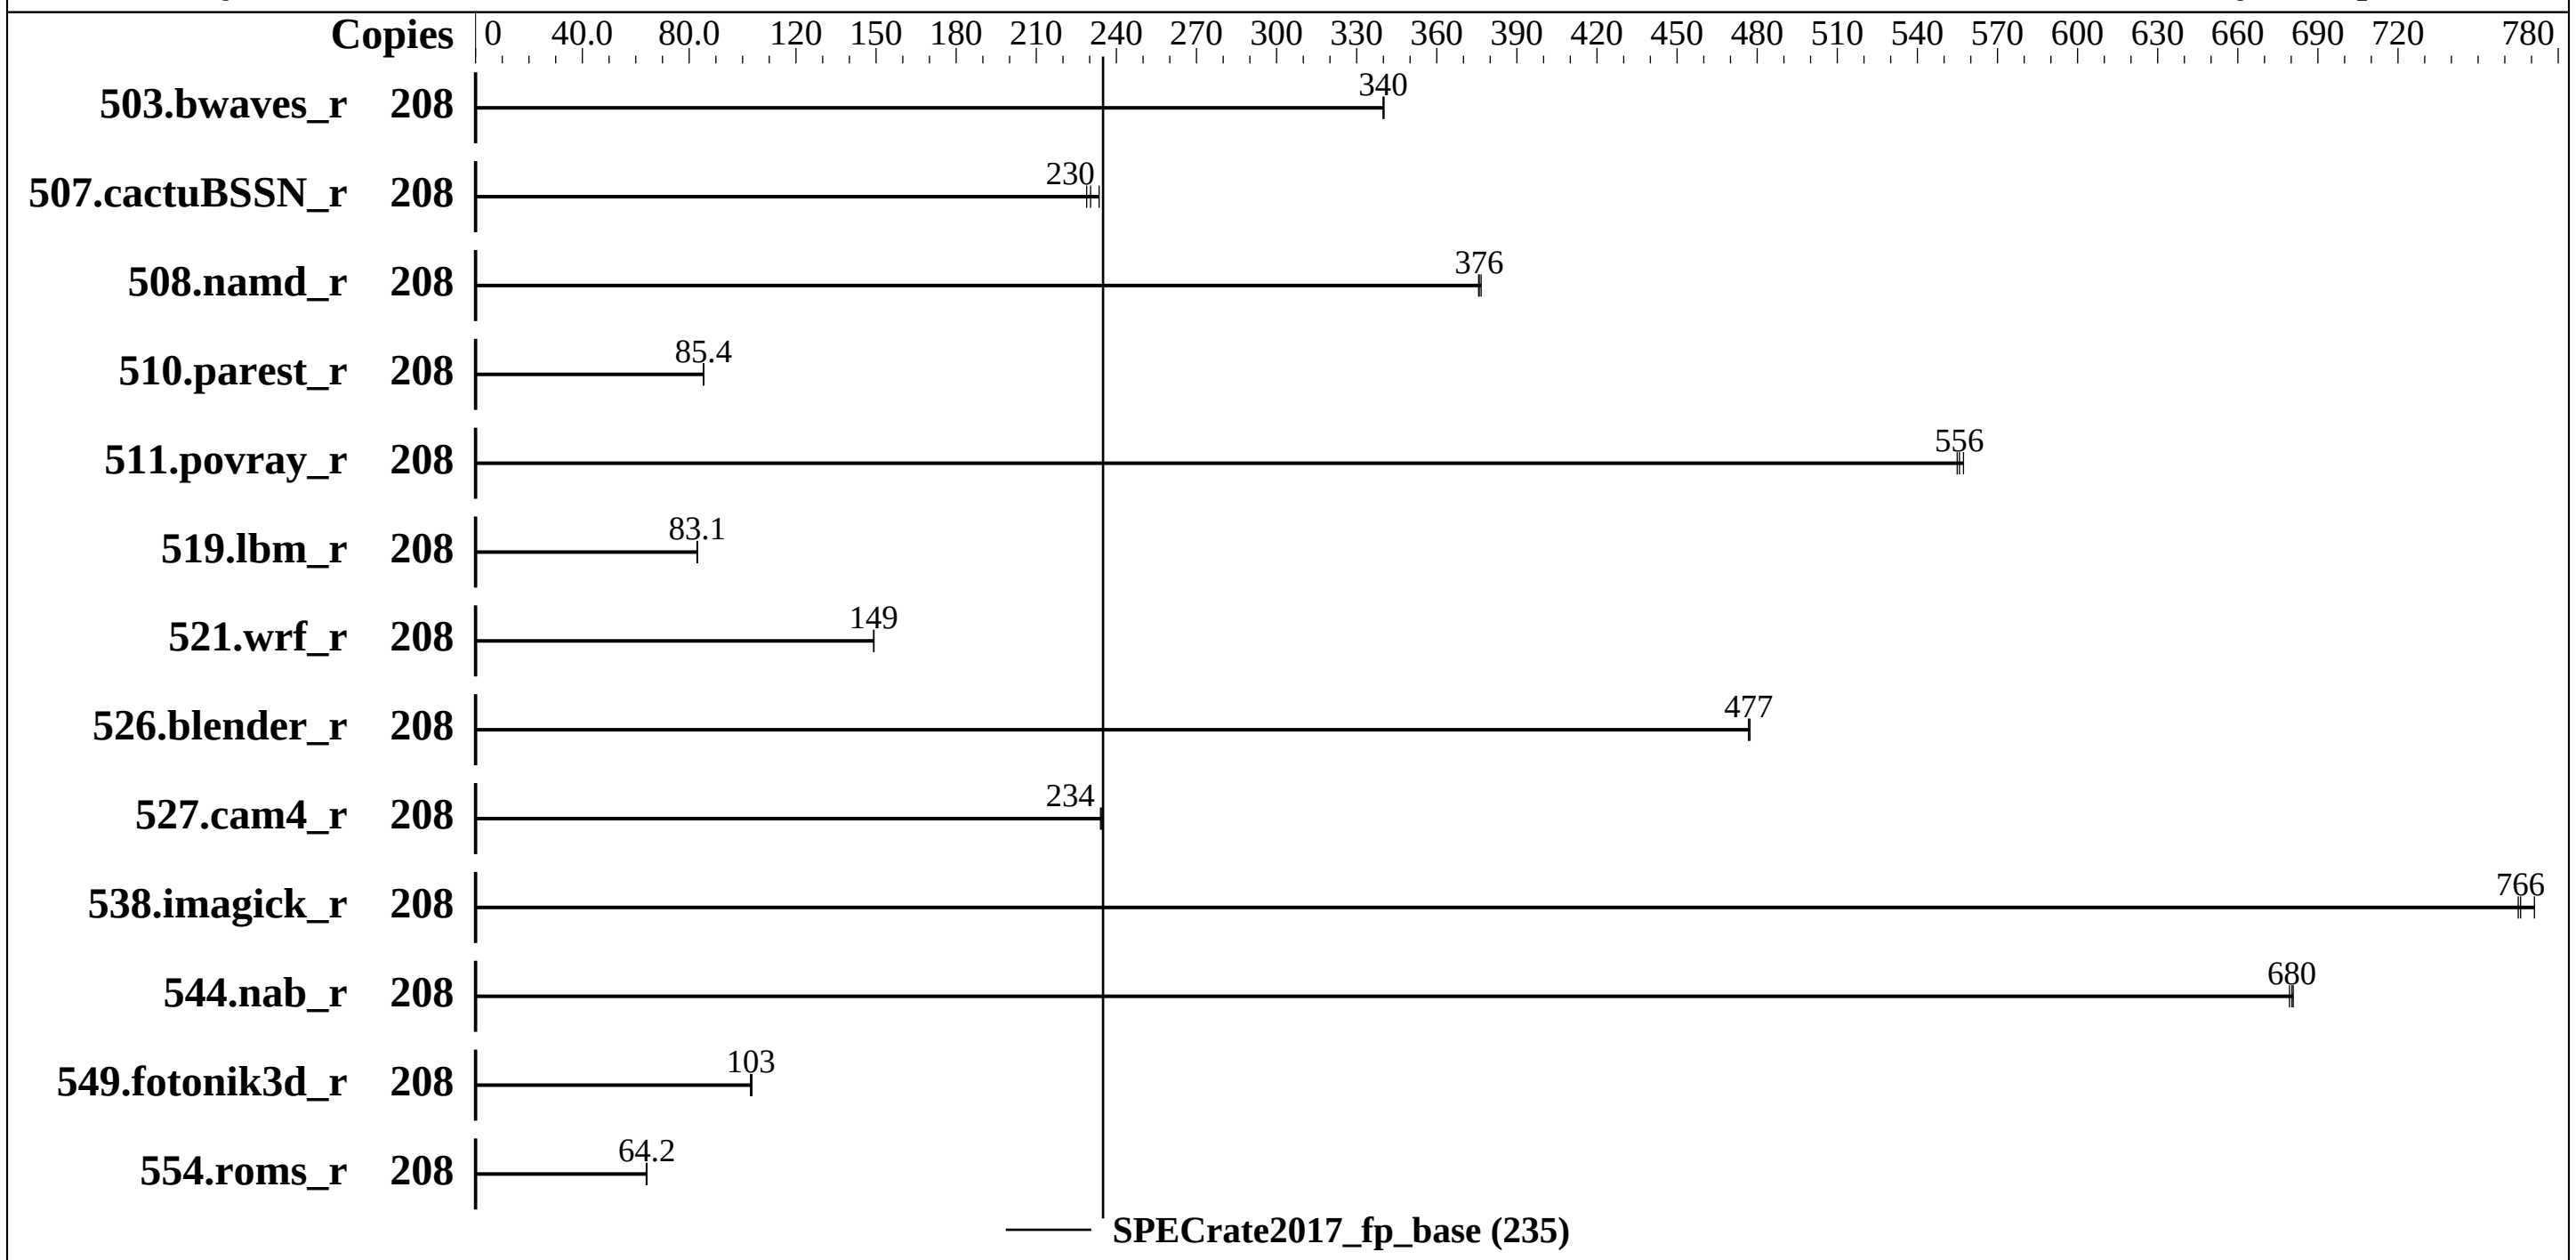

Hardware

CPU Name:	Intel Xeon Platinum 8170
Max MHz.:	3700
Nominal:	2100
Enabled:	104 cores, 4 chips, 2 threads/core
Orderable:	1, 2, 4 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Storage:	2 x 480 GB SATA SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	HPE BIOS Version U34 09/29/2017 released Oct-2017
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator library V5.0.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	6130	340	**6135**	**340**	6136	340							
507.cactuBSSN_r	208	1128	234	**1143**	**230**	1151	229							
508.namd_r	208	525	377	**526**	**376**	526	376							
510.parest_r	208	6374	85.4	6370	85.4	**6374**	**85.4**							
511.povray_r	208	872	557	**874**	**556**	875	555							
519.lbm_r	208	2644	82.9	**2639**	**83.1**	2639	83.1							
521.wrf_r	208	**3124**	**149**	3124	149	3123	149							
526.blender_r	208	**664**	**477**	665	477	664	477							
527.cam4_r	208	1549	235	**1552**	**234**	1554	234							
538.imagick_r	208	676	765	**675**	**766**	671	771							
544.nab_r	208	515	679	**515**	**680**	514	681							
549.fotonik3d_r	208	7832	103	**7857**	**103**	7871	103							
554.roms_r	208	**5150**	**64.2**	5170	63.9	5150	64.2							

SPECrate2017_fp_base = 235

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set wtih "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/SPECCPU2017/lib/ia32:/home/SPECCPU2017/lib/intel64:/home/SPECCPU2017/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/SPECCPU2017/je5.0.1-64"
```

(Continued on next page)

General Notes (Continued)

```
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


This benchmark result is intended to provide perspective on
past performance using the historical hardware and/or
software described on this result page.

The system as described on this result page was formerly
generally available. At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://wwww.spec.org/osg/policy.htm.

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
and software available as of the publication date.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
built with RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Memory Patrol Scrubbing set to Disabled
  LLC Prefetch set to Enabled
  LLC Dead Line Allocation set to Disabled
  Stale A to S set to Enabled
  Workload Profile set to General Throughput Compute
   Minimum Processor Idle Power Core C-State set to C1E State
 Sysinfo program /home/SPECCPU2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-smfo Thu Nov  2 22:55:32 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
      4  "physical id"s (chips)
      208 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 26
      siblings  : 52
      physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
      physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
      physical 2: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
      physical 3: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                208
     On-line CPU(s) list:   0-207
     Thread(s) per core:    2
     Core(s) per socket:    26
     Socket(s):             4
     NUMA node(s):          8
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
     Stepping:              4
     CPU MHz:               2095.079
     BogoMIPS:              4190.15
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              36608K
     NUMA node0 CPU(s):     0-12,104-116
     NUMA node1 CPU(s):     13-25,117-129
     NUMA node2 CPU(s):     26-38,130-142
     NUMA node3 CPU(s):     39-51,143-155
     NUMA node4 CPU(s):     52-64,156-168
     NUMA node5 CPU(s):     65-77,169-181
     NUMA node6 CPU(s):     78-90,182-194
     NUMA node7 CPU(s):     91-103,195-207
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
```

(Continued on next page)

Platform Notes (Continued)

```
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 36608 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 104 105 106 107 108 109 110 111 112 113 114
   115 116
   node 0 size: 96346 MB
   node 0 free: 88885 MB
   node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 117 118 119 120 121 122 123 124 125
   126 127 128 129
   node 1 size: 96764 MB
   node 1 free: 91213 MB
   node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 130 131 132 133 134 135 136 137 138
   139 140 141 142
   node 2 size: 96764 MB
   node 2 free: 91182 MB
   node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 143 144 145 146 147 148 149 150 151
   152 153 154 155
   node 3 size: 32252 MB
   node 3 free: 27084 MB
   node 4 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 156 157 158 159 160 161 162 163 164
   165 166 167 168
   node 4 size: 96764 MB
   node 4 free: 91395 MB
   node 5 cpus: 65 66 67 68 69 70 71 72 73 74 75 76 77 169 170 171 172 173 174 175 176 177
   178 179 180 181
   node 5 size: 96764 MB
   node 5 free: 91396 MB
   node 6 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 182 183 184 185 186 187 188 189 190
   191 192 193 194
   node 6 size: 96764 MB
   node 6 free: 91397 MB
   node 7 cpus: 91 92 93 94 95 96 97 98 99 100 101 102 103 195 196 197 198 199 200 201 202
   203 204 205 206 207
   node 7 size: 96761 MB
   node 7 free: 91266 MB
   node distances:
   node   0   1   2   3   4   5   6   7
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  21  31  31  31  31  31  31
     1:  21  10  31  31  31  31  31  31
     2:  31  31  10  21  31  31  31  31
     3:  31  31  21  10  31  31  31  31
     4:  31  31  31  31  10  21  31  31
     5:  31  31  31  31  21  10  31  31
     6:  31  31  31  31  31  31  10  21
     7:  31  31  31  31  31  31  21  10

 From /proc/meminfo
    MemTotal:       726202768 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-smfo 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Nov 2 15:00

 SPEC is set to: /home/SPECCPU2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   852G  161G  692G  19% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS HPE U34 09/29/2017
    Memory:
     48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-02 23:55:32-0400.
Report generated on 2018-10-31 18:07:52 by CPU2017 PS formatter v6067.
Originally published on 2018-06-13.