SPEC® CPU2017 Floating Point Rate Result

Supermicro

SuperServer 7049P-TR
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017_fp_base = 82.0

SPECrate2017_fp_peak = Not Run

CPU2017 License:	001176	**Test Date:**	Mar-2018
Test Sponsor:	Supermicro	**Hardware Availability:**	Jul-2017
Tested by:	Supermicro	**Software Availability:**	Sep-2017

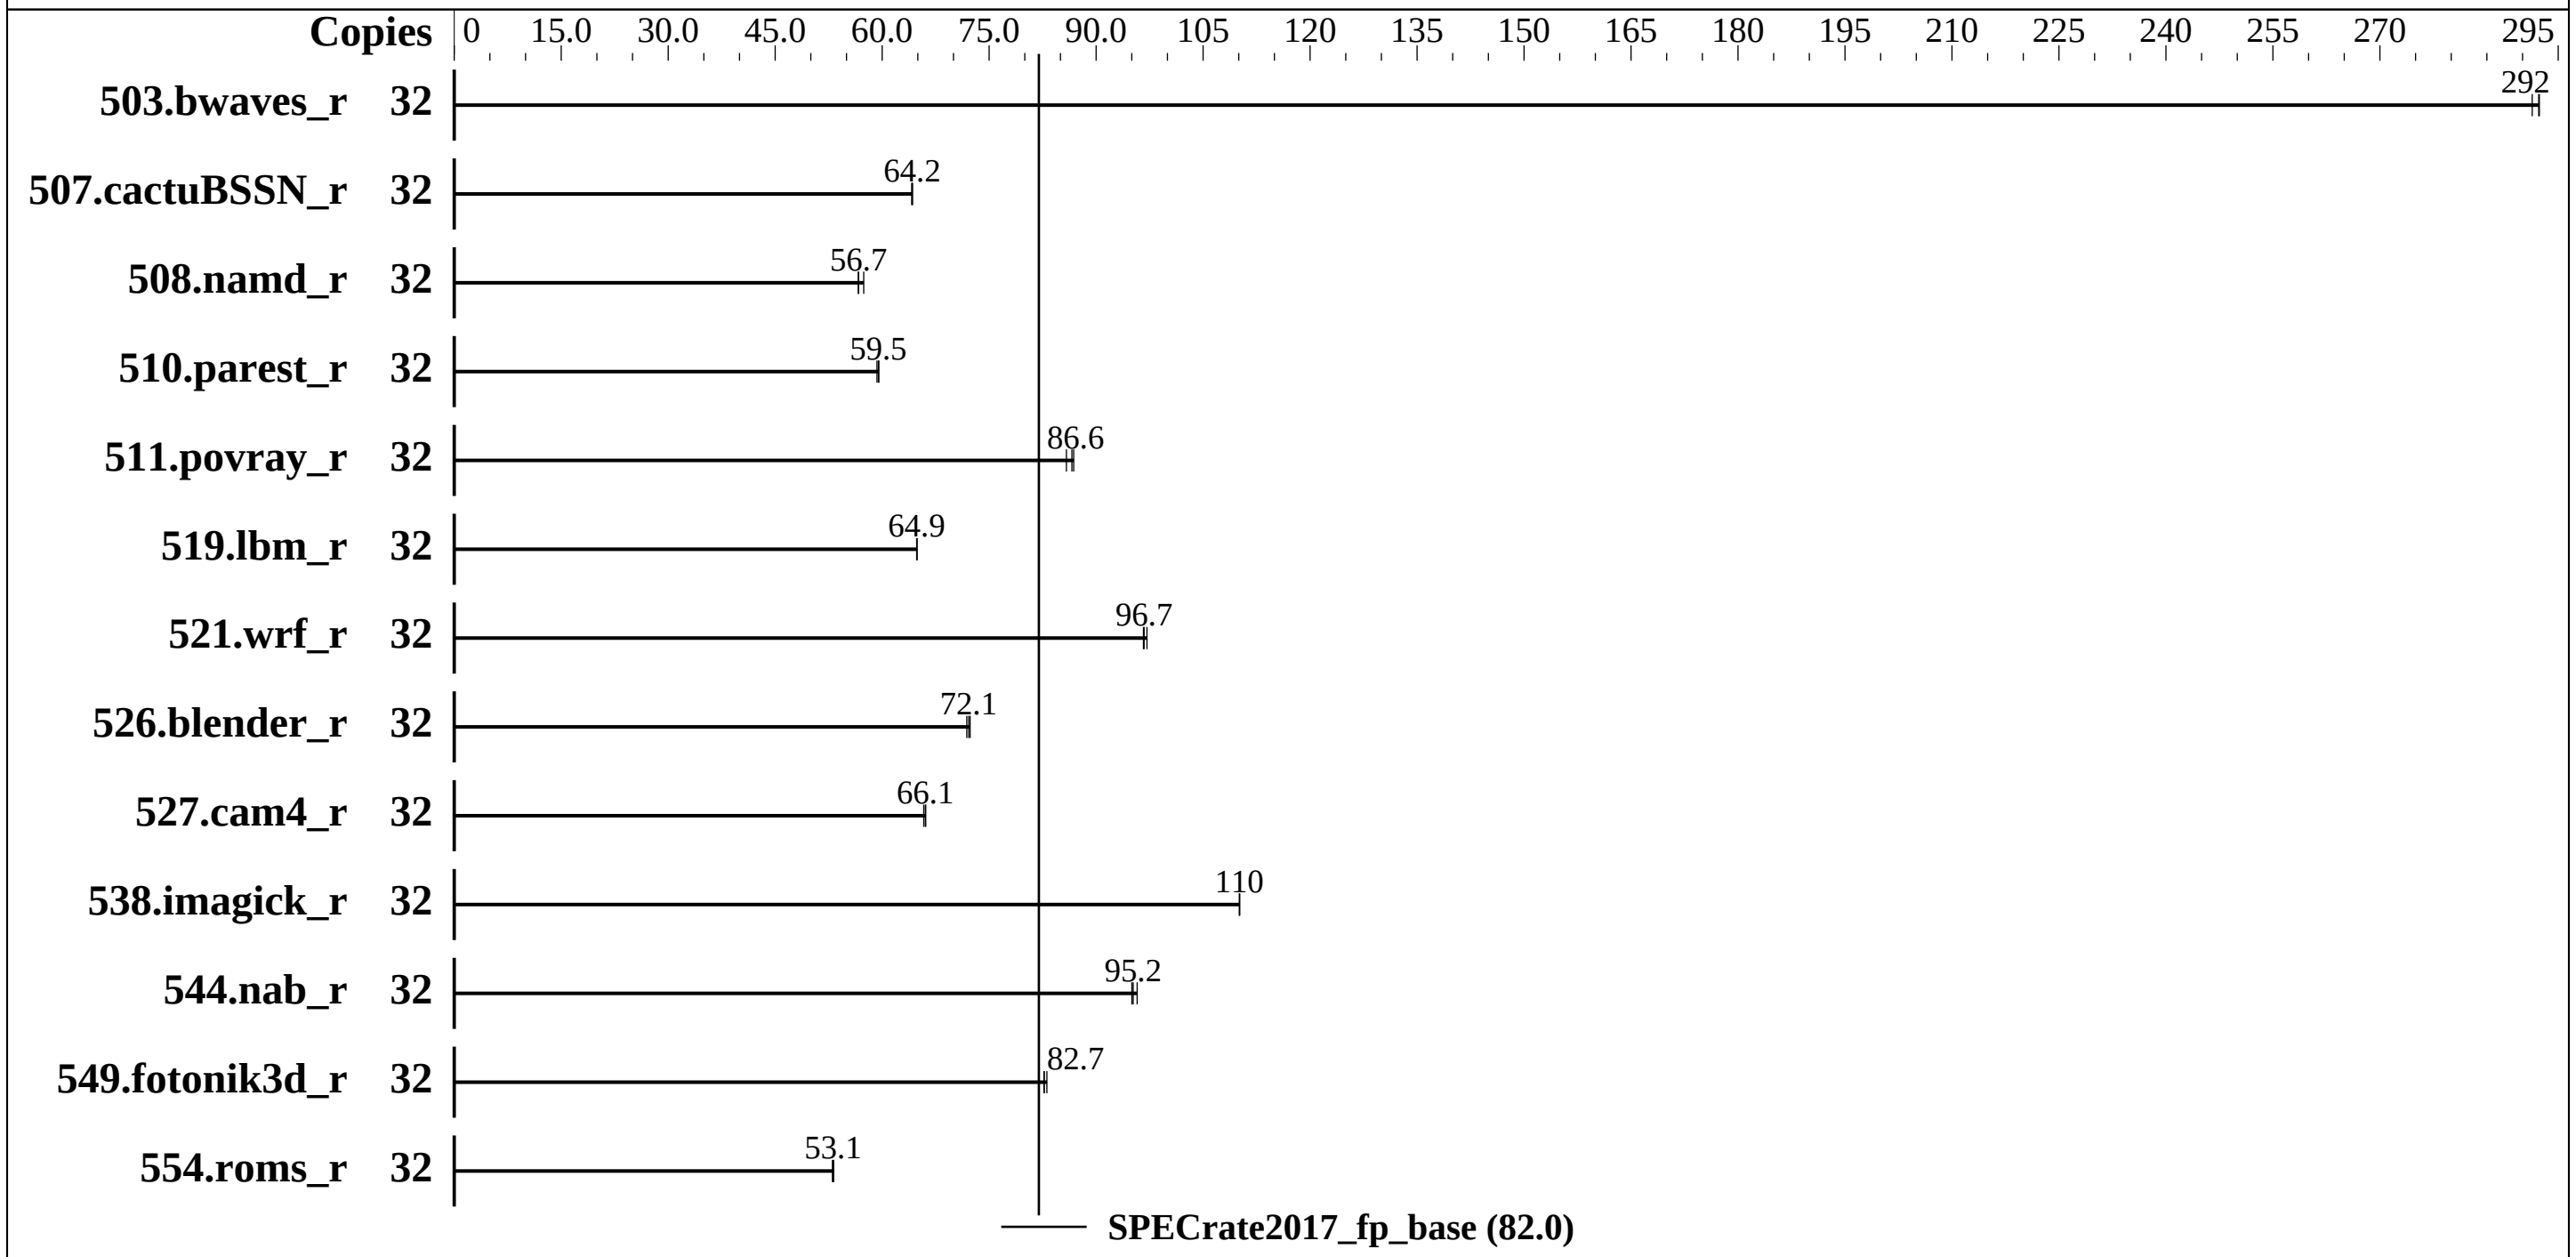

Hardware

CPU Name:	Intel Xeon Silver 4110
Max MHz.:	3000
Nominal:	2100
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	11 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage:	1.9 TB SATA 3 SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 4.4.114-92.64-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Supermicro BIOS version 2.0b released Feb-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

Supermicro

SuperServer 7049P-TR
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017_fp_base = 82.0

SPECrate2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1101	291	1098	292	**1098**	**292**							
507.cactuBSSN_r	32	631	64.2	632	64.1	**631**	**64.2**							
508.namd_r	32	**536**	**56.7**	537	56.7	529	57.4							
510.parest_r	32	1412	59.3	**1408**	**59.5**	1406	59.5							
511.povray_r	32	871	85.8	860	86.9	**863**	**86.6**							
519.lbm_r	32	520	64.8	520	64.9	**520**	**64.9**							
521.wrf_r	32	738	97.1	742	96.6	**741**	**96.7**							
526.blender_r	32	**676**	**72.1**	678	71.9	674	72.3							
527.cam4_r	32	**847**	**66.1**	850	65.8	847	66.1							
538.imagick_r	32	723	110	723	110	**723**	**110**							
544.nab_r	32	**566**	**95.2**	562	95.8	567	95.0							
549.fotonik3d_r	32	1508	82.7	**1507**	**82.7**	1501	83.1							
554.roms_r	32	959	53.0	956	53.2	**957**	**53.1**							

SPECrate2017_fp_base = 82.0

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2k17/lib/ia32:/home/cpu2k17/lib/intel64:/home/cpu2k17/je5.0.1-32:/home/cpu2k17/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
CPU Virtualization = Disable
SNC = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disable
 Sysinfo program /home/cpu2k17/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-itxo Fri Mar  9 00:37:15 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
       2  "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 1 2 3 4 5 6 7
       physical 1: cores 0 1 2 3 4 5 6 7

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                32
      On-line CPU(s) list:   0-31
      Thread(s) per core:    2
      Core(s) per socket:    8
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU family:              6
      Model:                   85
      Model name:              Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
      Stepping:                4
      CPU MHz:                 2101.000
      CPU max MHz:             2101.0000
      CPU min MHz:             800.0000
      BogoMIPS:                4200.01
      Virtualization:          VT-x
      L1d cache:               32K
      L1i cache:               32K
      L2 cache:                1024K
      L3 cache:                11264K
      NUMA node0 CPU(s):       0-7,16-23
      NUMA node1 CPU(s):       8-15,24-31
      Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 11264 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
   node 0 size: 193043 MB
   node 0 free: 186214 MB
   node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
   node 1 size: 193518 MB
   node 1 free: 188518 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10

 From /proc/meminfo
    MemTotal:       395840084 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-itxo 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 8 18:51 last=5

SPEC is set to: /home/cpu2k17
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   1.8T   35G  1.7T   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS American Megatrends Inc. 2.0b 02/28/2018
  Memory:
   12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666, configured at 2400
   4x NO DIMM NO DIMM

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

Supermicro

SuperServer 7049P-TR
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017_fp_base = 82.0

SPECrate2017_fp_peak = Not Run

CPU2017 License:	001176	**Test Date:**	Mar-2018
Test Sponsor:	Supermicro	**Hardware Availability:**	Jul-2017
Tested by:	Supermicro	**Software Availability:**	Sep-2017

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-09 03:37:14-0500.
Report generated on 2018-10-31 17:42:07 by CPU2017 PS formatter v6067.
Originally published on 2018-04-03.