



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081


Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

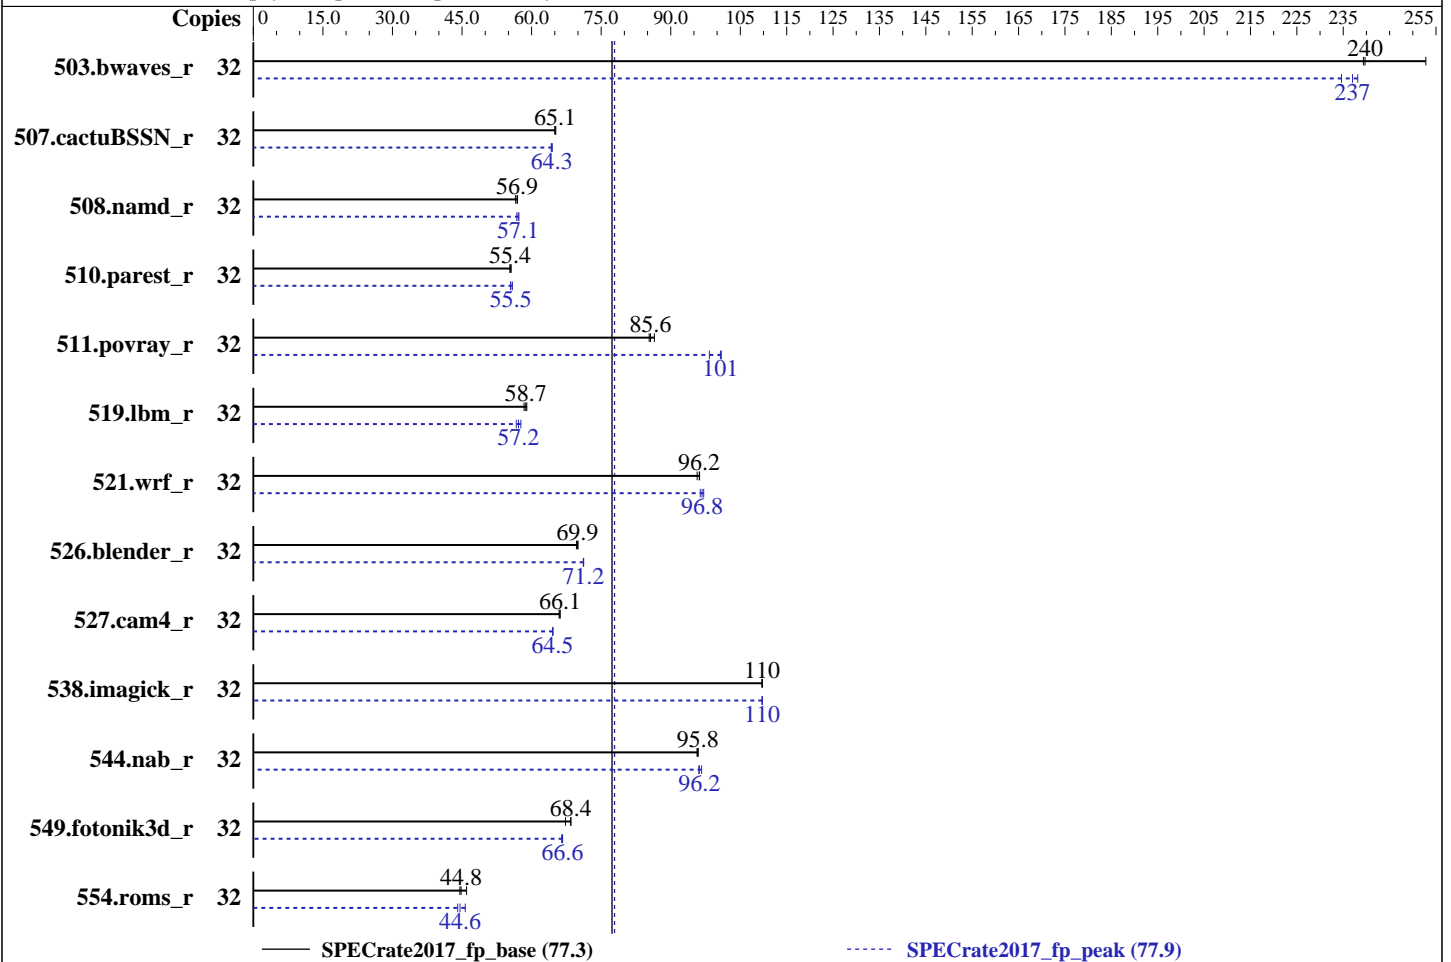

## Hardware

CPU Name: Intel Xeon Silver 4110  
 Max MHz.: 3000  
 Nominal: 2100  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 960 GB SSD SATA III  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 3.10.0-693.21.1.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version BIOS 2.0b released Feb-2018  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1269	253	<b>1339</b>	<b>240</b>	1341	239	32	1348	238	<b>1354</b>	<b>237</b>	1368	235
507.cactuBSSN_r	32	621	65.2	<b>622</b>	<b>65.1</b>	623	65.0	32	628	64.5	<b>630</b>	<b>64.3</b>	631	64.2
508.namd_r	32	<b>535</b>	<b>56.9</b>	538	56.6	534	57.0	32	535	56.8	<b>532</b>	<b>57.1</b>	531	57.3
510.parest_r	32	<b>1511</b>	<b>55.4</b>	1506	55.6	1513	55.3	32	<b>1508</b>	<b>55.5</b>	1499	55.9	1509	55.5
511.povray_r	32	864	86.5	<b>872</b>	<b>85.6</b>	875	85.4	32	741	101	760	98.3	<b>742</b>	<b>101</b>
519.lbm_r	32	572	59.0	<b>574</b>	<b>58.7</b>	578	58.4	32	585	57.7	<b>590</b>	<b>57.2</b>	595	56.7
521.wrf_r	32	745	96.2	749	95.7	<b>745</b>	<b>96.2</b>	32	<b>741</b>	<b>96.8</b>	738	97.1	744	96.4
526.blender_r	32	700	69.7	696	70.0	<b>697</b>	<b>69.9</b>	32	684	71.2	685	71.1	<b>685</b>	<b>71.2</b>
527.cam4_r	32	849	65.9	<b>846</b>	<b>66.1</b>	846	66.1	32	867	64.5	<b>867</b>	<b>64.5</b>	866	64.6
538.imagick_r	32	<b>725</b>	<b>110</b>	726	110	725	110	32	725	110	726	110	<b>725</b>	<b>110</b>
544.nab_r	32	<b>562</b>	<b>95.8</b>	563	95.7	561	95.9	32	557	96.7	<b>560</b>	<b>96.2</b>	561	96.1
549.fotonik3d_r	32	1821	68.5	<b>1822</b>	<b>68.4</b>	1853	67.3	32	<b>1872</b>	<b>66.6</b>	1876	66.5	1870	66.7
554.roms_r	32	<b>1135</b>	<b>44.8</b>	1106	46.0	1142	44.5	32	1113	45.7	<b>1141</b>	<b>44.6</b>	1154	44.1

SPECrate2017\_fp\_base = 77.3

SPECrate2017\_fp\_peak = 77.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2017.1.0/lib/ia32:/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## General Notes (Continued)

Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS Settings:  
 Power Technology = Custom  
 Turbo Mode = Enable  
 Enhanced Halt State (C1E) = Disable  
 CPU C6 report = Disabled  
 Package C State = No limit  
 Software Controlled T-States = Disable  
 Hyper-Threading (All) = Enable  
 Enforce POR = Disable  
 Memory Frequency = Auto  
 Patrol Scrub = Disabled  
 IMC Interleaving = Auto  
 SNC = Disabled

Sysinfo program /cpu2017.1.0/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on SUT Sat Apr 14 00:33:07 2018

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz  
 2 "physical id"s (chips)  
 32 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following  
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 8  
 siblings : 16  
 physical 0: cores 0 1 2 3 4 5 6 7  
 physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):              32
On-line CPU(s) list: 0-31
Thread(s) per core:  2
Core(s) per socket:  8
Socket(s):           2
NUMA node(s):        2
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
Stepping:             4
CPU MHz:              2101.000
CPU max MHz:          2101.0000
CPU min MHz:          800.0000
BogoMIPS:             4200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             11264K
NUMA node0 CPU(s):   0-7,16-23
NUMA node1 CPU(s):   8-15,24-31
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 129714 MB
node 0 free: 126388 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 131072 MB
node 1 free: 127919 MB
node distances:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

```
node    0    1
0:     10   21
1:     21   10
```

From /proc/meminfo

```
MemTotal:      262578036 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

run-level 3 Apr 13 13:23

SPEC is set to: /cpu2017.1.0

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdal        ext4      825G      84G   700G  11% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0b 02/28/2018

Memory:

16x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 519.lbm\_r(peak) 544.nab\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

FC 507.cactuBSSN\_r(base)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

FC 507.cactuBSSN\_r(peak)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

FC 554.roms\_r(peak)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

CC 521.wrf\_r(base) 527.cam4\_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Apr-2018

**Hardware Availability:** Sep-2017

**Software Availability:** Mar-2018

## Base Optimization Flags

### C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

### Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

### Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

## Base Other Flags

### C benchmarks:

```
-m64 -std=c11
```

### C++ benchmarks:

```
-m64
```

### Fortran benchmarks:

```
-m64
```

### Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

### Benchmarks using both C and C++:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 77.3

eterio 223 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 77.9

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Apr-2018

**Hardware Availability:** Sep-2017

**Software Availability:** Mar-2018

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-13 18:33:07-0400.

Report generated on 2018-10-31 17:47:27 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-01.