



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081


Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

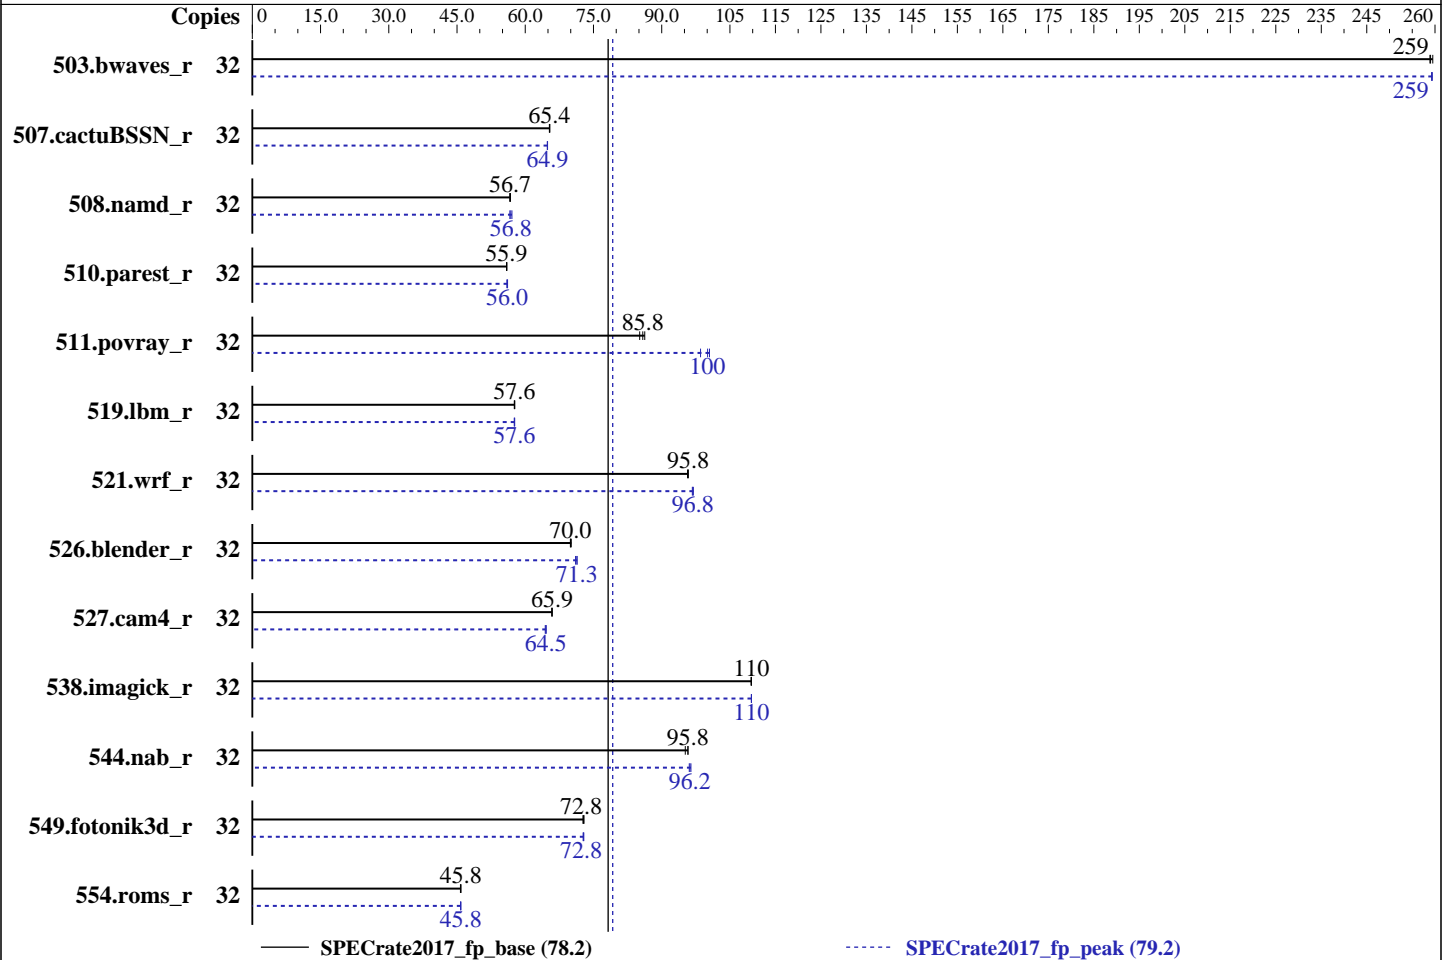

## Hardware

CPU Name: Intel Xeon Silver 4110  
 Max MHz.: 3000  
 Nominal: 2100  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 960 GB SSD SATA III  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 3.10.0-693.21.1.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version BIOS 2.0b released Mar-2018  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_base = 78.2  
SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Apr-2018

Hardware Availability: Sep-2017

Software Availability: Mar-2018

## Results Table

| Benchmark       | Base   |             |             |             |             |             |             | Peak   |             |             |             |             |            |             |
|-----------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|------------|-------------|
|                 | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       |
| 503.bwaves_r    | 32     | <b>1239</b> | <b>259</b>  | 1240        | 259         | 1237        | 260         | 32     | <b>1238</b> | <b>259</b>  | 1237        | 259         | 1238       | 259         |
| 507.cactuBSSN_r | 32     | <b>620</b>  | <b>65.4</b> | 620         | 65.3        | 620         | 65.4        | 32     | 625         | 64.9        | <b>624</b>  | <b>64.9</b> | 624        | 64.9        |
| 508.namd_r      | 32     | 536         | 56.8        | 537         | 56.6        | <b>536</b>  | <b>56.7</b> | 32     | 537         | 56.6        | <b>535</b>  | <b>56.8</b> | 533        | 57.1        |
| 510.parest_r    | 32     | 1496        | 56.0        | 1498        | 55.9        | <b>1498</b> | <b>55.9</b> | 32     | 1492        | 56.1        | <b>1494</b> | <b>56.0</b> | 1496       | 56.0        |
| 511.povray_r    | 32     | 866         | 86.3        | <b>870</b>  | <b>85.8</b> | 877         | 85.2        | 32     | <b>747</b>  | <b>100</b>  | 743         | 101         | 758        | 98.5        |
| 519.lbm_r       | 32     | 585         | 57.7        | 586         | 57.6        | <b>585</b>  | <b>57.6</b> | 32     | 586         | 57.6        | 585         | 57.7        | <b>585</b> | <b>57.6</b> |
| 521.wrf_r       | 32     | 748         | 95.8        | <b>748</b>  | <b>95.8</b> | 749         | 95.7        | 32     | <b>740</b>  | <b>96.8</b> | 739         | 97.0        | 741        | 96.7        |
| 526.blender_r   | 32     | <b>697</b>  | <b>70.0</b> | 697         | 69.9        | 695         | 70.1        | 32     | <b>683</b>  | <b>71.3</b> | 683         | 71.4        | 686        | 71.1        |
| 527.cam4_r      | 32     | 849         | 65.9        | <b>849</b>  | <b>65.9</b> | 850         | 65.8        | 32     | <b>868</b>  | <b>64.5</b> | 869         | 64.4        | 866        | 64.6        |
| 538.imagick_r   | 32     | 725         | 110         | 726         | 110         | <b>725</b>  | <b>110</b>  | 32     | 725         | 110         | 725         | 110         | <b>725</b> | <b>110</b>  |
| 544.nab_r       | 32     | <b>562</b>  | <b>95.8</b> | 562         | 95.8        | 566         | 95.2        | 32     | <b>560</b>  | <b>96.2</b> | 559         | 96.4        | 561        | 96.1        |
| 549.fotonik3d_r | 32     | 1716        | 72.7        | <b>1713</b> | <b>72.8</b> | 1710        | 72.9        | 32     | 1714        | 72.7        | <b>1713</b> | <b>72.8</b> | 1711       | 72.9        |
| 554.roms_r      | 32     | 1111        | 45.8        | 1109        | 45.9        | <b>1110</b> | <b>45.8</b> | 32     | <b>1110</b> | <b>45.8</b> | 1109        | 45.8        | 1111       | 45.8        |

SPECrate2017\_fp\_base = 78.2

SPECrate2017\_fp\_peak = 79.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2017.1.0/lib/ia32:/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## General Notes (Continued)

Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS Settings:  
Power Technology = Custom  
Turbo Mode = Enable  
Enhanced Halt State (C1E) = Disable  
CPU C6 report = Disabled  
Package C State = No limit  
Software Controlled T-States = Disable  
Hyper-Threading (All) = Enable  
Enforce POR = Disable  
Memory Frequency = Auto  
Patrol Scrub = Disabled  
IMC Interleaving = Auto  
SNC = Disabled

Sysinfo program /cpu2017.1.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on SUT Tue Apr 10 02:22:50 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    32
On-line CPU(s) list:      0-31
Thread(s) per core:       2
Core(s) per socket:       8
Socket(s):                 2
NUMA node(s):             2
Vendor ID:                GenuineIntel
CPU family:               6
Model:                    85
Model name:               Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
Stepping:                 4
CPU MHz:                  2101.000
CPU max MHz:              2101.0000
CPU min MHz:              800.0000
BogoMIPS:                 4200.00
Virtualization:          VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                11264K
NUMA node0 CPU(s):       0-7,16-23
NUMA node1 CPU(s):       8-15,24-31
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 65196 MB
node 0 free: 63057 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 65536 MB
node 1 free: 63801 MB
node distances:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Platform Notes (Continued)

```
node    0    1
0:     10   21
1:     21   10
```

From /proc/meminfo

```
MemTotal:      131460428 kB
HugePages_Total:      0
Hugepagesize:      2048 kB
```

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

run-level 3 Apr 9 14:56

SPEC is set to: /cpu2017.1.0

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      825G   85G  699G  11% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0b 03/06/2018

Memory:

8x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 519.lbm\_r(peak) 544.nab\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

FC 507.cactuBSSN\_r(base)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====  
FC 507.cactuBSSN\_r(peak)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====  
FC 554.roms\_r(peak)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Apr-2018

**Hardware Availability:** Sep-2017

**Software Availability:** Mar-2018

## Base Optimization Flags

### C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

### Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

### Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

## Base Other Flags

### C benchmarks:

```
-m64 -std=c11
```

### C++ benchmarks:

```
-m64
```

### Fortran benchmarks:

```
-m64
```

### Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

### Benchmarks using both C and C++:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017\_fp\_base = 78.2

eterio 210 RE1 (Intel Xeon Silver 4110, 2.10 GHz)

SPECrate2017\_fp\_peak = 79.2

CPU2017 License: 9081

Test Date: Apr-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Mar-2018

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-09 20:22:50-0400.

Report generated on 2018-10-31 17:44:13 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-01.