SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECrate2017_fp_base = 352

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: May-2018
Software Availability: Mar-2018

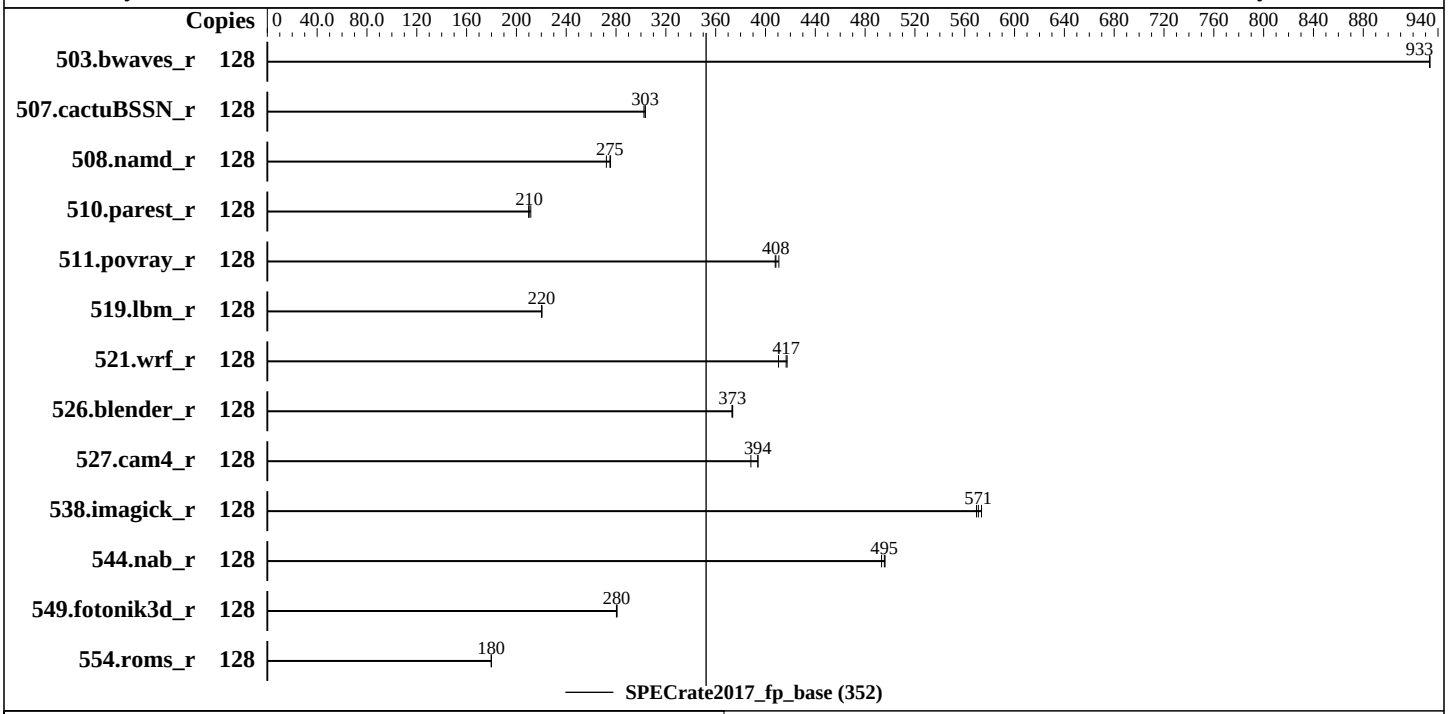

Hardware

CPU Name:	Intel Xeon Gold 6142
Max MHz.:	3700
Nominal:	2600
Enabled:	64 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 900 GB SAS HDD, 10K RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 0.80 released Feb-2018
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc: jemalloc memory allocator library V5.0.1

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECrate2017_fp_base = 352

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: May-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1375	933	1375	933	**1375**	**933**							
507.cactuBSSN_r	128	**534**	**303**	536	302	534	304							
508.namd_r	128	447	272	441	276	**442**	**275**							
510.parest_r	128	1583	212	1596	210	**1592**	**210**							
511.povray_r	128	**732**	**408**	733	408	728	411							
519.lbm_r	128	**612**	**220**	613	220	612	220							
521.wrf_r	128	699	410	687	417	**688**	**417**							
526.blender_r	128	523	373	**522**	**373**	522	374							
527.cam4_r	128	568	394	577	388	**568**	**394**							
538.imagick_r	128	**558**	**571**	559	569	555	573							
544.nab_r	128	437	493	**435**	**495**	434	496							
549.fotonik3d_r	128	1779	280	1776	281	**1778**	**280**							
554.roms_r	128	**1131**	**180**	1131	180	1130	180							

SPECrate2017_fp_base = 352

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

(Continued on next page)

General Notes (Continued)

```
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources avilable from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases;
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 Sub NUMA Cluster (SNC) set to enabled
 IMC (Integrated memory controller) Interleaving set to 1 way interleave
 Xtended Prediction Table (XPT) Prefetch set to Enable
 Memory Patrol Scrub set to Disable
 Last Level Cache (LLC) Prefetch set to Disable
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-52qc Fri May  4 23:40:54 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
       4  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
      Byte Order:            Little Endian
      CPU(s):                128
      On-line CPU(s) list:   0-127
      Thread(s) per core:    2
      Core(s) per socket:    16
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
      Stepping:              4
      CPU MHz:               2601.000
      CPU max MHz:           2601.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5199.91
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              22528K
      NUMA node0 CPU(s):     0-3,8-11,64-67,72-75
      NUMA node1 CPU(s):     4-7,12-15,68-71,76-79
      NUMA node2 CPU(s):     16-19,24-27,80-83,88-91
      NUMA node3 CPU(s):     20-23,28-31,84-87,92-95
      NUMA node4 CPU(s):     32-35,40-43,96-99,104-107
      NUMA node5 CPU(s):     36-39,44-47,100-103,108-111
      NUMA node6 CPU(s):     48-51,56-59,112-115,120-123
      NUMA node7 CPU(s):     52-55,60-63,116-119,124-127
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 22528 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
```


(Continued on next page)

Platform Notes (Continued)

```
   node 0 size: 191756 MB
   node 0 free: 185945 MB
   node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
   node 1 size: 193524 MB
   node 1 free: 190070 MB
   node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
   node 2 size: 193524 MB
   node 2 free: 190127 MB
   node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
   node 3 size: 193524 MB
   node 3 free: 190148 MB
   node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
   node 4 size: 193524 MB
   node 4 free: 190115 MB
   node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
   node 5 size: 193524 MB
   node 5 free: 190169 MB
   node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
   node 6 size: 193524 MB
   node 6 free: 190081 MB
   node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
   node 7 size: 193363 MB
   node 7 free: 190026 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  20  20  20  20  20  20  20
     1:  20  10  20  20  20  20  20  20
     2:  20  20  10  20  20  20  20  20
     3:  20  20  20  10  20  20  20  20
     4:  20  20  20  20  10  20  20  20
     5:  20  20  20  20  20  10  20  20
     6:  20  20  20  20  20  20  10  20
     7:  20  20  20  20  20  20  20  10

 From /proc/meminfo
    MemTotal:       1583376236 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
```

(Continued on next page)

Platform Notes (Continued)

```
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-52qc 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 May 4 18:55

 SPEC is set to: /home/cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda4      btrfs  697G  170G  527G  25% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 0.80 02/24/2018
   Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-04 11:40:53-0400.
Report generated on 2018-10-31 18:08:07 by CPU2017 PS formatter v6067.
Originally published on 2018-06-13.